

Быстроразъемные соединения QС1

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47


Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Features


- ❖ Maximum working pressure up to 3000 psig (206 bar)
- ❖ Push to connect and pull on knurled sleeve to disconnect enables easy operation
- ❖ Minimal spillage upon disconnect and minimal air inclusion upon connect
- ❖ Materials: stainless steel or brass
- ❖ Wide range of seal materials available
- ❖ Single-end shutoff and double-end shutoff stems
- ❖ Large number of Superior locking balls retains stem
- ❖ Interchangeable and intermixable with major

Single-end Shutoff (SESO)

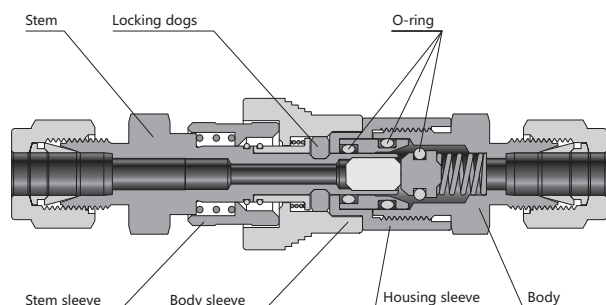

← Flow Direction ←

Double-end Shutoff (DESO)

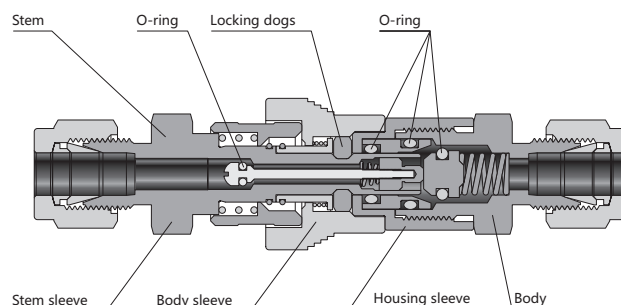

← Flow Direction ←

Materials of Construction

Component	Material	
	316 S.S.	Brass
Body, stem, body valve, body insert, DESO valve, DESO retainer	316 S.S.	Brass C36000
SESO stem insert	316 S.S.	Brass C26000
O-rings	Fluorocarbon FKM, ethylene propylene, perfluorocarbon FFKM	Buna N
Springs	316 S.S.	
Snap rings	302 S.S.	
Body sleeve	Powdered metal 300 series S.S.	Brass C36000
Housing	316 S.S.	Brass C36000
DESO stem sleeve	Polyurethane enamel-coated 316 S.S.	Polyurethane enamel-coated brass C36000
SESO stem sleeve	316 S.S.	Brass C36000
Locking dogs	Xylan®-coated 316 S.S. powdered metal	

Spillage and Air Inclusion

Series	Spillage cm ³	Air Inclusion cm ³
-4	0.3	0.3
-6	1.0	1.0
-8	3.0	3.0

Maximum Flow Rate at 70 °F (20 °C)

Series	Water Flow U.S. gal/min (L /min)
-4	4 (15)
-6	6 (22)
-8	10 (37)

Pressure-Temperature Ratings

-4 Series

Material	316S.S.			Brass
O-Ring Material	Fluoro-carbon FKM	Ethylene propylene	Perfluoro-carbon FFKM	BunaN
Temperature °F (°C)	PressureRating psig (bar)			
Coupled				
-50 (-45)	—	3000 (206)	—	—
0 (-17)	—	3000 (206)	—	2000 (137)
10 (-12)	3000 (206)	3000 (206)	—	2000 (137)
60 (15)	3000 (206)	3000 (206)	3000 (206)	2000 (137)
100 (37)	3000 (206)	3000 (206)	3000 (206)	2000 (137)
150 (65)	2750 (189)	2750 (189)	2750 (189)	1300 (89.5)
200 (93)	2300 (158)	2300 (158)	2300 (158)	700 (48.0)
250 (121)	1850 (127)	1850 (127)	1850 (127)	300 (20.6)
300 (148)	1400 (96.4)	1400 (96.4)	1400 (96.4)	—
350 (176)	950 (65.4)	—	950 (65.4)	—
400 (204)	500 (34.4)	—	500 (34.1)	—
500 (260)	—	—	150 (10.3)	—
Uncoupled and When Coupling and Uncoupling				
70 (20)	250 (17.2)			


-6 Series

Material	316S.S.			Brass
O-Ring Material	Fluoro-carbon FKM	Ethylene propylene	Perfluoro-carbon FFKM	BunaN
Temperature °F (°C)	Pressure Rating psig (bar)			
Coupled				
-50 (-45)	—	1500 (103)	—	—
0 (-17)	—	1500 (103)	—	1000 (68.9)
10 (-12)	1500 (103)	1500 (103)	—	1000 (68.9)
60 (15)	1500 (103)	1500 (103)	1500 (103)	1000 (68.9)
100 (37)	1500 (103)	1500 (103)	1500 (103)	1000 (68.9)
150 (65)	1350 (93.0)	1350 (93.0)	1350 (93.0)	700 (48.2)
200 (93)	1150 (79.2)	1150 (79.2)	1150 (79.2)	450 (31.0)
250 (121)	970 (66.8)	970 (66.8)	970 (66.8)	300 (20.6)
300 (148)	750 (51.6)	750 (51.6)	750 (51.6)	—
350 (176)	580 (39.9)	—	580 (39.9)	—
400 (204)	400 (27.5)	—	400 (27.5)	—
500 (260)	—	—	150 (10.3)	—
Uncoupled and When Coupling and Uncoupling				
70 (20)	250 (17.2)			

-8 Series

Material	316 S.S.			Brass
O-Ring Material	Fluoro-carbon FKM	Ethylene propylene	Perfluoro-carbon FFKM	Buna N
Temperature °F (°C)	Pressure Rating psig (bar)			
Coupled				
-50 (-45)	—	750 (51.6)	—	—
0 (-17)	—	750 (51.6)	—	500 (34.4)
10 (-12)	750 (51.6)	750 (51.6)	—	500 (34.4)
60 (15)	750 (51.6)	750 (51.6)	750 (51.6)	500 (34.4)
100 (37)	750 (51.6)	750 (51.6)	750 (51.6)	500 (34.4)
150 (65)	680 (46.8)	680 (46.8)	680 (46.8)	400 (27.5)
200 (93)	600 (41.3)	600 (41.3)	600 (41.3)	350 (24.1)
250 (121)	520 (35.8)	520 (35.8)	520 (35.8)	300 (20.6)
300 (148)	440 (30.3)	440 (30.3)	440 (30.3)	—
350 (176)	360 (24.8)	—	360 (24.8)	—
400 (204)	300 (20.6)	—	300 (20.6)	—
500 (260)	—	—	150 (10.3)	—
Uncoupledand When Couplingand Uncoupling				
70 (20)	250 (17.2)			

Single-End Shutoff Stems (SESO)

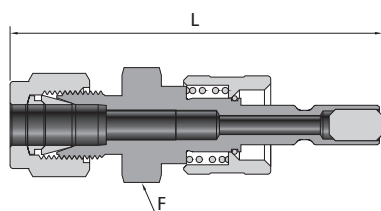


Tube Fitting

Tube Size in.	Basic Ordering Number	Flow Coefficient (Cv)	F in.	L in. (mm)
1/8	QC1-4-F2-S-	0.08	5/8	2.32 (58.9)
1/4	QC1-4-F4-S-	0.3	5/8	2.36 (59.9)
3/8	QC1-6-F6-S-	1.0	3/4	2.52 (64.0)
1/2	QC1-8-F8-S-	2.4	15/16	2.96 (75.2)
mm			mm	mm (in.)
6	QC1-4-M6-S-	0.3	16	59.9 (2.36)
10	QC1-6-M10-S-	1.0	19	67.3 (2.65)
12	QC1-8-M12-S-	2.4	24	75.2 (2.96)


Male NPT

NPT Size	Basic Ordering Number	Flow Coefficient (Cv)	F in.	L in. (mm)
1/8	QC1-4-NPT2-S-	0.3	5/8	2.07 (52.6)
1/4	QC1-4-NPT4-S-	0.3	5/8	2.22 (56.4)
1/4	QC1-6-NPT4-S-	0.8	3/4	2.32 (58.9)
3/8	QC1-6-NPT6-S-	0.8	3/4	2.35 (59.7)
1/2	QC1-8-NPT8-S-	2.0	15/16	2.84 (72.1)

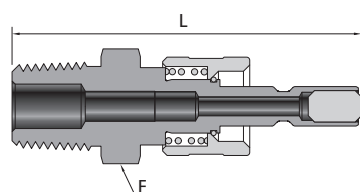


Female NPT

NPT Size	Basic Ordering Number	Flow Coefficient (Cv)	F in.	L in. (mm)
1/8	QC1-4-FNPT2-S-	0.3	5/8	2.01 (51.1)
1/4	QC1-4-FNPT4-S-	0.3	3/4	2.26 (57.4)
1/4	QC1-6-FNPT4-S-	0.8	3/4	2.35 (59.7)
3/8	QC1-6-FNPT6-S-	0.8	7/8	2.35 (59.7)
1/2	QC1-8-FNPT8-S-	2.0	1 1/16	2.82 (71.6)

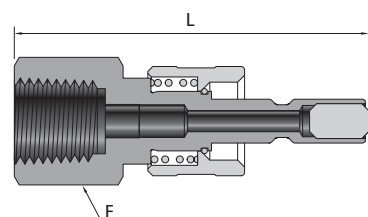


Male BSPT

BSPT Size	Basic Ordering Number	Flow Coefficient (Cv)	F in.	L in. (mm)
1/8	QC1-4-MBT2-S-	0.3	5/8	2.07 (52.6)
1/4	QC1-4-MBT4-S-	0.3	5/8	2.22 (56.4)
1/4	QC1-6-MBT4-S-	0.8	3/4	2.32 (58.9)
3/8	QC1-6-MBT6-S-	0.8	3/4	2.35 (59.7)
1/2	QC1-8-MBT8-S-	2.0	15/16	2.84 (72.1)

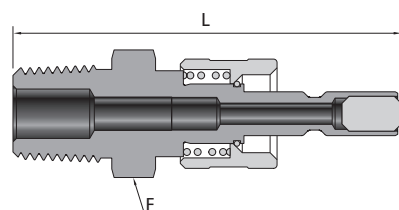


Female BSPT

BSPT Size	Basic Ordering Number	Flow Coefficient (Cv)	F in.	L in. (mm)
1/8	QC1-4-FBT2-S-	0.3	5/8	2.01 (51.1)
1/4	QC1-4-FBT4-S-	0.3	3/4	2.26 (57.4)
1/4	QC1-6-FBT4-S-	0.8	3/4	2.35 (59.7)
3/8	QC1-6-FBT6-S-	0.8	7/8	2.35 (59.7)
1/2	QC1-8-FBT8-S-	2.0	1 1/16	2.82 (71.6)

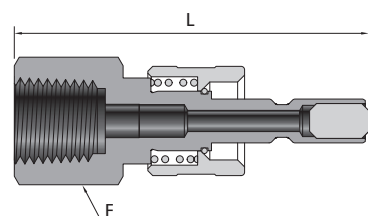


Male JIC(AN) 37° Flare

AN Tube Flare Size in.	Basic Ordering Number	Flow Coefficient (Cv)	F in.	L in. (mm)
1/4	QC1-4-AN4-S-	0.2	5/8	2.23 (56.6)
3/8	QC1-6-AN6-S-	1.0	3/4	2.35 (59.7)
1/2	QC1-8-AN8-S-	2.4	15/16	2.79 (70.9)

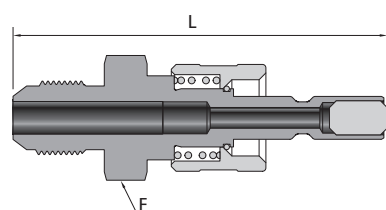

Single-End Shutoff Stems (SESO)

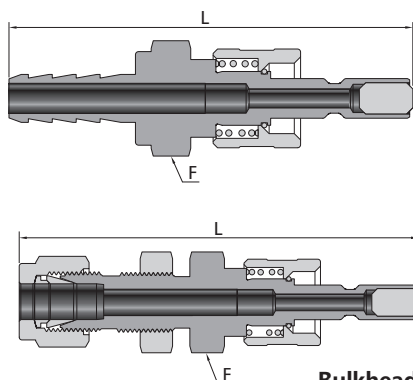


Hose Connector

Hose Size	Basic Ordering Number	Flow Coefficient (Cv)	F	L
in.			in.	in. (mm)
1/4	QC1-4-HC4-S-	0.2	5/8	2.47 (62.7)
3/8	QC1-6-HC6-S-	1.0	3/4	2.66 (67.6)
1/2	QC1-8-HC8-S-	2.4	15/16	3.07 (78.0)

Bulkhead Tube Fitting

Tube Size	Basic Ordering Number	Flow Coefficient (Cv)	F	L	Min. Panel Hole	Max. Panel Thickness
in.			in.	in. (mm)	in. (mm)	in. (mm)
1/4	QC1-4-BF4-S-	0.3	5/8	2.74 (69.6)	0.47 (11.9)	0.25 (6.4)
3/8	QC1-6-BF6-S-	1.0	3/4	2.92 (74.2)	0.60 (15.2)	0.27 (6.9)
1/2	QC1-8-BF8-S-	2.4	15/16	3.43 (87.1)	0.78 (19.8)	0.26 (6.6)
mm			mm	mm (in.)	mm (in.)	mm (in.)
6	QC1-4-BM6-S-	0.3	16	69.6 (2.74)	11.7 (0.46)	6.4 (0.25)
10	QC1-6-BM10-S-	1.0	22	77.7 (3.06)	16.8 (0.66)	6.9 (0.27)
12	QC1-8-BM12-S-	2.4	24	87.1 (3.43)	19.6 (0.77)	6.6 (0.26)

Double-End Shutoff Stems (DESO)

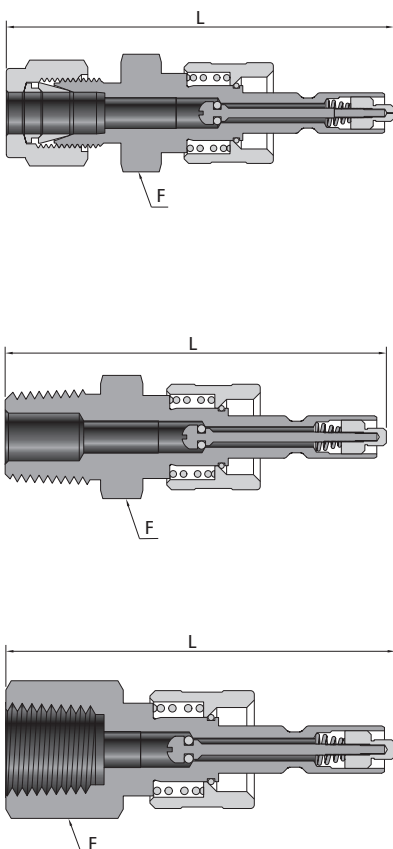

Tube Fitting

Tube Size	Basic Ordering Number	Flow Coefficient (Cv)	F	L
in.			in.	in. (mm)
1/8	QC1-4-F2-D-	0.08	5/8	2.77 (70.4)
1/4	QC1-4-F4-D-	0.2	5/8	2.42 (61.5)
3/8	QC1-6-F6-D-	0.5	3/4	2.64 (67.1)
1/2	QC1-8-F8-D-	1.5	15/16	3.16 (80.3)
mm			mm	mm (in.)
6	QC1-4-M6-D-	0.2	16	61.5 (2.42)
10	QC1-6-M10-D-	0.5	19	70.4 (2.77)
12	QC1-8-M12-D-	1.5	24	80.3 (3.16)


Male NPT

NPT Size	Basic Ordering Number	Flow Coefficient (Cv)	F	L
			in.	in. (mm)
1/8	QC1-4-NPT2-D-	0.2	5/8	2.13 (54.1)
1/4	QC1-4-NPT4-D-	0.2	5/8	2.28 (57.8)
1/4	QC1-6-NPT4-D-	0.5	3/4	2.44 (61.9)
3/8	QC1-6-NPT6-D-	0.5	3/4	2.47 (62.7)
1/2	QC1-8-NPT8-D-	1.3	15/16	3.04 (77.2)

Female NPT


NPT Size	Basic Ordering Number	Flow Coefficient (Cv)	F	L
			in.	in. (mm)
1/8	QC1-4-FNPT2-D-	0.2	5/8	2.07 (52.6)
1/4	QC1-4-FNPT4-D-	0.2	3/4	2.32 (58.9)
1/4	QC1-6-FNPT4-D-	0.5	3/4	2.47 (62.7)
3/8	QC1-6-FNPT6-D-	0.5	7/8	2.47 (62.7)
1/2	QC1-8-FNPT8-D-	1.3	1 1/16	3.04 (77.2)

Double-End Shutoff Stems (DESO)

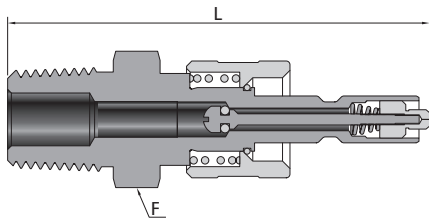


Male BSPT

BSPT Size	Basic Ordering Number	Flow Coefficient (Cv)	F	L
			in.	in. (mm)
1/8	QC1-4-MBT2-D-	0.2	5/8	2.13 (54.1)
1/4	QC1-4-MBT4-D-	0.2	5/8	2.28 (57.8)
1/4	QC1-6-MBT4-D-	0.5	3/4	2.44 (61.9)
3/8	QC1-6-MBT6-D-	0.5	3/4	2.47 (62.7)
1/2	QC1-8-MBT8-D-	1.3	15/16	3.04 (77.2)

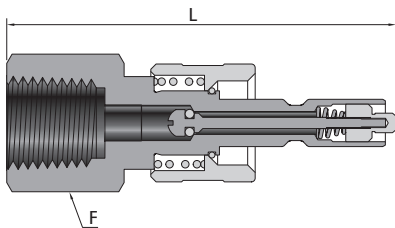


Female BSPT

BSPT Size	Basic Ordering Number	Flow Coefficient (Cv)	F	L
			in.	in. (mm)
1/8	QC1-4-FBT2-D-	0.2	5/8	2.07 (52.6)
1/4	QC1-4-FBT4-D-	0.2	3/4	2.32 (58.9)
1/4	QC1-6-FBT4-D-	0.5	3/4	2.47 (62.7)
3/8	QC1-6-FBT6-D-	0.5	7/8	2.47 (62.7)
1/2	QC1-8-FBT8-D-	1.3	1 1/16	3.04 (77.2)

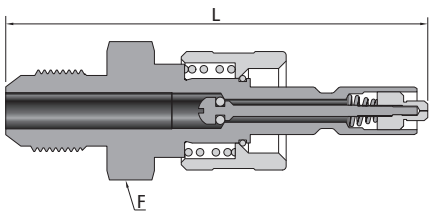


Male JIC(AN) 37° Flare

AN Tube Flare Size in.	Basic Ordering Number	Flow Coefficient (Cv)	F	L
			in.	in. (mm)
1/4	QC1-4-AN4-D-	0.2	5/8	2.29 (58.2)
3/8	QC1-6-AN6-D-	0.5	3/4	2.47 (62.7)
1/2	QC1-8-AN8-D-	1.5	15/16	2.99 (75.9)

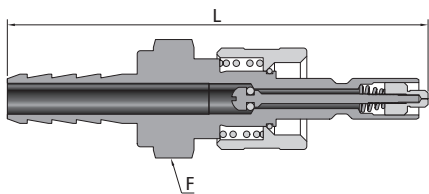

Hose Connector







Hose Size in.	Basic Ordering Number	Flow Coefficient (Cv)	F	L
			in.	in. (mm)
1/4	QC1-4-HC4-D-	0.2	5/8	2.53 (64.3)
3/8	QC1-6-HC6-D-	0.5	3/4	2.78 (70.6)
1/2	QC1-8-HC8-D-	1.5	15/16	3.27 (83.1)

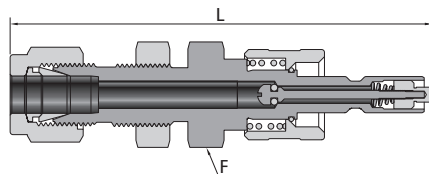

Bulkhead Tube Fitting

Tube Size in.	Basic Ordering Number	Flow Coefficient (Cv)	F	L	Min. Panel Hole in. (mm)	Max. Panel Thickness in. (mm)
			in.	in. (mm)		
1/4	QC1-4-BF4-D-	0.2	5/8	2.80 (71.1)	0.47 (11.9)	0.25 (6.4)
3/8	QC1-6-BF6-D-	0.5	3/4	3.07 (78.0)	0.60 (15.2)	0.27 (6.9)
1/2	QC1-8-BF8-D-	1.5	15/16	3.63 (92.2)	0.78 (19.8)	0.26 (6.6)
mm	——	——	mm	mm (in.)	mm (in.)	mm (in.)
6	QC1-4-BM6-D-	0.2	16	71.1 (2.80)	11.7 (0.46)	6.4 (0.25)
10	QC1-6-BM10-D-	0.5	22	78.7 (3.10)	16.8 (0.66)	6.9 (0.27)
12	QC1-8-BM12-D-	1.5	24	92.2 (3.63)	19.6 (0.77)	6.6 (0.26)

Bodies

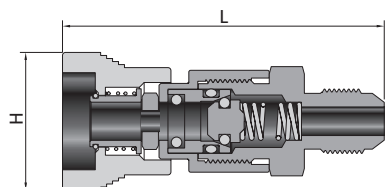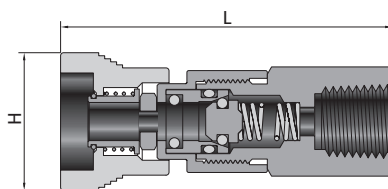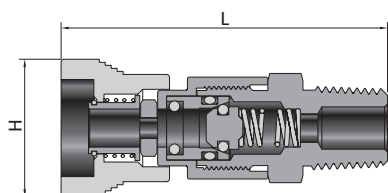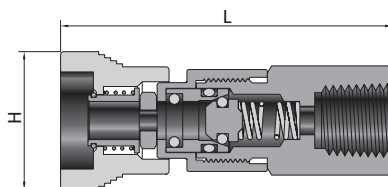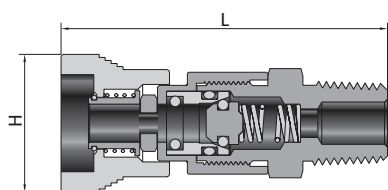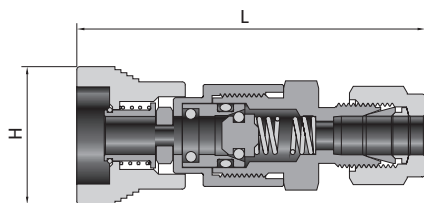

Tube Fitting

Tube Size	Basic Ordering Number	H	L
in.		in. (mm)	in. (mm)
1/8	QC1-4-F2-B-	0.91 (23.1)	2.26 (57.4)
1/4	QC1-4-F4-B-	0.91 (23.1)	2.30 (58.4)
3/8	QC1-6-F6-B-	1.03 (26.2)	2.58 (65.5)
1/2	QC1-8-F8-B-	1.21 (30.7)	3.09 (78.5)
mm	—	mm (in.)	mm (in.)
6	QC1-4-M6-B-	23.1 (0.91)	58.4 (2.30)
10	QC1-6-M10-B-	26.2 (1.03)	68.1 (2.68)
12	QC1-8-M12-B-	30.7 (1.21)	78.5 (3.09)

Male NPT

NPT Size	Basic Ordering Number	H	L
		in. (mm)	in. (mm)
1/8	QC1-4-NPT2-B-	0.91 (23.1)	2.01 (51.1)
1/4	QC1-4-NPT4-B-	0.91 (23.1)	2.16 (54.9)
1/4	QC1-6-NPT4-B-	1.03 (26.2)	2.38 (60.5)
3/8	QC1-6-NPT6-B-	1.03 (26.2)	2.38 (60.5)
1/2	QC1-8-NPT8-B-	1.21 (30.7)	2.97 (75.4)

Female NPT

NPT Size	Basic Ordering Number	H	L
		in. (mm)	in. (mm)
1/8	QC1-4-FNPT2-B-	0.91 (23.1)	2.16 (54.9)
1/4	QC1-4-FNPT4-B-	0.91 (23.1)	2.42 (61.5)
1/4	QC1-6-FNPT4-B-	1.03 (26.2)	2.54 (65.4)
3/8	QC1-6-FNPT6-B-	1.03 (26.2)	2.57 (65.3)
1/2	QC1-8-FNPT8-B-	1.21 (30.7)	3.22 (81.8)

Male BSPT

BSPT Size	Basic Ordering Number	H	L
		in. (mm)	in. (mm)
1/8	QC1-4-MBT2-B-	0.91 (23.1)	2.01 (51.1)
1/4	QC1-4-MBT4-B-	0.91 (23.1)	2.16 (54.9)
1/4	QC1-6-MBT4-B-	1.03 (26.2)	2.38 (60.5)
3/8	QC1-6-MBT6-B-	1.03 (26.2)	2.38 (60.5)
1/2	QC1-8-MBT8-B-	1.21 (30.7)	2.97 (75.4)

Female BSPT


BSPT Size	Basic Ordering Number	H	L
		in. (mm)	in. (mm)
1/8	QC1-4-FBT2-B-	0.91 (23.1)	2.16 (54.9)
1/4	QC1-4-FBT4-B-	0.91 (23.1)	2.42 (61.5)
1/4	QC1-6-FBT4-B-	1.03 (26.2)	2.54 (65.4)
3/8	QC1-6-FBT6-B-	1.03 (26.2)	2.57 (65.3)
1/2	QC1-8-FBT8-B-	1.21 (30.7)	3.22 (81.8)

Male JIC (AN) 37° Flare

AN Tube Flare Size	Basic Ordering Number	H	L
in.		in. (mm)	in. (mm)
1/4	QC1-4-AN4-B-	0.91 (23.1)	2.17 (55.1)
3/8	QC1-6-AN6-B-	1.03 (26.2)	2.41 (61.2)
1/2	QC1-8-AN8-B-	1.21 (30.7)	2.92 (74.2)


Bodies

Hose Connector

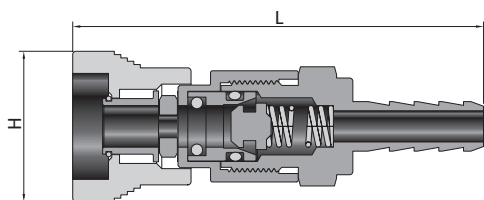

Hose Size	Basic Ordering Number	Flow Coefficient (Cv)	H	L
in.			in. (mm)	in. (mm)
1/4	QC1-4-HC4-B-	0.3	0.91 (23.1)	2.41 (61.2)
3/8	QC1-6-HC6-B-	1.5	1.03 (26.2)	2.72 (69.1)
1/2	QC1-8-HC8-B-	3.3	1.21 (30.7)	3.20 (81.3)

Bulkhead Tube Fitting

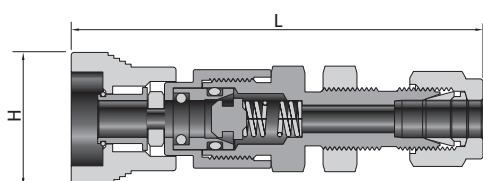

Tube Size	Basic Ordering Number	Flow Coefficient (Cv)	H	L	Min. Panel Hole	Max. Panel Thickness
in.			in. (mm)	in. (mm)	in. (mm)	in. (mm)
1/4	QC1-4-BF4-B-	0.4	0.91 (23.1)	2.67 (67.8)	0.47 (11.9)	0.25 (6.4)
3/8	QC1-6-BF6-B-	1.5	1.03 (26.2)	2.98 (75.7)	0.60 (15.2)	0.27 (6.9)
1/2	QC1-8-BF8-B-	3.3	1.21 (30.7)	3.56 (90.4)	0.78 (19.8)	0.26 (6.6)
mm			mm (in.)	mm (in.)	mm (in.)	mm (in.)
6	QC1-4-BM6-B-	0.4	23.1 (0.91)	67.8 (2.67)	11.7 (0.46)	6.4 (0.25)
10	QC1-6-BM10-B-	1.5	26.2 (1.03)	75.9 (2.99)	16.8 (0.66)	6.9 (0.27)
12	QC1-8-BM12-B-	3.3	30.7 (1.21)	90.4 (3.56)	19.6 (0.77)	6.6 (0.26)

Keyed QC1 Series


❖ Hikelok keyed quick-connects provide a positive mechanical lockout system to prevent accidental intermixing of different lines in multifluid or multipressure systems.

QC1 Series Key Numbers and Sleeve Outside Diameters

Key Number and Color	QC4		QC6		QC8	
	Body Sleeve	Stem Sleeve	Body Sleeve	Stem Sleeve	Body Sleeve	Stem Sleeve
	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)	in. (mm)
K1 black	0.96 (24.4)	0.82 (20.8)	1.13 (28.7)	0.99 (25.1)	1.26 (32.0)	1.10 (27.9)
K2 orange	0.99 (25.1)	0.85 (21.6)	1.16 (29.5)	1.02 (25.9)	1.29 (32.8)	1.14 (29.0)
K3 green	1.02 (25.9)	0.88 (22.4)	1.19 (30.2)	1.05 (26.7)	1.32 (33.5)	1.17 (29.7)
K4 yellow	1.05 (26.7)	0.91 (23.1)	1.22 (31.0)	1.08 (27.4)	1.35 (34.3)	1.20 (30.5)
K5 blue	1.08 (27.4)	0.94 (23.9)	1.24 (31.5)	1.11 (28.2)	1.38 (35.1)	1.23 (31.2)
K6 white	1.11 (28.2)	0.97 (24.6)	1.28 (32.5)	1.14 (29.0)	1.41 (35.8)	1.26 (32.0)
K7 purple	1.14 (29.0)	1.00 (25.4)	1.31 (33.3)	1.17 (29.7)	1.44 (36.6)	1.29 (32.8)
K8 brown	1.17 (29.7)	1.03 (26.2)	1.34 (34.0)	1.20 (30.5)	1.47 (37.3)	1.32 (33.5)


❖ To order a Keyed QC1 Series, add key number (K1 to K8) as a prefix to the basic ordering number
Example: QC1-4-F4-316-K2

Stem Protector



Series	Basic Ordering Number
-4	QC1-4-SP-
-6	QC1-6-SP-
-8	QC1-8-SP-

Body Protector



Series	Basic Ordering Number
-4	QC1-4-BP-
-6	QC1-6-BP-
-8	QC1-8-BP-

❖ To order a protector, add material designator (316 or Brass) as a prefix to the basic ordering number

Example: QC1-4-SP-316

❖ To order a keyed protector, add material designator (316 or Brass) as a prefix and key designator from the table below as a suffix to the ordering number

Example: QC1-4-BP-316-K1

How to Order

QC1 — 6 — M10 — BD — 316

Series	Size	End Connection Type	End Connection Size	Stem or Body	Body Material
QC1	4	FNPT Female NPT	4 1/4 in.	S Stem without valve remains open when uncoupled	316 316 S.S.
	6	NPT Male NPT	6 3/8 in. or 6 mm	D Stem with valve shuts off when uncoupled	316L 316L S.S.
	8	FBT Female BSPT	8 1/2 in. or 8 mm	B Body with valve	304 304 S.S.
		MBT Male BSPT	10 5/8 in. or 10 mm	BS Stem without valve +Body witht valve	304L 304L S.S.
		MS Male ISO 261 (for BG)	12 3/4 in. or 12 mm		BR Brass
		F Fractional Tube Fitting	14 M14 x 1.5	BD Stem with valve +Body witht valve	
		M Metric Tube Fitting	16 1 in.or 16 mm		
		FT Metri Tube Adapter	18 M18 x 1.5		
			MT Fractional Tube Adapter	20 M20 x 1.5	

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93