

Трубные обжимные фитинги с ДВОЙНЫМ КОЛЬЦОМ

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93


Contents

Male Connectors




4

Bulkhead Male Connectors




15

Thermocouple Connectors




17

Female Connectors




18

Bulkhead Female Connectors




23

Unions



24

Conversion Unions




25

Reducing Unions




25

Bulkhead Unions




27

Bulkhead Reducing Unions




27

Male Elbows




29

45° Male Elbows




32

Adjustable Male Elbows




33

45° Adjustable Male Elbows




35

Female Elbows




36

Union Elbows




37

Union Reducing Elbows




38

Male Branch Tees




39

Male Run Tees



40


Adjustable Male Branch Tees



41


Contents

Adjustable Male Run Tees




42

Female Branch Tees




43

Female Run Tees




44

Union Tees




45

Reducing Union Tees



46

Union Crosses



48

Caps




49

Plugs



49

Reducers




50

Port Connectors




52

Reducing Port Connectors




53

Male Adapters




53

Female Adapters




58

Flange Adapters




61

Sanitary Flange Fittings



62

KF Vacuum Flange Fittings




62

Weld Connectors



63


Weld Elbows



64

Contents

Male Nuts

	65
---	----


Front Ferrules

	66
---	----


Rear Ferrules

	66
---	----

Nuts + Ferrules

	67
--	----

Insert for Soft Plastic Tubings

	68
---	----

BS Gaskets

	69
---	----

BP Gaskets

	70
---	----

BG Gaskets

	70
---	----

O-rings

	71
---	----

Features

- ❖ Twin ferrule fittings provide metal-to-metal seal connections, non-elastomeric seals for leak-free connections
- ❖ Hikelok twin ferrule fittings are designed to have a maximum allowable working pressure that is higher than that of any tubing
- ❖ Industry standard design for all instrumentation grade tubing
- ❖ Stainless steel tube hardness: the hardness of the tube shall be not greater than 85 HRB
- ❖ Available in sizes from 1/16 to 2in and 2 mm to 50 mm
- ❖ Hikelok fittings materials include 316 stainless steel, steel, brass, aluminum, nickel-copper, Hastelloy C, 6Mo, Incoloy 625 and 825
- ❖ Hikelok special treated back ferrule is to provide secure
- ❖ Silver coated threads to reduce galling
- ❖ Leak-proof joints capable of satisfying high pressure vacuum and vibration applications

Performance

- ❖ Hydraulic proof pressure test (1.5 times the maximum permissible working pressure): no leakage
- ❖ Dismantling and reassembly test (dismantle 10 times): no leakage
- ❖ Minimum hydrostatic pressure test (4 times the maximum permissible ambient pressure rating): no leakage
- ❖ Vacuum test (1×10^{-4} mbar or greater): the leak rate less than 1×10^{-8}
- ❖ Maximum static gas pressure test (with nitrogen gas to 150% of pressure rating): no visible bubbles
- ❖ Hydraulic impulse and vibration test (the pressure impulses at between 0.5 Hz and 1.7 Hz and the vibration at between 23 Hz and 47 Hz): no leakage
- ❖ Thermal cycle test (ambient to +80 °C and then to -25 °C with a hydrostatic pressure): no evidence of leakage
- ❖ Pneumatic pressure vibration test (The frequency of vibration shall be set at 45 Hz and complete 20×10^6 cycles): without failure
- ❖ Fire test (in accordance with BS ISO 19921): no leakage
- ❖ Corrosion resistance test (the duration of exposure at least 168 h): no visible evidence of corrosion
- ❖ Deep water submersion test (equivalent to 3048 m of sea water): no helium detected

Materials Standards

Material	Bar Stock	Forgings
316 stainless steel	ASTM A276 ASME SA479, EN 1.4401	ASTM A182 ASME SA182, EN 1.4401
Alloy 20	ASTM B473	ASTM B462
Alloy 400/R-405	ASTM B164, ASME SB164	ASTM B564, ASME SB564
Alloy 600	ASTM B166, ASME SB166	ASTM B564, ASME SB564
Alloy 625	ASTM B446	ASTM B564, ASME SB564
Alloy 825	ASTM B425	ASTM B564, ASME SB564
Alloy C-276	ASTM B574	ASTM B564
Aluminum	ASTM B211	ASTM B247
Brass	ASTM B16, ASTM B453	ASTM B283
Carbon steel	ASTM A108	—
Duplex 2507	ASTM A479	ASTM A182
Titanium(grade 4)	ASTM B348	ASTM B381
PFA	—	ASTM D3307 Type I
PTFE	ASTM D1710	ASTM D3294

Thread Specifications

Thread Type (End Connection)	Reference Specification
NPT	ASME B1.20.1, SAE AS71051
ISO/BSP(parallel) (Based on DIN 3852) (HIKELOK PPT, BP, and BS fittings)	ISO 228, JIS B0202
ISO/BSP(tapered) (Based on DIN 3852) (Hikelok BT fittings)	ISO 7, BS EN 10226-1, JIS B0203
ISO/BSP(gauge) (Based on EN 837-1 and 837-3) (Hikelok BG)	ISO 228, JIS B0202
Unified (SAE) (Hikelok SA fittings)	ASME B1.1

NPT Thread Pressure Ratings

Ratings are based on ASME Code for Pressure Piping B31.3, Process Piping, at ambient temperature.

NPT/ISO Pipe Size	316 S.S. and Carbon Steel				Brass			
	Male		Female		Male		Female	
	psig	bar	psig	bar	psig	bar	psig	bar
1/16	11000	760	6700	460	5500	380	3300	230
1/8	10000	690	6500	440	5000	340	3200	220
1/4	8000	550	6600	450	4000	270	3300	220
3/8	7800	540	5300	360	3900	270	2600	180
1/2	7700	530	4900	330	3800	260	2400	160
3/4	7300	500	4600	320	3600	250	2300	160
1	5300	370	4400	300	2600	180	2200	150
1 1/4	6000	410	5000	350	3000	200	2500	170
1 1/2	5000	340	4600	310	2500	170	2300	150
2	3900	270	3900	270	1900	130	1900	130

To determine pressure ratings in accordance with ASME B31.1, Power Piping:
 stainless steel material-multiply by 0.94
 carbon steel material-multiply by 0.85
 Brass material ratings remain the same.

SAE/MS Thread Pressure Ratings

Pressure ratings are based on SAE J1926/3 at ambient temperature.

SAE/MS Thread Size	316 S.S. and Carbon Steel			
	Nonpositionable		positionable	
	psig	bar	psig	bar
5/16-24	4568	315	4568	315
7/16-20				
1/2-20				
9/16-18			3626	250
3/4-16				
7/8-14	3626	250	2900	200
1 1/16-12	2900	200	2320	160
1 3/16-12				
1 5/16-12	2320	160	1813	125
1 5/8-12				
1 7/8-12				
2 1/2-12	1813	125	1450	100

Some fittings with O-seal, and SAE/MS ends may have lower ratings.

Positionable, ISO/BSP Parallel Thread (PPT) Pressure Ratings


Pressure ratings are at ambient temperature.

ISO/BSP Male Pipe Size in.	316 S.S. and Carbon Steel	
	psig	bar
1/8	4568	315
1/4		
3/8		
1/2	2320	160
3/4		
1		

Types of Sealing for parallel threads


1. BS sealing: BS male thread end, BS gasket and BP female thread port

- ❖ BS male thread end complies with DIN 3852-2 type A
- ❖ BP female thread port complies with DIN 3852-2 type X




2. BP sealing: BP male thread end, BP gasket and BP female thread port

- ❖ BP male thread end complies with DIN 3852-2 type B
- ❖ BP female thread port complies with DIN 3852-2 type X
- ❖ The BP gasket can be used with a BS fitting




3. BG sealing: BG male thread end, BG gasket and BG female thread port

- ❖ BG female thread port complies with EN 837-1/3




4. PPT sealing: PPT male thread end and BP female thread port

- ❖ BP female thread port complies with DIN 3852-2 type X



Male Connectors

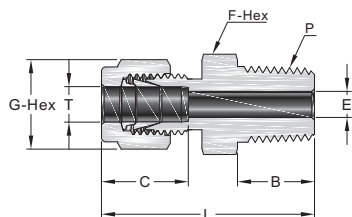


Fractional Tube

NPT Thread

T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
1/16	1/16	F1-MC-NPT1-	23.9	9.7	8.6	1.3	7.9	7.9
1/16	1/8	F1-MC-NPT2-	26.2	9.7	8.6	1.3	7.9	11.1
1/16	1/4	F1-MC-NPT4-	31.0	14.2	8.6	1.3	7.9	14.3
1/8	1/16	F2-MC-NPT1-	29.7	9.7	12.7	2.3	11.1	11.1
1/8	1/8	F2-MC-NPT2-	30.5	9.7	12.7	2.3	11.1	11.1
1/8	1/4	F2-MC-NPT4-	35.6	14.2	12.7	2.3	11.1	14.3
1/8	3/8	F2-MC-NPT6-	35.8	14.2	12.7	2.3	11.1	17.5
1/8	1/2	F2-MC-NPT8-	42.2	19.1	12.7	2.3	11.1	22.2
3/16	1/16	F3-MC-NPT1-	31.2	9.7	13.7	2.3	12.7	11.1
3/16	1/8	F3-MC-NPT2-	31.2	9.7	13.7	3.0	12.7	11.1
3/16	1/4	F3-MC-NPT4-	36.3	14.2	13.7	3.0	12.7	14.3
1/4	1/16	F4-MC-NPT1-	32.8	9.7	15.2	3.0	14.3	12.7
1/4	1/8	F4-MC-NPT2-	32.8	9.7	15.2	4.8	14.3	12.7
1/4	1/4	F4-MC-NPT4-	37.8	14.2	15.2	4.8	14.3	14.3
1/4	3/8	F4-MC-NPT6-	38.4	14.2	15.2	4.8	14.3	17.5
1/4	1/2	F4-MC-NPT8-	44.7	19.1	15.2	4.8	14.3	22.2
1/4	3/4	F4-MC-NPT12-	46.2	19.1	15.2	4.8	14.3	27.0
5/16	1/8	F5-MC-NPT2-	34.0	9.7	16.3	4.8	15.9	14.3
5/16	1/4	F5-MC-NPT4-	38.6	9.7	16.3	6.4	15.9	14.3
5/16	3/8	F5-MC-NPT6-	39.1	14.2	16.3	6.4	15.9	17.5
5/16	1/2	F5-MC-NPT8-	45.5	19.1	16.3	6.4	15.9	22.2
3/8	1/8	F6-MC-NPT2-	35.3	9.7	16.8	4.8	17.5	15.9
3/8	1/4	F6-MC-NPT4-	39.9	14.2	16.8	7.1	17.5	15.9
3/8	3/8	F6-MC-NPT6-	39.9	14.2	16.8	7.1	17.5	17.5
3/8	1/2	F6-MC-NPT8-	46.2	19.1	16.8	7.1	17.5	22.2
3/8	3/4	F6-MC-NPT12-	47.8	19.1	16.8	7.1	17.5	27.0
3/8	1	F6-MC-NPT16-	47.0	23.9	16.8	7.1	17.5	34.9
1/2	1/8	F8-MC-NPT2-	38.9	9.7	22.9	4.8	22.2	20.6
1/2	1/4	F8-MC-NPT4-	43.4	14.2	22.9	7.1	22.2	20.6
1/2	3/8	F8-MC-NPT6-	43.4	14.2	22.9	9.7	22.2	20.6
1/2	1/2	F8-MC-NPT8-	49.0	19.1	22.9	10.4	22.2	22.2
1/2	3/4	F8-MC-NPT12-	50.5	19.1	22.9	10.4	22.2	27.0
1/2	1	F8-MC-NPT16-	57.2	23.9	22.9	10.4	22.2	34.9
5/8	1/4	F10-MC-NPT4-	44.2	14.2	24.4	7.1	25.4	23.8
5/8	3/8	F10-MC-NPT6-	44.2	14.2	24.4	9.7	25.4	23.8
5/8	1/2	F10-MC-NPT8-	49.0	19.1	24.4	11.9	25.4	23.8
5/8	3/4	F10-MC-NPT12-	50.5	19.1	24.4	12.7	25.4	27.0
3/4	3/8	F12-MC-NPT6-	45.7	14.2	24.4	10.4	28.6	27.0
3/4	1/2	F12-MC-NPT8-	50.5	19.1	24.4	11.9	28.6	27.0
3/4	3/4	F12-MC-NPT12-	50.5	19.1	24.4	15.7	28.6	27.0
3/4	1	F12-MC-NPT16-	57.2	23.9	24.4	15.7	28.6	34.9
7/8	1/2	F14-MC-NPT8-	50.5	19.1	25.9	11.9	31.8	30.2
7/8	3/4	F14-MC-NPT12-	50.5	19.1	25.9	15.7	31.8	30.2
7/8	1	F14-MC-NPT16-	57.2	23.9	25.9	18.3	31.8	34.9
1	1/2	F16-MC-NPT8-	57.4	19.1	31.2	11.9	38.1	34.9
1	3/4	F16-MC-NPT12-	57.4	19.1	31.2	15.7	38.1	34.9
1	1	F16-MC-NPT16-	62.2	23.9	31.2	22.4	38.1	34.9
1 1/8	1	F18-MC-NPT16-	62.2	23.9	31.2	22.4	46.0	41.3
1 1/4	1	F20-MC-NPT16-	77.2	23.9	41.1	22.4	47.6	44.5
1 1/4	1 1/4	F20-MC-NPT20-	77.2	23.9	41.1	27.7	47.6	44.5
1 1/2	1 1/2	F24-MC-NPT24-	88.9	26.2	50.0	34.0	57.2	54.0


Male Connectors



Fractional Tube

ISO Tapered Thread (BSPT)

T-Tube O.D. (in.)	P-BSPT Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
1/8	1/8	F2-MC-MBT2-	30.5	9.7	12.7	2.3	11.1	11.1
1/8	1/4	F2-MC-MBT4-	35.6	14.2	12.7	2.3	11.1	14.3
1/4	1/8	F4-MC-MBT2-	32.8	9.7	15.2	4.8	14.3	12.7
1/4	1/4	F4-MC-MBT4-	37.8	14.2	15.2	4.8	14.3	14.3
1/4	3/8	F4-MC-MBT6-	38.4	14.2	15.2	4.8	14.3	17.5
1/4	1/2	F4-MC-MBT8-	44.7	19.1	15.2	4.8	14.3	22.2
5/16	1/8	F5-MC-MBT2-	34.0	9.7	16.3	4.8	15.9	14.3
5/16	1/4	F5-MC-MBT4-	38.6	9.7	16.3	6.4	15.9	14.3
3/8	1/8	F6-MC-MBT2-	35.3	9.7	16.8	4.8	17.5	15.9
3/8	1/4	F6-MC-MBT4-	39.9	14.2	16.8	7.1	17.5	15.9
3/8	3/8	F6-MC-MBT6-	39.9	14.2	16.8	7.1	17.5	17.5
3/8	1/2	F6-MC-MBT8-	46.2	19.1	16.8	7.1	17.5	22.2
3/8	3/4	F6-MC-MBT12-	47.8	19.1	16.8	7.1	17.5	27.0
1/2	1/4	F8-MC-MBT4-	43.4	14.2	22.9	7.1	22.2	20.6
1/2	3/8	F8-MC-MBT6-	43.4	14.2	22.9	9.7	22.2	20.6
1/2	1/2	F8-MC-MBT8-	49.0	19.1	22.9	10.4	22.2	22.2
1/2	3/4	F8-MC-MBT12-	50.5	19.1	22.9	10.4	22.2	27.0
5/8	1/2	F10-MC-MBT8-	49.0	19.1	24.4	11.9	25.4	23.8
3/4	3/4	F12-MC-MBT12-	50.5	19.1	24.4	15.7	28.6	27.0
3/4	1	F12-MC-MBT16-	57.2	23.9	24.4	15.7	28.6	34.9
1	3/4	F16-MC-MBT12-	57.4	19.1	31.2	15.7	38.1	34.9
1	1	F16-MC-MBT16-	62.2	23.9	31.2	22.4	38.1	34.9






Fractional Tube

ISO Parallel Thread (BS)

T-Tube O.D. (in.)	P-BS Size	Basic Ordering Number	Dimension, mm						
			L	B	C	E	G	F	D
1/8	1/8	F2-MC-MBS2-	30.0	7.1	12.7	2.3	11.1	14.3	13.7
1/8	1/4	F2-MC-MBS4-	35.3	11.2	12.7	2.3	11.1	19.1	18.0
1/8	3/8	F2-MC-MBS6-	36.3	11.2	12.7	2.3	11.1	22.2	21.8
1/4	1/8	F4-MC-MBS2-	32.3	7.1	15.2	4.0	14.3	14.3	13.7
1/4	1/4	F4-MC-MBS4-	37.6	11.2	15.2	4.8	14.3	19.1	18.0
1/4	3/8	F4-MC-MBS6-	38.9	11.2	15.2	4.8	14.3	22.2	21.8
1/4	1/2	F4-MC-MBS8-	44.7	14.2	15.2	4.8	14.3	27.0	25.9
3/8	1/8	F6-MC-MBS2-	37.8	7.1	16.8	4.0	17.5	15.9	13.7
3/8	1/4	F6-MC-MBS4-	39.1	11.2	16.8	5.9	17.5	19.1	18.0
3/8	3/8	F6-MC-MBS6-	40.4	11.2	16.8	7.1	17.5	22.2	21.8
3/8	1/2	F6-MC-MBS8-	46.2	14.2	16.8	7.1	17.5	27.0	25.9
1/2	1/4	F8-MC-MBS4-	42.7	11.2	22.9	5.9	22.2	20.6	18.0
1/2	3/8	F8-MC-MBS6-	43.2	11.2	22.9	7.9	22.2	22.2	21.8
1/2	1/2	F8-MC-MBS8-	49.0	14.2	22.9	10.4	22.2	27.0	25.9
3/4	1/2	F12-MC-MBS8-	49.0	14.2	24.4	11.9	28.6	27.0	25.9
3/4	3/4	F12-MC-MBS12-	52.9	15.7	24.4	15.7	28.6	33.3	32.0
1	1/2	F16-MC-MBS8-	55.5	14.2	31.2	11.9	38.1	34.9	25.9
1	3/4	F16-MC-MBS12-	57.7	15.7	31.2	16.0	38.1	34.9	32.0
1	1	F16-MC-MBS16-	59.9	18.3	31.2	19.8	38.1	41.3	39.1

Male Connectors

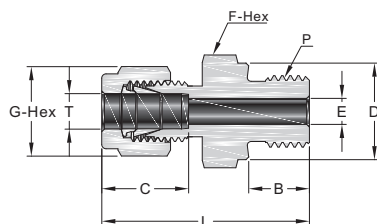

Adapt to straight thread boss of
SAE J1926-1, ISO 11926-1 and MS 16142.

Fractional Tube

ISO Parallel Thread (BP)

T-Tube O.D. (in.)	P-BP Size	Basic Ordering Number	Dimension, mm						
			L	B	C	E	G	F	D
1/8	1/8	F2-MC-PMBP2-	30.0	7.1	12.7	2.3	11.1	14.3	13.7
1/8	1/4	F2-MC-PMBP4-	35.3	11.2	12.7	2.3	11.1	19.1	18.0
1/4	1/8	F4-MC-PMBP2-	32.3	7.1	15.2	4.1	14.3	14.3	13.8
1/4	1/4	F4-MC-PMBP4-	37.6	11.2	15.2	4.8	14.3	19.1	18.0
1/2	3/8	F8-MC-PMBP6-	40.4	11.2	22.9	7.9	22.2	22.2	21.8
1/2	1/2	F8-MC-PMBP8-	49.0	14.2	22.9	10.4	22.2	27.0	25.9
3/4	1/2	F12-MC-PMBP8-	49.0	14.2	24.4	11.9	28.6	27.0	25.9
3/4	3/4	F12-MC-PMBP12-	52.9	15.7	24.4	15.7	28.6	33.3	32
1	1	F16-MC-PMBP16-	59.9	18.3	31.2	19.8	38.1	41.3	39.1

Fractional Tube


ISO Parallel Thread (BG)

T-Tube O.D. (in.)	P-BG Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
1/4	3/8	F4-MC-MBP6-	38.4	14.2	15.2	4.8	14.3	17.5
3/8	3/8	F6-MC-MBP6-	39.9	14.2	16.8	7.1	17.5	17.5

Fractional Tube

SAE/MS Straight Thread


T-Tube O.D. (in.)	P-SAE/MS Thread Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
1/16	5/16-24	F1-MC-OST5-	23.4	7.6	8.6	1.3	7.9	11.1
1/8	5/16-24	F2-MC-OST5-	30.0	7.6	12.7	2.3	11.1	11.1
1/8	7/16-20	F2-MC-OST7-	31.5	9.1	12.7	2.3	11.1	14.3
1/8	9/16-18	F2-MC-OST9-	33.3	9.9	12.7	2.3	11.1	17.5
3/16	3/8-24	F3-MC-OST6-	30.5	7.6	13.7	3.0	12.7	12.7
1/4	5/16-24	F4-MC-OST5-	32.3	7.6	15.2	2.3	14.3	12.7
1/4	7/16-20	F4-MC-OST7-	34.0	9.1	15.2	4.8	14.3	14.3
1/4	9/16-18	F4-MC-OST9-	35.6	9.9	15.2	4.8	14.3	17.5
1/4	3/4-16	F4-MC-OST12-	37.6	11.2	15.2	4.8	14.3	22.2
1/4	7/8-14	F4-MC-OST14-	40.6	12.7	15.2	4.8	15.9	25.4
5/16	1/2-20	F5-MC-OST8-	34.8	9.1	16.3	6.4	17.5	15.9
3/8	7/16-20	F6-MC-OST7-	35.6	9.1	16.8	5.1	17.5	15.9
3/8	9/16-18	F6-MC-OST9-	37.1	9.9	16.8	7.1	17.5	17.5
3/8	3/4-16	F6-MC-OST12-	39.1	11.2	16.8	7.1	17.5	22.2
3/8	7/8-14	F6-MC-OST14-	42.2	12.7	22.9	7.1	17.5	25.4
1/2	9/16-18	F8-MC-OST9-	39.1	9.9	22.9	7.1	22.2	20.6
1/2	3/4-16	F8-MC-OST12-	41.9	11.2	22.9	10.4	22.2	22.2
1/2	7/8-14	F8-MC-OST14-	45.0	12.7	22.9	10.4	22.2	25.4
1/2	1 1/16-12	F8-MC-OST17-	49.0	15.0	22.9	10.4	22.2	31.8
5/8	3/4-16	F10-MC-OST12-	41.9	11.2	24.4	10.7	25.4	23.8
5/8	7/8-14	F10-MC-OST14-	45.2	12.7	24.4	12.7	25.4	25.4
3/4	3/4-16	F12-MC-OST12-	46.0	11.2	24.4	10.7	28.6	27.0
3/4	1 1/16-12	F12-MC-OST17-	49.0	15.0	24.4	15.7	28.6	31.8
3/4	1 5/16-12	F12-MC-OST21-	49.8	15.0	24.4	16.0	28.6	38.1
7/8	1 3/16-12	F14-MC-OST19-	49.0	15.0	25.9	18.3	31.8	34.9
1	1 1/16-12	F16-MC-OST17-	53.3	15.0	31.2	16.8	38.1	34.9
1	1 5/16-12	F16-MC-OST21-	54.4	15.0	31.2	22.4	38.1	38.1
1 1/4	1 5/8-12	F20-MC-OST26-	68.3	15.0	41.1	27.7	47.6	47.6
1 1/2	1 7/8-12	F24-MC-OST30-	77.7	15.0	50.0	34.0	57.2	54.0

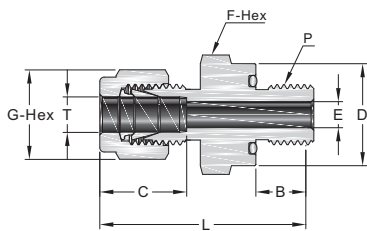

Fractional Tube

O-Seal with SAE/MS Straight Thread


T-Tube O.D. (in.)	P-SAE/MS Thread Size	Basic Ordering Number	Dimension, mm						
			L	B	C	E	G	F	D
1/16	5/16-24	F1-MC-STO5-	26.7	8.6	8.6	1.3	7.9	14.3	14.0
1/8	5/16-24	F2-MC-STO5-	32.8	8.6	12.7	2.3	11.1	14.3	14.0
3/16	3/8-24	F3-MC-STO6-	34.3	9.7	13.7	3.0	12.7	15.9	15.7
1/4	7/16-20	F4-MC-STO7-	38.4	10.4	15.2	4.8	14.3	19.1	18.8
5/16	1/2-20	F5-MC-STO8-	40.6	11.2	16.3	6.4	15.9	22.2	21.8
3/8	9/16-18	F6-MC-STO9-	42.4	11.9	16.8	7.1	17.5	23.8	23.6
1/2	3/4-16	F8-MC-STO12-	46.0	11.9	22.9	10.4	22.2	28.6	28.4
3/4	1 1/16-12	F12-MC-STO17-	52.3	14.2	24.4	15.7	28.6	38.1	37.8
1	1 5/16-12	F16-MC-STO21-	58.2	14.2	31.2	22.4	38.1	44.5	44.2

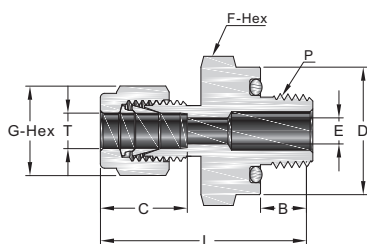

Fractional Tube

O-Seal with NPT Thread

T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, mm						
			L	B	C	E	G	F	D
1/8	1/8	F2-MC-NPTO2-	32.8	7.1	8.6	2.3	11.1	19.1	18.8
1/4	1/8	F4-MC-NPTO2-	35.1	7.1	15.2	4.8	14.3	19.1	18.8
1/4	1/4	F4-MC-NPTO4-	38.4	9.7	15.2	4.8	14.3	23.8	23.6
3/8	1/4	F6-MC-NPTO4-	39.9	9.7	16.8	7.1	17.5	23.8	23.6
3/8	3/8	F6-MC-NPTO6-	41.4	10.4	16.8	7.1	17.5	28.6	28.4
3/8	1/2	F6-MC-NPTO8-	47.0	13.5	16.8	7.1	17.5	33.3	33.0
1/2	1/2	F8-MC-NPTO8-	49.8	13.5	22.9	10.4	22.2	33.3	33.0





Fractional Tube


37° Flare (AN)

T-Tube O.D. (in.)	AN Tube Flare Size	Basic Ordering Number	Dimension, in. (mm)					
			L	B	C	E	G	F
1/16	1/8	F1-MC-AN2-	1.07(27.2)	0.45(11.4)	0.34(8.6)	0.05(1.3)	0.31(7.9)	0.44(11.1)
1/8	1/8	F2-MC-AN2-	1.27(32.3)	0.45(11.4)	0.50(12.7)	0.06(1.5)	0.44(11.1)	0.44(11.1)
1/8	1/4	F2-MC-AN4-	1.38(35.1)	0.55(14.0)	0.50(12.7)	0.09(2.3)	0.44(11.1)	0.50(12.7)
3/16	3/16	F3-MC-AN3-	1.32(33.5)	0.48(12.2)	0.54(13.7)	0.09(2.3)	0.50(12.7)	0.44(11.1)
1/4	1/4	F4-MC-AN4-	1.48(37.6)	0.55(14.0)	0.60(15.2)	0.17(4.3)	0.56(14.3)	0.50(12.7)
5/16	5/16	F5-MC-AN5-	1.51(38.4)	0.55(14.0)	0.64(16.2)	0.23(5.8)	0.63(15.9)	0.56(14.3)
3/8	1/4	F6-MC-AN4-	1.56(39.6)	0.55(14.0)	0.66(16.8)	0.17(4.3)	0.69(17.5)	0.63(15.9)
3/8	3/8	F6-MC-AN6-	1.56(39.6)	0.56(14.1)	0.66(16.8)	0.28(7.1)	0.69(17.5)	0.63(15.9)
1/2	1/2	F8-MC-AN8-	1.81(46.0)	0.66(16.7)	0.90(22.8)	0.39(9.9)	0.87(22.2)	0.81(20.6)
5/8	5/8	F10-MC-AN10-	1.93(49.0)	0.76(19.3)	0.96(24.5)	0.48(12.3)	1.00(25.4)	0.94(23.8)
3/4	3/4	F12-MC-AN12-	2.10(53.3)	0.86(21.9)	0.96(24.4)	0.61(15.5)	1.13(28.6)	1.13(28.6)
1	1	F16-MC-AN16-	2.42(61.5)	0.91(23.1)	1.23(31.2)	0.84(21.3)	1.50(38.1)	1.37(34.9)

Male Connectors

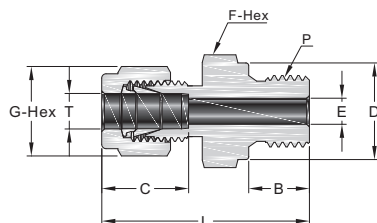

Adapt to straight thread boss of ISO 6149-1.



Fractional Tube

Metric Thread (BSMS)

T-Tube O.D. (in.)	P-Metric Thread Size	Basic Ordering Number	Dimension, mm						
			L	B	C	E	G	F	D
1/8	M14x1.5	F2-MC-BSMS14-	36.7	12	12.7	2.3	11.1	19.1	19
1/8	M16x1.5	F2-MC-BSMS16-	37.5	12	12.7	2.3	11.1	22.2	21
1/8	M18x1.5	F2-MC-BSMS18-	38.5	12	12.7	2.3	11.1	23.8	23
1/8	M20x1.5	F2-MC-BSMS20-	41.1	14	12.7	2.3	11.1	25.4	25
1/4	M14x1.5	F4-MC-BSMS14-	38.0	12	15.2	4.8	14.3	19.1	19
1/4	M16x1.5	F4-MC-BSMS16-	39.9	12	15.2	4.8	14.3	22.2	21
1/4	M18x1.5	F4-MC-BSMS18-	40.8	12	15.2	4.8	14.3	23.8	23
1/4	M20x1.5	F4-MC-BSMS20-	43.6	14	15.2	4.8	14.3	25.4	25
3/8	M14x1.5	F6-MC-BSMS14-	41.3	12	16.8	7.1	17.5	19.1	19
3/8	M16x1.5	F6-MC-BSMS16-	41.3	12	16.8	7.1	17.5	22.2	21
3/8	M18x1.5	F6-MC-BSMS18-	41.8	12	16.8	7.1	17.5	23.8	23
3/8	M20x1.5	F6-MC-BSMS20-	45.1	14	16.8	7.1	17.5	25.4	25
1/2	M16x1.5	F8-MC-BSMS16-	44.0	12	22.9	9.0	22.2	22.2	21
1/2	M18x1.5	F8-MC-BSMS18-	44.0	12	22.9	10.0	22.2	23.8	23
1/2	M20x1.5	F8-MC-BSMS20-	47.9	14	22.9	10.4	22.2	25.4	25
1/2	M22x1.5	F8-MC-BSMS22-	48.5	14	22.9	10.4	22.2	27.0	27

Fractional Tube

Metric Thread (OMS)


T-Tube O.D. (in.)	P-Metric Thread Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
1/4	M14X1.5	F4-MC-OMS14-	35.2	11	15.2	4.8	14.3	19.1
3/8	M14X1.5	F6-MC-OMS14-	36.7	11	16.8	7.1	17.5	19.1
3/8	M20X1.5	F6-MC-OMS20-	41.2	14	16.8	7.1	17.5	27.0
1/2	M14X1.5	F8-MC-OMS14-	40.2	11	22.9	7.5	22.2	20.6
1/2	M20X1.5	F8-MC-OMS20-	44.0	14	22.9	10.4	22.2	27.0

Fractional Tube

Metric Thread (MS)

T-Tube O.D. (in.)	P-Metric Thread Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
1/16	M5x0.8	F1-MC-MS5-	21.8	8	8.6	1.3	7.9	7.9
1/8	M14x1.5	F2-MC-MS14-	34.8	13	12.7	2.3	11.1	15.9
1/8	M16x1.5	F2-MC-MS16-	35.8	14	12.7	2.3	11.1	17.5
1/8	M18x1.5	F2-MC-MS18-	37.2	15	12.7	2.3	11.1	19.1
1/8	M20x1.5	F2-MC-MS20-	38.2	16	12.7	2.3	11.1	22.2
1/4	M14x1.5	F4-MC-MS14-	36.9	13	15.2	4.8	14.3	15.9
1/4	M16x1.5	F4-MC-MS16-	38.1	14	15.2	4.8	14.3	17.5
1/4	M18x1.5	F4-MC-MS18-	39.5	15	15.2	4.8	14.3	19.1
1/4	M20x1.5	F4-MC-MS20-	40.7	16	15.2	4.8	14.3	22.2
3/8	M10x1.0	F4-MC-MS10-	36.4	11	16.8	4.8	17.5	15.9
3/8	M14x1.5	F6-MC-MS14-	39.3	13	16.8	7.1	17.5	15.9
3/8	M16X1.5	F6-MC-MS16-	39.7	14	16.8	7.1	17.5	17.5
3/8	M18x1.5	F6-MC-MS18-	41.5	15	16.8	7.1	17.5	19.1
3/8	M20x1.5	F6-MC-MS20-	42.3	16	16.8	7.1	17.5	22.2
1/2	M16x1.5	F8-MC-MS16-	43.2	14	22.9	8.4	22.2	20.6
1/2	M18x1.5	F8-MC-MS18-	43.7	15	22.9	9.6	22.2	20.6
1/2	M20x1.5	F8-MC-MS20-	44.9	16	22.9	10.4	22.2	22.2
1/2	M22x1.5	F8-MC-MS22-	47.0	17	22.9	10.4	22.2	23.8

Male Connectors




Metric Tube

NPT Thread

T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
2	1/8	M2-MC-NPT2-	30.5	9.7	12.9	1.7	12	12
3	1/8	M3-MC-NPT2-	30.5	9.7	12.9	2.4	12	12
3	1/4	M3-MC-NPT4-	35.6	14.2	12.9	2.4	12	14
4	1/8	M4-MC-NPT2-	31.2	9.7	13.7	2.4	12	12
4	1/4	M4-MC-NPT4-	36.3	14.2	13.7	2.4	12	14
6	1/8	M6-MC-NPT2-	32.8	9.7	15.3	4.8	14	14
6	1/4	M6-MC-NPT4-	37.9	14.2	15.3	4.8	14	14
6	3/8	M6-MC-NPT6-	38.4	14.2	15.3	4.8	14	18
6	1/2	M6-MC-NPT8-	44.7	19.1	15.3	4.8	14	22
8	1/8	M8-MC-NPT2-	34.2	9.7	16.2	4.8	16	15
8	1/4	M8-MC-NPT4-	38.7	14.2	16.2	6.4	16	15
8	3/8	M8-MC-NPT6-	39.3	14.2	16.2	6.4	16	18
8	1/2	M8-MC-NPT8-	45.6	19.1	16.2	6.4	16	22
10	1/8	M10-MC-NPT2-	36.3	9.7	17.2	4.8	19	18
10	1/4	M10-MC-NPT4-	40.9	14.2	17.2	7.1	19	18
10	3/8	M10-MC-NPT6-	40.9	14.2	17.2	7.9	19	18
10	1/2	M10-MC-NPT8-	46.5	19.1	17.2	7.9	19	22
10	3/4	M10-MC-NPT12-	48.0	19.1	17.2	7.9	19	27
10	1	M10-MC-NPT16-	54.6	23.9	17.2	7.9	19	35
12	1/8	M12-MC-NPT2-	38.8	9.7	22.8	4.8	22	22
12	1/4	M12-MC-NPT4-	43.4	14.2	22.8	7.1	22	22
12	3/8	M12-MC-NPT6-	43.4	14.2	22.8	9.5	22	22
12	1/2	M12-MC-NPT8-	49.0	19.1	22.8	9.5	22	22
12	3/4	M12-MC-NPT12-	50.5	19.1	22.8	9.5	22	27
14	1/8	M14-MC-NPT2-	38.8	9.7	24.4	4.8	25	24
14	1/4	M14-MC-NPT4-	44.1	14.2	24.4	7.1	25	24
14	3/8	M14-MC-NPT6-	44.1	14.2	24.4	9.5	25	24
14	1/2	M14-MC-NPT8-	49.0	19.1	24.4	11.1	25	24
14	3/4	M14-MC-NPT12-	50.5	19.1	24.4	11.1	25	27
15	1/2	M15-MC-NPT8-	49.0	19.1	24.4	11.9	25	24
15	3/4	M15-MC-NPT12-	50.5	19.1	24.4	11.9	25	27
15	1	M15-MC-NPT16-	57.1	23.9	24.4	11.9	25	35
16	1/4	M16-MC-NPT4-	44.1	14.2	24.4	7.1	25	24
16	3/8	M16-MC-NPT6-	44.1	14.2	24.4	9.5	25	24
16	1/2	M16-MC-NPT8-	49.0	19.1	24.4	11.9	25	24
16	3/4	M16-MC-NPT12-	50.5	19.1	24.4	12.7	25	27
18	3/8	M18-MC-NPT6-	45.6	14.2	24.4	9.5	30	27
18	1/2	M18-MC-NPT8-	50.5	19.1	24.4	11.9	30	27
18	3/4	M18-MC-NPT12-	50.5	19.1	24.4	15.1	30	27
20	1/2	M20-MC-NPT8-	52.3	19.1	26.0	11.9	32	30
20	3/4	M20-MC-NPT12-	52.3	19.1	26.0	15.9	32	30
20	1	M20-MC-NPT16-	57.1	23.9	26.0	15.9	32	35
22	1/2	M22-MC-NPT8-	52.3	19.1	26.0	11.9	32	30
22	3/4	M22-MC-NPT12-	52.3	19.1	26.0	15.9	32	30
22	1	M22-MC-NPT16-	57.1	23.9	26.0	18.3	32	35
25	1/2	M25-MC-NPT8-	57.5	19.1	31.3	11.9	38	35
25	3/4	M25-MC-NPT12-	57.5	19.1	31.3	15.9	38	35
25	1	M25-MC-NPT16-	62.3	23.9	31.3	21.8	38	35
28	1	M28-MC-NPT16-	72.4	23.9	36.6	21.8	46	41
28	1 1/4	M28-MC-NPT20-	73.1	23.9	36.6	21.8	46	46
30	1 1/4	M30-MC-NPT20-	77.2	23.9	39.6	26.2	50	46
32	1 1/4	M32-MC-NPT20-	79.6	23.9	42.0	28.6	50	46
38	1 1/2	M38-MC-NPT24-	91.6	26.2	49.4	33.7	60	55

Male Connectors




Metric Tube

ISO Tapered Thread (BSPT)

T-Tube O.D. (mm)	P-BSPT Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
2	1/8	M2-MC-MBT2-	30.5	9.7	12.9	1.7	12	12
3	1/8	M3-MC-MBT2-	30.5	9.7	12.9	2.4	12	12
3	1/4	M3-MC-MBT4-	35.6	14.2	12.9	2.4	12	14
4	1/8	M4-MC-MBT2-	31.2	9.7	13.7	2.4	12	12
4	1/4	M4-MC-MBT4-	36.3	14.2	13.7	2.4	12	14
6	1/8	M6-MC-MBT2-	32.8	9.7	15.3	4.8	14	14
6	1/4	M6-MC-MBT4-	37.9	14.2	15.3	4.8	14	14
6	3/8	M6-MC-MBT6-	38.4	14.2	15.3	4.8	14	18
6	1/2	M6-MC-MBT8-	44.7	19.1	15.3	4.8	14	22
8	1/8	M8-MC-MBT2-	34.2	9.7	16.2	4.8	16	15
8	1/4	M8-MC-MBT4-	38.7	14.2	16.2	6.4	16	15
8	3/8	M8-MC-MBT6-	39.2	14.2	16.2	6.4	16	18
8	1/2	M8-MC-MBT8-	45.6	19.1	16.2	6.4	16	22
10	1/8	M10-MC-MBT2-	36.3	9.7	17.2	4.8	19	18
10	1/4	M10-MC-MBT4-	40.9	14.2	17.2	7.1	19	18
10	3/8	M10-MC-MBT6-	40.9	14.2	17.2	7.9	19	18
10	1/2	M10-MC-MBT8-	46.5	19.1	17.2	7.9	19	22
10	3/4	M10-MC-MBT12-	48.0	19.1	17.2	7.9	19	27
12	1/8	M12-MC-MBT2-	38.3	9.7	22.8	4.8	22	22
12	1/4	M12-MC-MBT4-	43.4	14.2	22.8	7.1	22	22
12	3/8	M12-MC-MBT6-	43.4	14.2	22.8	9.5	22	22
12	1/2	M12-MC-MBT8-	49.0	19.1	22.8	9.5	22	22
12	3/4	M12-MC-MBT12-	50.5	19.1	22.8	9.5	22	27
14	1/8	M14-MC-MBT2-	38.8	9.7	24.4	4.8	25	24
14	1/4	M14-MC-MBT4-	44.1	14.2	24.4	7.1	25	24
14	3/8	M14-MC-MBT6-	44.1	14.2	24.4	7.9	25	24
14	1/2	M14-MC-MBT8-	49.0	19.1	24.4	11.1	25	24
14	3/4	M14-MC-MBT12-	50.5	19.1	24.4	11.1	25	27
15	1/2	M15-MC-MBT8-	49.0	19.1	24.4	11.9	25	24
16	1/4	M16-MC-MBT4-	44.1	14.2	24.4	7.1	25	24
16	3/8	M16-MC-MBT6-	44.1	14.2	24.4	9.5	25	24
16	1/2	M16-MC-MBT8-	49.0	19.1	24.4	11.9	25	24
16	3/4	M16-MC-MBT12-	50.5	19.1	24.4	12.7	25	27
18	1/2	M18-MC-MBT8-	50.5	19.1	24.4	11.9	30	27
18	3/4	M18-MC-MBT12-	50.5	19.1	24.4	15.1	30	27
20	1/2	M20-MC-MBT8-	52.3	19.1	26.0	11.9	32	30
20	3/4	M20-MC-MBT12-	52.3	19.1	26.0	15.9	32	30
22	3/4	M22-MC-MBT12-	52.3	19.1	26.0	15.9	32	30
22	1	M22-MC-MBT16-	57.1	23.9	26.0	18.3	32	35
25	1/2	M25-MC-MBT8-	57.5	19.1	31.3	11.9	38	35
25	3/4	M25-MC-MBT12-	57.5	19.1	31.3	15.9	38	35
25	1	M25-MC-MBT16-	62.3	23.9	31.3	21.8	38	35
28	1	M28-MC-MBT16-	72.4	23.9	36.6	21.8	46	41
28	1 1/4	M28-MC-MBT20-	73.1	23.9	36.6	21.8	46	46
30	1 1/4	M30-MC-MBT20-	77.2	23.9	39.6	26.2	50	46
32	1 1/4	M32-MC-MBT20-	79.6	23.9	42.0	28.6	50	46
38	1 1/2	M38-MC-MBT24-	91.6	26.2	49.4	33.7	60	55

Male Connectors

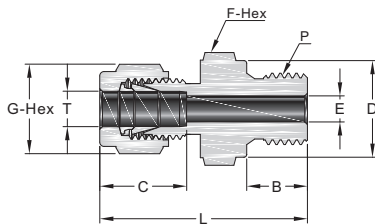


Metric Tube

ISO Parallel Thread (BS)

T-Tube O.D. (mm)	P-BS Size	Basic Ordering Number	Dimension, mm						
			L	B	C	E	G	F	D
2	1/8	M2-MC-MBS2-	30.0	7.1	12.9	1.7	12	14	13.7
3	1/8	M3-MC-MBS2-	30.0	7.1	12.9	2.4	12	14	13.7
3	1/4	M3-MC-MBS4-	35.3	11.2	12.9	2.4	12	19	18.0
4	1/8	M4-MC-MBS2-	30.7	7.1	13.7	2.4	12	14	13.7
4	1/4	M4-MC-MBS4-	36.0	11.2	13.7	2.4	12	19	18.0
6	1/8	M6-MC-MBS2-	32.3	7.1	15.3	4.0	14	14	13.7
6	1/4	M6-MC-MBS4-	37.6	11.2	15.3	4.8	14	19	18.0
6	3/8	M6-MC-MBS6-	38.9	11.2	15.3	4.8	14	22	21.6
6	1/2	M6-MC-MBS8-	44.7	14.2	15.3	4.8	14	27	25.9
8	1/8	M8-MC-MBS2-	33.2	7.1	16.2	4.0	16	15	14.5
8	1/4	M8-MC-MBS4-	38.5	11.2	16.2	6.4	16	19	18.0
8	3/8	M8-MC-MBS6-	39.8	11.2	16.2	6.4	16	22	21.6
8	1/2	M8-MC-MBS8-	45.6	14.2	16.2	6.4	16	27	25.9
8	3/4	M8-MC-MBS12-	49.5	15.7	16.2	6.4	16	35	32.0
10	1/4	M10-MC-MBS4-	39.4	11.2	17.2	5.9	19	19	18.0
10	3/8	M10-MC-MBS6-	40.6	11.2	17.2	7.9	19	22	21.6
10	1/2	M10-MC-MBS8-	46.5	14.2	17.2	7.9	19	27	25.9
12	1/4	M12-MC-MBS4-	42.6	11.2	22.8	5.9	22	22	21.6
12	3/8	M12-MC-MBS6-	43.1	11.2	22.8	7.9	22	22	21.6
12	1/2	M12-MC-MBS8-	49.0	14.2	22.8	9.5	22	27	25.9
12	3/4	M12-MC-MBS12-	52.8	15.7	22.8	9.5	22	35	32.0
14	1/4	M14-MC-MBS4-	42.9	11.2	24.4	7.1	25	24	18.0
14	3/8	M14-MC-MBS6-	43.9	11.2	24.4	7.9	25	24	21.6
14	1/2	M14-MC-MBS8-	49.0	14.2	24.4	11.1	25	27	25.9
14	3/4	M14-MC-MBS12-	52.8	15.7	24.4	11.1	25	35	32.0
15	3/8	M15-MC-MBS6-	43.9	11.2	24.4	7.9	25	24	21.6
15	1/2	M15-MC-MBS8-	49.0	14.2	24.4	11.9	25	27	25.9
15	3/4	M15-MC-MBS12-	52.8	15.7	24.4	11.9	25	35	32.0
16	3/8	M16-MC-MBS6-	43.9	11.2	24.4	7.9	25	24	21.6
16	1/2	M16-MC-MBS8-	49.0	14.2	24.4	11.9	25	27	25.9
16	3/4	M16-MC-MBS12-	52.8	15.7	24.4	12.7	25	35	32.0
18	1/2	M18-MC-MBS8-	49.0	14.2	24.4	11.9	30	27	25.9
18	3/4	M18-MC-MBS12-	52.8	15.7	24.4	15.1	30	35	32.0
20	1/2	M20-MC-MBS8-	50.5	14.2	26.0	11.9	32	30	25.9
20	3/4	M20-MC-MBS12-	52.8	15.7	26.0	15.9	32	35	32.0
22	3/4	M22-MC-MBS12-	52.8	15.7	26.0	15.9	32	35	32.0
22	1	M22-MC-MBS16-	55.3	18.3	26.0	18.3	32	41	39.1
25	3/4	M25-MC-MBS12-	57.5	15.7	31.3	15.9	38	35	32.0
25	1	M25-MC-MBS16-	60.1	18.3	31.3	19.8	38	41	39.1
28	1	M28-MC-MBS16-	70.1	18.3	36.6	19.8	46	41	39.1
28	1 1/4	M28-MC-MBS20-	73.9	19.8	36.6	21.8	46	50	49.0
30	1 1/4	M30-MC-MBS20-	76.5	19.8	39.6	25.0	50	50	49.0
32	1 1/4	M32-MC-MBS20-	78.9	19.8	42.0	25.0	50	50	49.0
38	1 1/2	M38-MC-MBS24-	90.8	22.1	49.4	31.8	60	55	54.7


Male Connectors

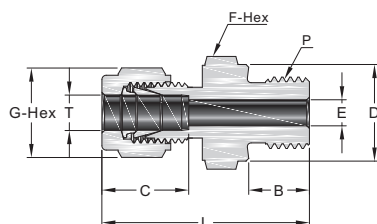

Metric Tube

ISO Parallel Thread (BP)

T-Tube O.D. (mm)	P-BP Size	Basic Ordering Number	Dimension, mm						
			L	B	C	E	G	F	D
3	1/8	M3-MC-PMBP2-	30.0	7.1	12.9	2.4	12	14	13.8
3	1/4	M3-MC-PMBP4-	35.3	11.2	12.9	2.4	12	19	18.0
4	1/8	M4-MC-PMBP2-	30.7	7.1	13.7	2.4	12	14	13.8
6	1/8	M6-MC-PMBP2-	32.3	7.1	15.3	4.0	14	14	13.8
6	1/4	M6-MC-PMBP4-	37.6	11.2	15.3	4.8	14	19	18.0
6	3/8	M6-MC-PMBP6-	38.9	11.2	15.3	4.8	14	22	21.8
6	1/2	M6-MC-PMBP8-	44.7	14.2	15.3	4.8	14	27	26.0
8	1/8	M8-MC-PMBP2-	33.3	7.1	16.2	4.0	16	15	13.8
8	1/4	M8-MC-PMBP4-	38.5	11.2	16.2	5.9	16	19	18.0
8	3/8	M8-MC-PMBP6-	39.8	11.2	16.2	6.4	16	22	21.8
8	1/2	M8-MC-PMBP8-	45.6	14.2	16.2	6.4	16	27	26.0
10	1/4	M10-MC-PMBP4-	39.4	11.2	17.2	5.9	19	19	18.0
10	3/8	M10-MC-PMBP6-	40.6	11.2	17.2	7.9	19	22	21.8
10	1/2	M10-MC-PMBP8-	46.5	14.2	17.2	7.9	19	27	26.0
12	1/4	M12-MC-PMBP4-	42.6	11.2	22.8	5.9	22	22	18.0
12	3/8	M12-MC-PMBP6-	43.1	11.2	22.8	7.9	22	22	21.8
12	1/2	M12-MC-PMBP8-	49.0	14.2	22.8	9.5	22	27	26.0
12	3/4	M12-MC-PMBP12-	52.8	15.7	22.8	9.5	22	35	32.0
15	1/2	M15-MC-PMBP8-	49.0	14.2	24.4	11.9	25	27	26.0
16	3/8	M16-MC-PMBP6-	43.9	11.2	24.4	7.9	25	24	21.8
16	1/2	M16-MC-PMBP8-	49.0	14.2	24.4	11.9	25	27	26.0
18	1/2	M18-MC-PMBP8-	49.0	14.2	24.4	11.9	30	27	26.0
18	3/4	M18-MC-PMBP12-	52.8	15.7	24.4	15.1	30	35	32.0
20	1/2	M20-MC-PMBP8-	50.5	14.2	26.0	11.9	32	30	26.0
20	3/4	M20-MC-PMBP12-	52.8	15.7	26.0	15.9	32	35	32.0
22	3/4	M22-MC-PMBP12-	52.8	15.7	26.0	15.9	32	35	32.0
22	1	M22-MC-PMBP16-	55.3	18.3	26.0	18.3	32	41	39.0
25	3/4	M25-MC-PMBP12-	57.5	15.7	31.3	15.9	38	35	32.0
25	1	M25-MC-PMBP16-	60.1	18.3	31.3	19.8	38	41	39.0
28	1	M28-MC-PMBP16-	70.1	18.3	36.6	19.8	46	41	39.0
28	1 1/4	M28-MC-PMBP20-	73.9	19.8	36.6	21.8	46	50	49.0
30	1 1/4	M30-MC-PMBP20-	76.5	19.8	39.6	26.2	50	50	49.0
32	1 1/4	M32-MC-PMBP20-	78.9	19.8	42.0	28.6	50	50	49.0
38	1 1/2	M38-MC-PMBP24-	89.3	20.6	49.4	31.8	60	55	54.7




Metric Tube

ISO Parallel Thread (BG)

T-Tube O.D. (mm)	P-BG Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
6	1/4	M6-MC-MBP4-	36.9	12.9	15.3	4.8	14	14
6	3/8	M6-MC-MBP6-	39.5	14.2	15.3	4.8	14	18
8	1/8	M8-MC-MBP2-	33.9	9.8	16.2	4.0	16	14
8	1/4	M8-MC-MBP4-	37.0	12.9	16.2	6.4	16	14
8	3/8	M8-MC-MBP6-	39.3	14.2	16.2	6.4	16	18
8	1/2	M8-MC-MBP8-	45.4	18.8	16.2	6.4	16	22
10	1/4	M10-MC-MBP4-	39.5	12.9	17.2	5.9	19	18
10	1/2	M10-MC-MBP8-	46.3	18.8	17.2	7.9	19	22
12	3/8	M12-MC-MBP6-	44.2	14.2	22.8	7.9	22	22
12	1/2	M12-MC-MBP8-	49.0	18.8	22.8	9.5	22	22
14	1/4	M14-MC-MBP4-	42.9	12.9	24.4	5.9	25	24
16	3/8	M16-MC-MBP6-	43.4	14.2	24.4	7.9	25	24
16	1/2	M16-MC-MBP8-	47.9	18.8	24.4	9.5	25	24
18	1/2	M18-MC-MBP8-	49.8	18.8	24.4	9.5	30	27

Male Connectors




Adapt to straight thread boss of SAE J1926-1, ISO 11926-1 and MS 16142.

Metric Tube

SAE/MS Straight Thread


T-Tube O.D. (mm)	P-SAE/MS Thread Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
6	9/16-18	M6-MC-OST9-	35.6	9.9	15.3	4.8	14	18
10	9/16-18	M10-MC-OST9-	37.3	9.9	17.2	7.1	19	22
10	3/4-16	M10-MC-OST12-	39.4	11.2	17.2	7.9	19	22
12	7/16-20	M12-MC-OST7-	40.6	9.1	22.8	5.2	22	22
12	9/16-18	M12-MC-OST9-	39.9	9.9	22.8	7.1	22	22

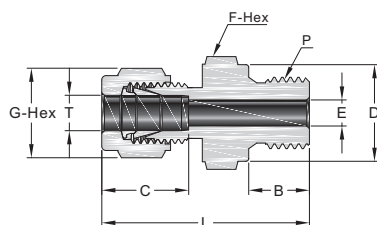

Metric Tube

Metric Thread (BSMS)

T-Tube O.D. (mm)	P-Metric Thread Size	Basic Ordering Number	Dimension, mm						
			L	B	C	E	G	F	D
6	M8 x 1	M6-MC-BSMS8-	33.3	8	15.3	3.0	14	14	12
6	M10 x 1	M6-MC-BSMS10-	36.3	8	15.3	4.0	14	14	14
6	M12 x 1.5	M6-MC-BSMS12-	38.2	12	15.3	4.8	14	18	17
6	M14 x 1.5	M6-MC-BSMS14-	39.7	12	15.3	4.8	14	19	19
8	M8 x 1	M8-MC-BSMS8-	34.1	8	16.2	3.0	16	14	12
8	M10 x 1	M8-MC-BSMS10-	34.1	8	16.2	5.0	16	15	14
8	M12 x 1.5	M8-MC-BSMS12-	40.4	12	16.2	6.0	16	18	17
8	M14 x 1.5	M8-MC-BSMS14-	40.4	12	16.2	6.4	16	19	19
10	M12 x 1.5	M10-MC-BSMS12-	40.7	12	17.2	6.0	19	18	17
10	M14 x 1.5	M10-MC-BSMS14-	41.5	12	17.2	7.9	19	19	19
12	M16 x 1.5	M12-MC-BSMS16-	45.5	12	22.8	9	22	22	21
12	M20 x 1.5	M12-MC-BSMS20-	48.0	14	22.8	9.5	22	25	25
12	M22 x 1.5	M12-MC-BSMS22-	49.5	14	22.8	9.5	22	27	27
14	M14 x 1.5	M14-MC-BSMS14-	44.9	12	24.4	8	25	24	19
14	M20 x 1.5	M14-MC-BSMS20-	48.0	14	24.4	11.1	25	25	25
16	M20 x 1.5	M16-MC-BSMS20-	48.0	14	24.4	12	25	25	25
18	M20 x 1.5	M18-MC-BSMS20-	48.5	14	24.4	12	30	27	25
20	M20 x 1.5	M20-MC-BSMS20-	50.0	14	26.0	12	32	30	25
22	M24 x 1.5	M22-MC-BSMS24-	50.5	14	26.0	15	32	30	29
25	M27 x 2	M25-MC-BSMS27-	57.5	16	31.3	16.8	38	35	32




Adapt to straight thread boss of ISO 6149-1.

Metric Tube

Metric Thread (OMS)

T-Tube O.D. (mm)	P-Metric Thread Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
6	M14 x 1.5	M6-MC-OMS14-	35.2	11	15.3	4.8	14	19
10	M14 x 1.5	M10-MC-OMS14-	36.7	11	17.2	7.5	19	19
10	M20 x 1.5	M10-MC-OMS20-	41.2	14	17.2	7.9	19	27
12	M14 x 1.5	M12-MC-OMS14-	40.2	11	22.8	7.5	22	22
12	M20 x 1.5	M12-MC-OMS20-	44.0	14	22.8	10.4	22	27

Male Connectors




Metric Tube

Metric Thread (MS)

T-Tube O.D. (mm)	P-Metric Thread Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
6	M6 x 1	M6-MC-MS6-	32.4	8	15.3	2.0	14	14
6	M8 x 1	M6-MC-MS8-	32.4	9	15.3	3.0	14	14
6	M10 x 1	M6-MC-MS10-	35.2	11	15.3	4.7	14	14
6	M12 x 1.5	M6-MC-MS12-	36.4	12	15.3	4.8	14	14
6	M14 x 1.5	M6-MC-MS14-	37.4	13	15.3	4.8	14	16
6	M16 x 1.5	M6-MC-MS16-	38.4	14	15.3	4.8	14	18
6	M18 x 1.5	M6-MC-MS18-	40.0	15	15.3	4.8	14	19
6	M20 x 1.5	M6-MC-MS20-	41.7	16	15.3	4.8	14	22
8	M8 x 1	M8-MC-MS8-	34.5	9	16.2	3.0	16	14
8	M10 x 1	M8-MC-MS10-	35.6	11	16.2	4.7	16	14
8	M12 x 1.5	M8-MC-MS12-	36.6	12	16.2	6.0	16	14
8	M14 x 1.5	M8-MC-MS14-	37.7	13	16.2	6.4	16	16
8	M20 x 1.5	M8-MC-MS20-	42.5	16	16.2	6.4	16	22
10	M12 x 1.5	M10-MC-MS12-	38.7	12	17.2	6.0	19	18
10	M14 x 1.5	M10-MC-MS14-	39.7	13	17.2	7.2	19	18
10	M20 x 1.5	M10-MC-MS20-	43.5	16	17.2	7.9	19	22
12	M12 x 1.5	M12-MC-MS12-	41.2	12	22.8	6.0	22	22
12	M16 x 1.5	M12-MC-MS16-	43.2	14	22.8	9.5	22	22
12	M18 x 1.5	M12-MC-MS18-	44.2	15	22.8	9.5	22	22
12	M20 x 1.5	M12-MC-MS20-	45.2	16	22.8	9.5	22	22
14	M14 x 1.5	M14-MC-MS14-	42.5	13	24.4	7.2	25	24
14	M16 x 1.5	M14-MC-MS16-	43.9	14	24.4	8.4	25	24
14	M20 x 1.5	M14-MC-MS20-	45.1	16	24.4	10.8	25	24
16	M20 x 1.5	M16-MC-MS20-	46.1	16	24.4	10.8	25	24
18	M20 x 1.5	M18-MC-MS20-	47.5	16	24.4	10.8	30	27
18	M22 x 1.5	M18-MC-MS22-	48.5	17	24.4	12	30	27
20	M20 x 1.5	M20-MC-MS20-	49.5	16	26.0	10.8	32	30
22	M24 x 1.5	M22-MC-MS24-	50.5	17	26.0	14.4	32	30
25	M27 x 2	M22-MC-MS27-	57.0	18	31.3	16.1	38	35

Bulkhead Male Connectors

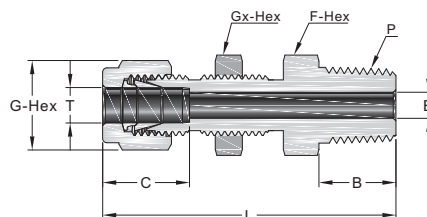

Fractional Tube

NPT Thread


T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, mm							Panel Hole Size (mm)	Max. Panel Thickness (mm)
			L	B	C	E	G	F	Gx		
1/16	1/16	F1-BMC-NPT1-	30.2	9.7	8.6	1.3	7.9	7.9	7.9	5.2	6.4
1/16	1/8	F1-BMC-NPT2-	32.3	9.7	8.6	1.3	7.9	11.1	7.9	5.2	6.4
1/8	1/8	F2-BMC-NPT2-	46.5	9.7	12.7	2.3	11.1	12.7	12.7	8.3	12.7
3/16	1/8	F3-BMC-NPT2-	48.0	9.7	13.7	3.0	12.7	14.3	14.3	9.9	12.7
1/4	1/8	F4-BMC-NPT2-	49.5	9.7	15.2	4.8	14.3	15.9	15.9	11.5	10.2
1/4	1/4	F4-BMC-NPT4-	54.1	14.2	15.2	4.8	14.3	15.9	15.9	11.5	10.2
1/4	3/8	F4-BMC-NPT6-	54.9	14.2	15.2	4.8	14.3	17.5	15.9	11.5	10.2
1/4	1/2	F4-BMC-NPT8-	60.3	19.1	15.2	4.8	14.3	22.2	15.9	11.5	10.2
5/16	1/8	F5-BMC-NPT2-	52.8	9.7	16.3	4.8	15.9	17.5	17.5	13.1	11.2
5/16	1/4	F5-BMC-NPT4-	57.7	14.2	16.3	6.4	15.9	17.5	17.5	13.1	11.2
3/8	1/8	F6-BMC-NPT2-	52.9	9.7	16.8	4.8	17.5	19.1	19.1	14.7	11.2
3/8	1/4	F6-BMC-NPT4-	57.4	14.2	16.8	7.1	17.5	19.1	19.1	14.7	11.2
3/8	3/8	F6-BMC-NPT6-	57.4	14.2	16.8	7.1	17.5	19.1	19.1	14.7	11.2
3/8	1/2	F6-BMC-NPT8-	63.8	19.1	16.8	7.1	17.5	22.2	19.1	14.7	11.2
1/2	1/8	F8-BMC-NPT2-	58.7	9.7	22.9	4.8	22.2	23.8	23.8	19.4	12.7
1/2	1/4	F8-BMC-NPT4-	63.2	14.2	22.9	7.1	22.2	23.8	23.8	19.4	12.7
1/2	3/8	F8-BMC-NPT6-	63.2	14.2	22.9	9.7	22.2	23.8	23.8	19.4	12.7
1/2	1/2	F8-BMC-NPT8-	68.8	19.1	22.9	10.4	22.2	23.8	23.8	19.4	12.7
5/8	3/8	F10-BMC-NPT6-	66.7	14.2	24.4	9.7	25.4	27.0	27.0	22.6	15.1
5/8	1/2	F10-BMC-NPT8-	71.5	19.1	24.4	11.9	25.4	27.0	27.0	22.6	15.1
3/4	1/2	F12-BMC-NPT8-	76.2	19.1	24.4	11.9	28.6	30.2	30.2	25.8	16.8
3/4	3/4	F12-BMC-NPT12-	76.2	19.1	24.4	15.7	28.6	30.2	30.2	25.8	16.8
7/8	3/4	F14-BMC-NPT12-	84.1	19.1	25.9	15.7	31.8	33.3	33.3	29.0	19.1
1	3/4	F16-BMC-NPT12-	88.4	19.1	31.2	15.7	38.1	41.3	41.3	33.7	19.1
1	1	F16-BMC-NPT16-	93.2	23.9	31.2	22.4	38.1	41.3	41.3	33.7	19.1

Metric Tube

NPT Thread

T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, mm							Panel Hole Size (mm)	Max. Panel Thickness (mm)
			L	B	C	E	G	F	Gx		
6	1/8	M6-BMC-NPT2-	49.6	9.7	15.3	4.8	14	16	16	11.5	10.2
6	1/4	M6-BMC-NPT4-	53.6	14.2	15.3	4.8	14	16	16	11.5	10.2
8	1/8	M8-BMC-NPT2-	52.3	9.7	16.2	4.8	16	18	18	13.1	11.2
8	1/4	M8-BMC-NPT4-	57.5	14.2	16.2	6.4	16	18	18	13.1	11.2
10	1/4	M10-BMC-NPT4-	58.4	14.2	17.2	7.9	19	22	22	16.3	11.2
10	3/8	M10-BMC-NPT6-	58.4	14.2	17.2	7.9	19	22	22	16.3	11.2
10	1/2	M10-BMC-NPT8-	63.1	19.1	17.2	7.9	19	22	22	16.3	11.2
12	1/4	M12-BMC-NPT4-	63.9	14.2	22.8	7.9	22	24	24	19.5	12.7
12	3/8	M12-BMC-NPT6-	63.9	14.2	22.8	9.5	22	24	24	19.5	12.7
12	1/2	M12-BMC-NPT8-	68.8	19.1	22.8	9.5	22	24	24	19.5	12.7

Bulkhead Male Connectors

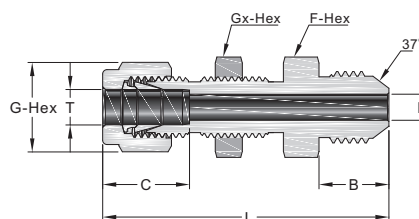


Fractional Tube

37° Flare (AN)

T-Tube O.D. (in.)	AN Tube Flare Size	Basic Ordering Number	Dimension, in. (mm)							Panel Hole Size in. (mm)	Max. Panel Thickness in. (mm)
			L	B	C	E	G	F	Gx		
1/8	1/8	F2-BMC-AN2-	1.91 (48.5)	0.45 (11.4)	0.50 (12.7)	0.06 (1.5)	0.44 (11.1)	0.50 (12.7)	0.50 (12.7)	0.33 (8.3)	0.50 (12.7)
1/8	1/4	F2-BMC-AN4-	2.04 (51.8)	0.55 (14.0)	0.50 (12.7)	0.09 (2.3)	0.44 (11.1)	0.63 (15.9)	0.50 (12.7)	0.33 (8.3)	0.51 (12.7)
3/16	3/16	F3-BMC-AN3-	1.98 (50.3)	0.48 (12.2)	0.54 (13.7)	0.09 (2.3)	0.50 (12.7)	0.56 (14.3)	0.56 (14.3)	0.39 (9.9)	0.50 (12.7)
1/4	1/4	F4-BMC-AN4-	2.12 (53.8)	0.55 (14.0)	0.60 (15.2)	0.17 (4.3)	0.56 (14.3)	0.63 (15.9)	0.63 (15.9)	0.45 (11.5)	0.40 (10.2)
5/16	5/16	F5-BMC-AN5-	2.21 (56.1)	0.55 (14.0)	0.64 (16.2)	0.23 (5.8)	0.63 (15.9)	0.69 (17.5)	0.69 (17.5)	0.52 (13.1)	0.56 (14.3)
3/8	1/4	F6-BMC-AN4-	2.25 (57.2)	0.55 (14.0)	0.66 (16.8)	0.17 (4.3)	0.69 (17.5)	0.75 (19.1)	0.75 (19.1)	0.58 (14.7)	0.44 (11.2)
3/8	3/8	F6-BMC-AN6-	2.25 (57.2)	0.56 (14.2)	0.66 (16.8)	0.28 (7.1)	0.69 (17.5)	0.75 (19.1)	0.75 (19.1)	0.58 (14.7)	0.44 (11.2)
1/2	1/2	F8-BMC-AN8-	2.59 (65.8)	0.66 (16.8)	0.90 (22.8)	0.39 (9.9)	0.87 (22.2)	0.94 (23.8)	0.94 (23.8)	0.76 (19.4)	0.50 (12.7)
5/8	5/8	F10-BMC-AN10-	2.74 (69.6)	0.76 (19.3)	0.96 (24.4)	0.48 (12.3)	1.00 (25.4)	1.06 (27.0)	1.06 (27.0)	0.89 (22.6)	0.59 (15.1)
3/4	3/4	F12-BMC-AN12-	3.11 (79.0)	0.86 (21.8)	0.96 (24.4)	0.61 (15.5)	1.13 (28.6)	1.19 (30.2)	1.19 (30.2)	1.02 (25.8)	0.66 (16.8)
1	1	F16-BMC-AN16-	3.64 (92.5)	0.91 (23.1)	1.23 (31.2)	0.84 (21.3)	1.50 (38.1)	1.63 (41.3)	1.63 (41.3)	1.33 (33.7)	0.75 (19.1)

Thermocouple Connectors




Fractional Tube

NPT Thread

T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, mm			
			L	B	G	F
1/16	1/16	F1-TC-NPT1-	23.9	9.7	7.9	7.9
1/16	1/8	F1-TC-NPT2-	26.2	9.7	7.9	11.1
1/16	1/4	F1-TC-NPT4-	31.0	14.2	7.9	14.3
1/8	1/16	F2-TC-NPT1-	29.7	9.7	11.1	11.1
1/8	1/8	F2-TC-NPT2-	30.5	9.7	11.1	11.1
1/8	1/4	F2-TC-NPT4-	35.6	14.2	11.1	14.3
3/16	1/8	F3-TC-NPT2-	31.2	9.7	12.7	11.1
3/16	1/4	F3-TC-NPT4-	36.3	14.2	12.7	14.3
1/4	1/8	F4-TC-NPT2-	32.8	9.7	14.3	12.7
1/4	1/4	F4-TC-NPT4-	37.8	14.2	14.3	14.3
1/4	3/8	F4-TC-NPT6-	38.4	14.2	14.3	17.5
1/4	1/2	F4-TC-NPT8-	44.7	19.1	14.3	22.2
5/16	1/4	F5-TC-NPT4-	38.6	14.2	15.9	14.3
3/8	1/4	F6-TC-NPT4-	39.9	14.2	17.5	15.9
3/8	3/8	F6-TC-NPT6-	39.9	14.2	17.5	17.5
3/8	1/2	F6-TC-NPT8-	46.2	19.1	17.5	22.2
3/8	3/4	F6-TC-NPT12-	47.8	19.1	17.5	27.0
1/2	1/2	F8-TC-NPT8-	49.0	19.1	22.2	22.2
1/2	3/4	F8-TC-NPT12-	50.5	19.1	22.2	27.0
5/8	3/4	F10-TC-NPT12-	50.5	19.1	25.4	27.0
3/4	3/4	F12-TC-NPT12-	50.5	19.1	28.6	27.0
1	1	F16-TC-NPT16-	62.2	23.9	38.1	34.9

Thermocouple Connectors




Metric Tube

NPT Thread

T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, mm			
			L	B	G	F
2	1/8	M2-TC-NPT2-	30.5	9.7	12	12
3	1/8	M3-TC-NPT2-	30.5	9.7	12	12
3	1/4	M3-TC-NPT4-	35.6	14.2	12	14
4	1/8	M4-TC-NPT2-	31.2	9.7	12	12
4	1/4	M4-TC-NPT4-	36.3	14.2	12	14
6	1/8	M6-TC-NPT2-	32.8	9.7	14	14
6	1/4	M6-TC-NPT4-	37.9	14.2	14	14
6	3/8	M6-TC-NPT6-	38.4	14.2	14	18
6	1/2	M6-TC-NPT8-	44.7	19.1	14	22
8	1/4	M8-TC-NPT4-	38.7	14.2	16	15
8	3/8	M8-TC-NPT6-	39.3	14.2	16	18
8	1/2	M8-TC-NPT8-	45.6	19.1	16	22
10	3/8	M10-TC-NPT6-	40.9	14.2	19	18
10	1/2	M10-TC-NPT8-	46.5	19.1	19	22
10	3/4	M10-TC-NPT12-	48.0	19.1	19	27
10	1	M10-TC-NPT16-	54.6	23.9	19	35
12	3/8	M12-TC-NPT6-	43.4	14.2	22	22
12	1/2	M12-TC-NPT8-	49.0	19.1	22	22
12	3/4	M12-TC-NPT12-	50.5	19.1	22	27
14	1/2	M14-TC-NPT8-	49.0	19.1	25	24
14	3/4	M14-TC-NPT12-	50.5	19.1	25	27
15	1/2	M15-TC-NPT8-	49.0	19.1	25	24
15	3/4	M15-TC-NPT12-	50.5	19.1	25	27
15	1	M15-TC-NPT16-	57.1	23.9	25	35
16	3/4	M16-TC-NPT12-	50.5	19.1	25	27
18	3/4	M18-TC-NPT12-	50.5	19.1	30	27
20	1	M20-TC-NPT16-	57.1	23.9	32	35
22	1	M22-TC-NPT16-	57.1	23.9	32	35
25	1	M25-TC-NPT16-	62.3	23.9	38	35

Female Connectors



Fractional Tube

NPT Thread


T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
1/16	1/16	F1-FC-FNPT1-	23.6	9.9	8.6	1.3	7.9	11.1
1/16	1/8	F1-FC-FNPT2-	24.4	10.4	8.6	1.3	7.9	14.3
1/8	1/8	F2-FC-FNPT2-	28.7	10.4	12.7	2.3	11.1	14.3
1/8	1/4	F2-FC-FNPT4-	33.5	15.0	12.7	2.3	11.1	19.1
3/16	1/8	F3-FC-FNPT2-	29.7	10.4	13.7	3.0	12.7	14.3
1/4	1/8	F4-FC-FNPT2-	31.2	10.4	15.2	4.8	14.3	14.3
1/4	1/4	F4-FC-FNPT4-	35.8	15.0	15.2	4.8	14.3	19.1
1/4	3/8	F4-FC-FNPT6-	37.6	15.0	15.2	4.8	14.3	22.2
1/4	1/2	F4-FC-FNPT8-	42.4	19.8	15.2	4.8	14.3	27.0
5/16	1/8	F5-FC-FNPT2-	32.0	10.4	16.3	6.4	15.9	14.3
5/16	1/4	F5-FC-FNPT4-	36.8	15.0	16.3	6.4	15.9	19.1
3/8	1/8	F6-FC-FNPT2-	32.8	10.4	16.8	7.1	17.5	15.9
3/8	1/4	F6-FC-FNPT4-	37.6	15.0	16.8	7.1	17.5	19.1
3/8	3/8	F6-FC-FNPT6-	39.1	15.0	16.8	7.1	17.5	22.2
3/8	1/2	F6-FC-FNPT8-	43.9	19.8	16.8	7.1	17.5	27.0
3/8	3/4	F6-FC-FNPT12-	47.8	20.6	16.8	7.1	17.5	33.3
1/2	1/4	F8-FC-FNPT4-	40.4	15.0	22.9	10.4	22.2	20.6
1/2	3/8	F8-FC-FNPT6-	41.9	15.0	22.9	10.4	22.2	22.2
1/2	1/2	F8-FC-FNPT8-	46.7	19.8	22.9	10.4	22.2	27.0
1/2	3/4	F8-FC-FNPT12-	48.3	20.6	22.9	10.4	22.2	33.3
5/8	3/8	F10-FC-FNPT6-	41.9	15.0	24.4	12.7	25.4	23.8
5/8	1/2	F10-FC-FNPT8-	46.7	19.8	24.4	12.7	25.4	27.0
3/4	1/2	F12-FC-FNPT8-	46.7	19.8	24.4	15.7	28.6	27.0
3/4	3/4	F12-FC-FNPT12-	48.3	20.6	24.4	15.7	28.6	33.3
7/8	3/4	F14-FC-FNPT12-	49.8	20.6	25.9	18.3	31.8	33.3
1	3/4	F16-FC-FNPT12-	53.3	20.6	31.2	22.4	38.1	34.9
1	1	F16-FC-FNPT16-	62.2	25.4	31.2	22.4	38.1	41.3
1 1/4	1 1/4	F20-FC-FNPT20-	74.7	25.4	41.1	27.7	47.6	54.0
1 1/2	1 1/2	F24-FC-FNPT24-	83.3	27.7	50.0	36.3	57.2	60.3

Fractional Tube

ISO Tapered Thread (BSPT)

T-Tube O.D. (in.)	P-BSPT Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
1/4	1/8	F4-FC-FBT2-	31.2	10.4	15.2	4.8	14.3	14.3
1/4	1/4	F4-FC-FBT4-	35.8	15.0	15.2	4.8	14.3	19.1
1/4	3/8	F4-FC-FBT6-	37.6	15.0	15.2	4.8	14.3	22.2
1/4	1/2	F4-FC-FBT8-	42.4	19.8	15.2	4.8	14.3	27.0
3/8	1/4	F6-FC-FBT4-	37.6	15.0	16.8	7.1	17.5	19.1
3/8	3/8	F6-FC-FBT6-	39.1	15.0	16.8	7.1	17.5	22.2
3/8	1/2	F6-FC-FBT8-	43.9	19.8	16.8	7.1	17.5	27.0
1/2	1/4	F8-FC-FBT4-	40.4	15.0	22.9	10.4	22.2	20.6
1/2	3/8	F8-FC-FBT6-	41.9	15.0	22.9	10.4	22.2	22.2
1/2	1/2	F8-FC-FBT8-	46.7	19.8	22.9	10.4	22.2	27.0


Female Connectors



Fractional Tube

ISO Parallel Thread (BG)

T-Tube O.D. (in.)	P-BG Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
1/8	1/4	F2-FC-FBP4-	35.3	12.9	12.7	2.3	11.1	19.1
1/8	3/8	F2-FC-FBP6-	38.7	14.2	12.7	2.3	11.1	23.8
1/4	1/4	F4-FC-FBP4-	37.6	12.9	15.2	4.8	14.3	19.1
1/4	3/8	F4-FC-FBP6-	37.6	14.2	15.2	4.8	14.3	23.8
1/4	1/2	F4-FC-FBP8-	43.4	18.8	15.2	4.8	14.3	27.0
5/16	1/4	F5-FC-FBP4-	38.4	12.9	16.3	5.6	15.9	19.1
5/16	3/8	F5-FC-FBP6-	39.2	14.2	16.3	6.4	15.9	23.8
5/16	1/2	F5-FC-FBP8-	40.9	18.8	16.3	7.1	15.9	27.0
3/8	1/4	F6-FC-FBP4-	39.1	12.9	16.8	5.6	17.5	19.1
3/8	3/8	F6-FC-FBP6-	38.6	14.2	16.8	6.4	17.5	23.8
3/8	1/2	F6-FC-FBP8-	41.9	18.8	16.8	7.1	17.5	27.0
1/2	1/4	F8-FC-FBP4-	41.9	12.9	22.9	5.6	22.2	22.2
1/2	3/8	F8-FC-FBP6-	44.5	14.2	22.9	6.4	22.2	23.8
1/2	1/2	F8-FC-FBP8-	48.3	18.8	22.9	7.1	22.2	27.0




Fractional Tube

Metric Thread

T-Tube O.D. (in.)	P-Metric Thread Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
1/8	M14 x 1.5	F2-FC-FMS14-	32.3	13	12.7	2.3	11.1	19.1
1/8	M16 x 1.5	F2-FC-FMS16-	33.3	14	12.7	2.3	11.1	22.2
1/8	M18 x 1.5	F2-FC-FMS18-	34.3	15	12.7	2.3	11.1	25.4
1/8	M20 x 1.5	F2-FC-FMS20-	35.3	16	12.7	2.3	11.1	27.0
1/4	M16 x 1.5	F4-FC-FMS16-	35.8	14	15.2	4.8	14.3	22.2
1/4	M18 x 1.5	F4-FC-FMS18-	36.8	15	15.2	4.8	14.3	25.4
1/4	M20 x 1.5	F4-FC-FMS20-	37.8	16	15.2	4.8	14.3	27.0
3/8	M14 x 1.5	F6-FC-FMS14-	37.1	13	16.8	7.1	17.5	19.1
3/8	M16 x 1.5	F6-FC-FMS16-	37.5	14	16.8	7.1	17.5	22.2
3/8	M18 x 1.5	F6-FC-FMS18-	38.5	15	16.8	7.1	17.5	25.4
3/8	M20 x 1.5	F6-FC-FMS20-	39.5	16	16.8	7.1	17.5	27.0
1/2	M16 x 1.5	F8-FC-FMS16-	41.4	14	22.9	8.4	22.2	22.2
1/2	M18 x 1.5	F8-FC-FMS18-	42.4	15	22.9	9.6	22.2	25.4
1/2	M20 x 1.5	F8-FC-FMS20-	43.4	16	22.9	10.4	22.2	27.0
1/2	M22 x 1.5	F8-FC-FMS22-	44.4	17	22.9	10.4	22.2	27.0

Female Connectors




Metric Tube

NPT Thread

T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
3	1/8	M3-FC-FNPT2-	28.7	10.4	12.9	2.4	12	14
3	1/4	M3-FC-FNPT4-	33.5	15.0	12.9	2.4	12	19
4	1/8	M4-FC-FNPT2-	29.7	10.4	13.7	2.4	12	14
6	1/8	M6-FC-FNPT2-	31.3	10.4	15.3	4.8	14	14
6	1/4	M6-FC-FNPT4-	35.8	15.0	15.3	4.8	14	19
6	3/8	M6-FC-FNPT6-	37.7	15.0	15.3	4.8	14	22
6	1/2	M6-FC-FNPT8-	42.5	19.8	15.3	4.8	14	27
8	1/8	M8-FC-FNPT2-	32.1	10.4	16.2	4.8	16	15
8	1/4	M8-FC-FNPT4-	37.0	15.0	16.2	6.4	16	19
8	3/8	M8-FC-FNPT6-	38.5	15.0	16.2	6.4	16	22
8	1/2	M8-FC-FNPT8-	43.3	19.8	16.2	6.4	16	27
10	1/8	M10-FC-FNPT2-	33.0	10.4	17.2	4.8	19	15
10	1/4	M10-FC-FNPT4-	37.8	15.0	17.2	7.9	19	19
10	3/8	M10-FC-FNPT6-	39.4	15.0	17.2	7.9	19	22
10	1/2	M10-FC-FNPT8-	44.2	19.8	17.2	7.9	19	27
12	1/4	M12-FC-FNPT4-	40.3	15.0	22.8	7.9	22	22
12	3/8	M12-FC-FNPT6-	41.9	15.0	22.8	9.5	22	22
12	1/2	M12-FC-FNPT8-	46.7	19.8	22.8	9.5	22	27
12	3/4	M12-FC-FNPT12-	49.7	20.6	22.8	9.5	22	35
14	3/4	M14-FC-FNPT12-	49.7	20.6	24.4	11.1	25	35
15	1/2	M15-FC-FNPT8-	46.7	19.8	24.4	11.9	25	27
16	3/8	M16-FC-FNPT6-	41.9	15.0	24.4	9.5	25	27
16	1/2	M16-FC-FNPT8-	46.9	19.8	24.4	11.9	25	27
20	1/2	M20-FC-FNPT8-	47.9	19.8	26.0	11.9	32	30
20	3/4	M20-FC-FNPT12-	49.7	20.6	26.0	15.9	32	35
22	3/4	M22-FC-FNPT12-	49.7	20.6	26.0	15.9	32	35
22	1	M22-FC-FNPT16-	57.9	25.4	26.0	18.3	32	41
25	3/4	M25-FC-FNPT12-	53.4	20.6	31.3	15.9	38	35
25	1	M25-FC-FNPT16-	62.3	25.4	31.3	21.8	38	41

Female Connectors




Metric Tube

ISO Tapered Thread (BSPT)

T-Tube O.D. (mm)	P-BSPT Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
3	1/8	M3-FC-FBT2-	28.7	10.4	12.9	2.4	12	14
6	1/8	M6-FC-FBT2-	31.3	10.4	15.3	4.8	14	14
6	1/4	M6-FC-FBT4-	35.8	15.0	15.3	4.8	14	19
6	3/8	M6-FC-FBT6-	36.9	15.0	15.3	4.8	14	22
6	1/2	M6-FC-FBT8-	42.5	19.8	15.3	4.8	14	27
8	1/8	M8-FC-FBT2-	32.1	10.4	16.2	6.4	16	15
8	1/4	M8-FC-FBT4-	37.0	15.0	16.2	6.4	16	19
8	3/8	M8-FC-FBT6-	38.5	15.0	16.2	6.4	16	22
8	1/2	M8-FC-FBT8-	43.3	19.8	16.2	6.4	16	27
10	1/8	M10-FC-FBT2-	33.0	10.4	17.2	7.9	19	18
10	1/4	M10-FC-FBT4-	37.8	15.0	17.2	7.9	19	19
10	3/8	M10-FC-FBT6-	39.4	15.0	17.2	7.9	19	22
10	1/2	M10-FC-FBT8-	44.2	19.8	17.2	7.9	19	27
12	1/8	M12-FC-FBT2-	35.5	10.4	22.8	8.3	22	22
12	1/4	M12-FC-FBT4-	40.3	15.0	22.8	9.5	22	22
12	3/8	M12-FC-FBT6-	41.9	15.0	22.8	9.5	22	22
12	1/2	M12-FC-FBT8-	46.7	19.8	22.8	9.5	22	27
12	3/4	M12-FC-FBT12-	49.0	20.6	22.8	9.5	22	35
15	1/2	M15-FC-FBT8-	46.7	19.8	24.4	11.9	25	27
16	1/2	M16-FC-FBT8-	48.4	19.8	24.4	11.9	25	27
16	3/4	M16-FC-FBT12-	49.7	20.6	24.4	12.7	25	35
20	1/2	M20-FC-FBT8-	47.9	19.8	26.0	11.9	32	30
20	3/4	M20-FC-FBT12-	49.7	20.6	26.0	15.9	32	35
22	3/4	M22-FC-FBT12-	49.7	20.6	26.0	15.9	32	35
22	1	M22-FC-FBT16-	57.9	25.4	26.0	18.3	32	41
25	3/4	M25-FC-FBT12-	53.4	20.6	31.3	15.9	38	35
25	1	M25-FC-FBT16-	62.3	25.4	31.3	21.8	38	41


Female Connectors



Metric Tube

ISO Parallel Thread (BG)

T-Tube O.D. (mm)	P-BG Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
3	1/4	M3-FC-FBP4-	35.3	12.9	12.9	2.4	12	19
6	1/4	M6-FC-FBP4-	37.6	12.9	15.3	4.8	14	19
6	3/8	M6-FC-FBP6-	37.6	14.2	15.3	4.8	14	24
6	1/2	M6-FC-FBP8-	43.5	18.8	15.3	4.8	14	27
8	1/4	M8-FC-FBP4-	38.5	12.9	16.2	6.4	16	19
8	3/8	M8-FC-FBP6-	36.2	14.2	16.2	6.4	16	24
8	1/2	M8-FC-FBP8-	41.0	18.8	16.2	6.4	16	27
10	1/4	M10-FC-FBP4-	39.4	12.9	17.2	5.9	19	19
10	3/8	M10-FC-FBP6-	38.8	14.2	17.2	7.9	19	24
10	1/2	M10-FC-FBP8-	42.1	18.8	17.2	7.9	19	27
12	1/4	M12-FC-FBP4-	41.9	12.9	22.8	5.9	22	22
12	3/8	M12-FC-FBP6-	44.4	14.2	22.8	7.9	22	24
12	1/2	M12-FC-FBP8-	48.2	18.8	22.8	9.5	22	27
20	1/2	M20-FC-FBP8-	54.3	18.8	26.0	11.9	32	30
22	1/2	M22-FC-FBP8-	54.3	18.8	26.0	11.9	32	30




Metric Tube

Metric Thread

T-Tube O.D. (mm)	P-Metric Thread Size	Basic Ordering Number	Dimension, mm					
			L	B	C	E	G	F
6	M10 x 1	M6-FC-FMS10-	32.7	11	15.3	4.0	14	16
6	M14 x 1.5	M6-FC-FMS14-	34.7	13	15.3	4.8	14	19
6	M20 x 1.5	M6-FC-FMS20-	37.7	16	15.3	4.8	14	27
8	M8 x 1	M8-FC-FMS8-	31.6	9	16.2	3.2	16	14
8	M10 x 1	M8-FC-FMS10-	33.6	11	16.2	4.0	16	16
8	M14 x 1.5	M8-FC-FMS14-	35.6	13	16.2	6.0	16	19
8	M20 x 1.5	M8-FC-FMS20-	38.6	16	16.2	6.4	16	27
10	M16 x 1.5	M10-FC-FMS16-	38.1	14	17.2	7.9	19	22
12	M20 x 1.5	M12-FC-FMS20-	44.9	16	22.8	9.5	22	27
14	M10 x 1	M14-FC-FMS10-	42.5	11	24.4	4.0	25	24
14	M20 x 1.5	M14-FC-FMS20-	44.9	16	24.4	10.8	25	27
14	M22 x 1.5	M14-FC-FMS22-	45.9	17	24.4	11.1	25	27
16	M20 x 1.5	M16-FC-FMS20-	44.9	16	24.4	10.8	26	27
20	M20 x 1.5	M20-FC-FMS20-	46.5	16	26.0	10.8	32	30
25	M27 x 2	M25-FC-FMS27-	54.4	18	31.3	16.1	38	35

Bulkhead Female Connectors

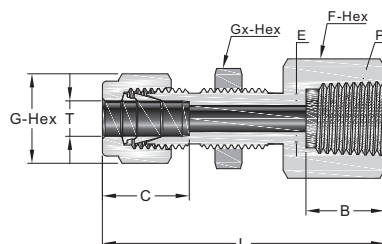

Fractional Tube

NPT Thread


T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, mm							Panel Hole Size (mm)	Max. Panel Thickness (mm)
			L	B	C	E	G	F	Gx		
1/16	1/16	F1-BFC-FNPT1-	26.2	9.9	8.6	1.3	7.9	11.1	7.9	5.2	3.2
1/16	1/8	F1-BFC-FNPT2-	26.9	10.4	8.6	1.3	7.9	14.3	7.9	5.2	3.2
1/8	1/8	F2-BFC-FNPT2-	44.7	10.4	12.7	2.3	11.1	14.3	12.7	8.3	12.7
1/8	1/4	F2-BFC-FNPT4-	49.6	15.0	12.7	2.3	11.1	19.1	12.7	8.3	12.7
3/16	1/8	F3-BFC-FNPT2-	45.5	10.4	13.7	3.0	12.7	14.3	14.3	9.9	12.7
1/4	1/8	F4-BFC-FNPT2-	47.0	10.4	15.2	4.8	14.3	15.9	15.9	11.5	10.2
1/4	1/4	F4-BFC-FNPT4-	51.8	15.0	15.2	4.8	14.3	19.1	15.9	11.5	10.2
1/4	3/8	F4-BFC-FNPT6-	53.3	15.0	15.2	4.8	14.3	22.2	15.9	11.5	10.2
1/4	1/2	F4-BFC-FNPT8-	58.2	19.8	15.2	4.8	14.3	27.0	15.9	11.5	10.2
5/16	1/8	F5-BFC-FNPT2-	49.8	10.4	16.3	6.4	15.9	14.3	17.5	13.1	11.2
5/16	1/4	F5-BFC-FNPT4-	60.5	15.0	16.3	6.4	15.9	19.1	17.5	13.1	11.2
3/8	1/8	F6-BFC-FNPT2-	50.3	10.4	16.8	7.1	17.5	15.9	19.1	14.5	11.2
3/8	1/4	F6-BFC-FNPT4-	55.1	15.0	16.8	7.1	17.5	19.1	19.1	14.5	11.2
3/8	3/8	F6-BFC-FNPT6-	56.6	15.0	16.8	7.1	17.5	22.2	19.1	14.5	11.2
3/8	1/2	F6-BFC-FNPT8-	61.5	19.8	16.8	7.1	17.5	27.0	19.1	14.5	11.2
3/8	3/4	F6-BFC-FNPT12-	65.3	20.6	16.8	7.1	17.5	33.3	19.1	14.5	11.2
1/2	1/4	F8-BFC-FNPT4-	60.2	15.0	22.9	10.4	22.2	23.8	23.8	19.4	12.7
1/2	3/8	F8-BFC-FNPT6-	61.7	15.0	22.9	10.4	22.2	23.8	23.8	19.4	12.7
1/2	1/2	F8-BFC-FNPT8-	66.5	19.8	22.9	10.4	22.2	27.0	23.8	19.4	12.7
1/2	3/4	F8-BFC-FNPT12-	68.1	20.6	22.9	10.4	22.2	33.3	23.8	19.4	12.7
5/8	3/8	F10-BFC-FNPT6-	62.5	15.0	24.4	12.7	25.4	23.8	27.0	22.6	15.1
5/8	1/2	F10-BFC-FNPT8-	67.3	19.8	24.4	12.7	25.4	27.0	27.0	22.6	15.1
3/4	1/2	F12-BFC-FNPT8-	72.2	19.8	24.4	15.7	28.6	27.0	30.2	25.8	19.8
3/4	3/4	F12-BFC-FNPT12-	73.7	20.6	24.4	15.7	28.6	33.3	30.2	25.8	19.8
7/8	3/4	F14-BFC-FNPT12-	80.8	20.6	25.9	18.3	31.8	33.3	33.3	29.0	23.8
1	3/4	F16-BFC-FNPT12-	84.7	20.6	31.2	22.4	38.1	41.3	41.3	33.7	23.8
1	1	F16-BFC-FNPT16-	93.5	25.4	31.2	22.4	38.1	41.3	41.3	33.7	23.8

Metric Tube

NPT Thread

T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, mm							Panel Hole Size (mm)	Max. Panel Thickness (mm)
			L	B	C	E	G	F	Gx		
6	1/8	M6-BFC-FNPT2-	47.2	10.4	15.3	4.8	14	16	16	11.5	10.2
6	1/4	M6-BFC-FNPT4-	51.8	15.0	15.3	4.8	14	19	16	11.5	10.2
8	1/8	M8-BFC-FNPT2-	49.6	10.4	16.2	4.8	16	18	18	13.1	11.2
10	1/4	M10-BFC-FNPT4-	55.2	15.0	17.2	7.9	19	22	22	16.3	11.2
12	3/8	M12-BFC-FNPT6-	60.9	15.0	22.8	9.5	22	24	24	19.5	12.7
12	1/2	M12-BFC-FNPT8-	66.5	19.8	22.8	9.5	22	27	24	19.5	12.7

Unions




Fractional Tube

T-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm				
		L	C	G	F	E
1/16	F1-U-F1-	25.1	8.6	7.9	11.1	1.3
1/8	F2-U-F2-	35.6	12.7	11.1	11.1	2.3
3/16	F3-U-F3-	37.3	13.7	12.7	12.7	3.0
1/4	F4-U-F4-	40.9	15.2	14.3	12.7	4.8
5/16	F5-U-F5-	42.9	16.2	15.9	14.3	6.4
3/8	F6-U-F6-	45.0	16.8	17.5	15.9	7.1
1/2	F8-U-F8-	51.3	22.9	22.2	20.6	10.4
5/8	F10-U-F10-	52.1	24.4	25.4	23.9	12.7
3/4	F12-U-F12-	53.6	24.4	28.6	27.0	15.7
7/8	F14-U-F14-	55.1	25.9	31.8	34.9	18.3
1	F16-U-F16-	64.8	31.2	38.1	34.9	22.4
1 1/8	F18-U-F18-	64.8	31.2	44.5	41.3	24.6
1 1/4	F20-U-F20-	92.2	41.1	47.6	44.5	27.7
1 1/2	F24-U-F24-	108	50.0	57.2	54.0	34.0

Metric Tube

T-Tube O.D. (mm)	Basic Ordering Number	Dimension, mm				
		L	C	G	F	E
2	M2-U-M2-	35.6	12.9	12	12	1.7
3	M3-U-M3-	35.3	12.9	12	12	2.4
4	M4-U-M4-	37.3	13.7	12	12	2.4
6	M6-U-M6-	41.0	15.3	14	14	4.8
8	M8-U-M8-	43.2	16.2	16	15	6.4
10	M10-U-M10-	46.2	17.2	19	18	7.9
12	M12-U-M12-	51.2	22.8	22	22	9.5
14	M14-U-M14-	52.0	24.4	25	24	11.1
15	M15-U-M15-	52.0	24.4	25	24	11.9
16	M16-U-M16-	52.0	24.4	25	24	12.7
18	M18-U-M18-	53.5	24.4	30	27	15.1
20	M20-U-M20-	55.0	26.0	32	30	15.9
22	M22-U-M22-	55.0	26.0	32	30	18.3
25	M25-U-M25-	65.0	31.3	38	35	21.8
28	M28-U-M28-	85.0	36.6	46	41	21.8
30	M30-U-M30-	92.7	39.6	50	46	26.2
32	M32-U-M32-	97.3	42.0	50	46	28.6
38	M38-U-M38-	113.6	49.4	60	55	33.7

Conversion Unions

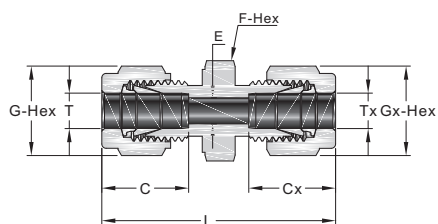


Metric Tube

T-Tube O.D. (mm)	Tx-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	Cx	Gx
3	1/8	M3-U-F2-	35.2	12.9	12	12	2.4	12.7	11.1
4	1/8	M4-U-F2-	36.5	13.7	12	12	2.4	12.7	11.1
4	1/4	M4-U-F4-	39.4	13.7	12	14	2.4	15.2	14.3
6	1/8	M6-U-F2-	38.5	15.3	14	14	2.4	12.7	11.1
6	1/4	M6-U-F4-	41.0	15.3	14	14	4.8	15.2	14.3
6	5/16	M6-U-F5-	42.3	15.3	14	14	4.8	16.2	15.9
8	1/4	M8-U-F4-	42.3	16.2	16	15	4.8	15.2	14.3
8	3/8	M8-U-F6-	44.3	16.2	16	16	6.4	16.8	17.5
10	1/8	M10-U-F2-	41.8	17.2	19	18	2.4	12.7	11.1
10	1/4	M10-U-F4-	44.5	17.2	19	18	4.8	15.2	14.3
10	5/16	M10-U-F5-	45.1	17.2	19	18	6.4	16.2	15.9
10	3/8	M10-U-F6-	45.9	17.2	19	18	7.1	16.8	17.5
12	5/16	M12-U-F5-	47.8	22.8	22	22	6.4	16.2	15.9
12	3/8	M12-U-F6-	48.4	22.8	22	22	7.1	16.8	17.5
12	1/2	M12-U-F8-	51.2	22.8	22	22	9.5	22.9	22.2
15	1/2	M15-U-F8-	52.0	24.4	25	24	10.4	22.9	22.2
16	5/8	M16-U-F10-	52.0	24.4	25	24	12.7	24.4	25.4
18	3/4	M18-U-F12-	53.5	24.4	30	27	15.1	24.4	28.6
20	1/2	M20-U-F8-	55.0	26.0	32	30	10.4	22.9	22.2
20	1	M20-U-F16-	62.8	26.0	32	35	15.9	31.2	38.1
25	1	M25-U-F16-	65.0	31.3	38	35	21.8	31.2	38.1

Fractional Tube


Reducing Unions

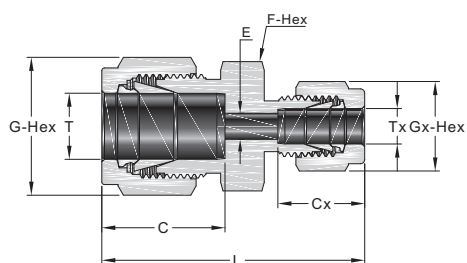

Fractional Tube

T-Tube O.D. (in.)	Tx-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	Cx	Gx
1/8	1/16	F2-U-F1-	31.0	12.7	11.1	11.1	1.3	8.6	7.9
3/16	1/16	F3-U-F1-	32.3	13.7	12.7	11.1	1.3	8.6	7.9
3/16	1/8	F3-U-F2-	36.6	13.7	12.7	11.1	2.3	12.7	11.1
1/4	1/16	F4-U-F1-	34.3	15.2	14.3	12.7	1.3	8.6	7.9
1/4	1/8	F4-U-F2-	38.6	15.2	14.3	12.7	2.3	12.7	11.1
1/4	3/16	F4-U-F3-	39.4	15.2	14.3	12.7	3.0	13.7	12.7
5/16	1/8	F5-U-F2-	39.6	16.2	15.9	14.3	2.3	12.7	11.1
5/16	1/4	F5-U-F4-	42.2	16.2	15.9	14.3	4.8	15.2	14.3
3/8	1/16	F6-U-F1-	36.6	16.8	17.5	15.9	1.3	8.6	7.9
3/8	1/8	F6-U-F2-	40.9	16.8	17.5	15.9	2.3	12.7	11.1
3/8	1/4	F6-U-F4-	43.2	16.8	17.5	15.9	4.8	15.2	14.3
3/8	5/16	F6-U-F5-	44.2	16.8	17.5	15.9	6.4	16.2	15.9
1/2	1/8	F8-U-F2-	45.2	22.8	22.2	20.6	2.3	12.7	11.1
1/2	1/4	F8-U-F4-	47.0	22.8	22.2	20.6	4.8	15.2	14.3
1/2	3/8	F8-U-F6-	48.5	22.8	22.2	20.6	7.1	16.8	17.5
5/8	3/8	F10-U-F6-	49.3	24.4	25.4	23.9	7.1	16.8	17.5
5/8	1/2	F10-U-F8-	52.1	24.4	25.4	23.9	10.4	22.8	22.2
3/4	1/4	F12-U-F4-	49.3	24.4	28.6	27.0	4.8	15.2	14.3
3/4	3/8	F12-U-F6-	50.8	24.4	28.6	27.0	7.1	16.8	17.5
3/4	1/2	F12-U-F8-	53.6	24.4	28.6	27.0	10.4	22.8	22.2
3/4	5/8	F12-U-F10-	53.6	24.4	28.6	27.0	12.7	24.4	25.4
1	1/2	F16-U-F8-	60.5	31.2	38.1	34.9	10.4	22.8	22.2
1	3/4	F16-U-F12-	60.5	31.2	38.1	34.9	15.7	24.4	28.6


Reducing Unions

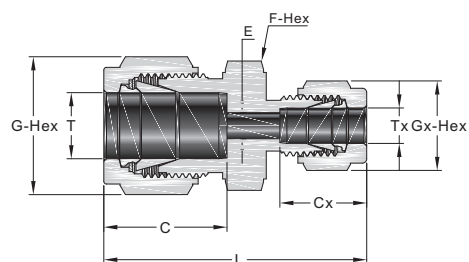

Metric Tube

T-Tube O.D. (mm)	Tx-Tube O.D. (mm)	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	Cx	Gx
3	2	M3-U-M2-	35.3	12.9	12	12	1.7	12.9	12
6	2	M6-U-M2-	38.6	15.3	14	14	1.7	12.9	12
6	3	M6-U-M3-	38.6	15.3	14	14	2.4	12.9	12
6	4	M6-U-M4-	39.4	15.3	14	14	2.4	13.7	12
8	6	M8-U-M6-	42.3	16.3	16	15	4.8	15.3	14
10	6	M10-U-M6-	44.5	17.2	19	18	4.8	15.3	14
10	8	M10-U-M8-	45.1	17.2	19	18	6.4	16.3	16
12	6	M12-U-M6-	47.0	22.8	22	22	4.8	15.3	14
12	8	M12-U-M8-	47.8	22.8	22	22	6.4	16.3	16
12	10	M12-U-M10-	48.7	22.8	22	22	7.9	17.2	19
16	10	M16-U-M10-	49.5	24.4	25	24	7.9	17.2	19
16	12	M16-U-M12-	52.0	24.4	25	24	9.5	22.8	22
18	12	M18-U-M12-	53.5	24.4	30	27	9.5	22.8	22
25	18	M25-U-M18-	61.0	31.3	38	35	15.1	24.4	30
25	20	M25-U-M20-	62.3	31.3	38	35	15.9	26.0	32
30	18	M30-U-M18-	75.4	39.6	50	46	15.1	24.4	30
30	20	M30-U-M20-	75.4	39.6	50	46	15.9	26.0	32
30	25	M30-U-M25-	80.1	39.6	50	46	21.8	31.3	38
32	18	M32-U-M18-	77.8	42.0	50	46	15.1	24.4	30
32	20	M32-U-M20-	77.8	42.0	50	46	15.9	26.0	32
32	25	M32-U-M25-	82.3	42.0	50	46	21.8	31.3	38
38	20	M38-U-M20-	87.5	49.4	60	55	15.9	26.0	32
38	25	M38-U-M25-	92.0	49.4	60	55	21.8	31.3	38
38	30	M38-U-M30-	104.6	49.4	60	55	26.2	39.6	50

Bulkhead Unions

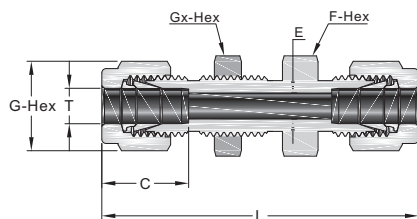


Fractional Tube

Tx-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm						Panel Hole Size (mm)	Max. Panel Thickness (mm)
		L	C	E	G	F	Gx		
1/16	F1-BU-F1-	31.5	8.6	1.3	7.9	7.9	7.9	5.2	3.0
1/8	F2-BU-F2-	51.3	12.7	2.3	11.1	12.7	12.7	8.3	12.7
3/16	F3-BU-F3-	53.6	13.7	3.0	12.7	14.3	14.3	9.9	12.7
1/4	F4-BU-F4-	57.7	15.2	4.8	14.3	15.9	15.9	11.5	10.2
5/16	F5-BU-F5-	60.7	16.3	6.4	15.9	17.5	17.5	13.1	11.2
3/8	F6-BU-F6-	62.2	16.8	7.1	17.5	19.1	19.1	14.7	11.2
1/2	F8-BU-F8-	71.1	22.9	10.4	22.2	23.8	23.8	19.4	12.7
5/8	F10-BU-F10-	72.6	24.4	12.7	25.4	27.0	27.0	22.6	12.7
3/4	F12-BU-F12-	79.0	24.4	15.7	28.6	30.2	30.2	25.8	16.8
7/8	F14-BU-F14-	84.6	25.9	18.3	31.8	34.9	34.9	29.0	19.1
1	F16-BU-F16-	95.8	31.2	22.4	38.1	41.3	41.3	33.7	19.1
1 1/4	F20-BU-F20-	123.2	41.1	27.8	47.6	47.6	47.6	41.7	19.1
1 1/2	F24-BU-F24-	139.2	50.0	34.0	57.2	57.2	57.2	49.6	19.1

Metric Tube

Tx-Tube O.D. (mm)	Basic Ordering Number	Dimension, mm						Panel Hole Size (mm)	Max. Panel Thickness (mm)
		L	C	E	G	F	Gx		
3	M3-BU-M3-	51.3	12.9	2.4	12	14	14	8.3	12.7
4	M4-BU-M4-	53.6	13.7	2.4	12	14	14	9.9	12.7
6	M6-BU-M6-	57.7	15.3	4.8	14	16	16	11.5	10.2
8	M8-BU-M8-	61.0	16.2	6.4	16	18	18	13.1	11.2
10	M10-BU-M10-	63.7	17.2	7.9	19	22	22	16.3	11.2
12	M12-BU-M12-	71.0	22.8	9.5	22	24	24	19.5	12.7
14	M14-BU-M14-	72.5	24.4	11.1	25	27	27	22.5	12.7
15	M15-BU-M15-	72.5	24.4	11.9	25	27	27	22.8	12.7
16	M16-BU-M16-	72.5	24.4	12.7	25	27	27	22.8	12.7
18	M18-BU-M18-	78.9	24.4	15.1	30	30	30	26.0	16.8
20	M20-BU-M20-	84.5	26.0	15.9	32	35	35	29.0	19.0
25	M25-BU-M25-	96.0	31.3	21.8	38	41	41	34.0	19.0
30	M30-BU-M30-	124.0	39.6	26.2	50	50	50	40.5	19.0
32	M32-BU-M32-	128.0	42.0	28.6	50	50	50	42.5	19.0
38	M38-BU-M38-	145.0	49.4	33.7	60	60	60	50.5	19.0


Bulkhead Reducing Unions

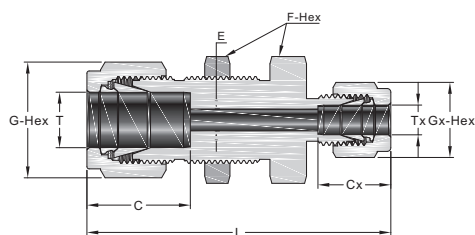

Fractional Tube

T-Tube O.D. (in.)	Tx-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm						Panel Hole Size (mm)	Max. Panel Thickness (mm)
			L	C	E	G	F	Cx		
1/4	1/8	F4-BU-F2-	55.1	15.2	2.3	14.3	15.9	12.7	11.1	10.2
3/8	1/4	F6-BU-F4-	60.7	16.8	4.8	17.5	19.1	15.2	14.3	11.2
1/2	1/4	F8-BU-F4-	66.8	22.9	4.8	22.2	23.8	15.2	14.3	12.7


Bulkhead Reducing Unions

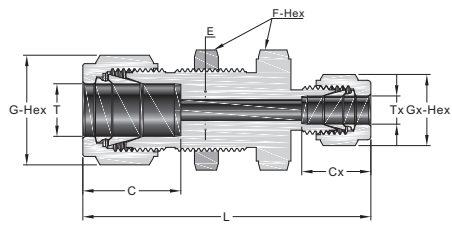

Metric Tube

T-Tube O.D. (mm)	Tx-Tube O.D. (mm)	Basic Ordering Number	Dimension, mm							Panel Hole Size (mm)	Max. Panel Thickness (mm)
			L	C	E	G	F	Cx	Gx		
6	3	M6-BU-M3-	55.1	15.3	2.4	14	16	12.9	12	11.5	10.2
8	6	M8-BU-M6-	60.1	16.2	4.8	16	18	15.3	14	13.1	11.2
12	8	M12-BU-M8-	67.6	22.8	6.4	22	24	16.2	16	19.5	12.7

Male Elbows

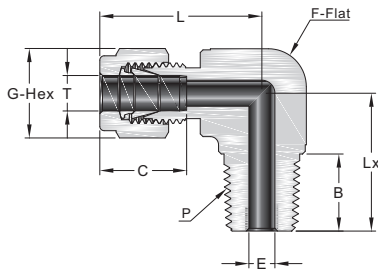

Fractional Tube

NPT Thread


T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	B	Lx
1/16	1/16	F1-ME-NPT1-	19.1	8.6	7.9	11.1	1.3	9.7	17.8
1/16	1/8	F1-ME-NPT2-	19.1	8.6	7.9	11.1	1.3	9.7	17.8
1/8	1/16	F2-ME-NPT1-	23.6	12.7	11.1	11.1	2.4	9.7	17.8
1/8	1/8	F2-ME-NPT2-	23.6	12.7	11.1	11.1	2.4	9.7	17.8
1/8	1/4	F2-ME-NPT4-	24.6	12.7	11.1	12.7	2.4	14.2	23.4
3/16	1/8	F3-ME-NPT2-	25.4	13.7	12.7	12.7	3.0	9.7	18.8
3/16	1/4	F3-ME-NPT4-	25.4	13.7	12.7	12.7	3.0	14.2	23.4
1/4	1/16	F4-ME-NPT1-	26.9	15.2	14.3	12.7	3.0	9.7	18.8
1/4	1/8	F4-ME-NPT2-	26.9	15.2	14.3	12.7	4.8	9.7	18.8
1/4	1/4	F4-ME-NPT4-	26.9	15.2	14.3	12.7	4.8	14.2	23.4
1/4	3/8	F4-ME-NPT6-	29.7	15.2	14.3	17.5	4.8	14.2	26.2
1/4	1/2	F4-ME-NPT8-	31.8	15.2	14.3	20.6	4.8	19.1	33.0
5/16	1/8	F5-ME-NPT2-	28.7	16.3	15.9	14.3	4.8	9.7	19.8
5/16	1/4	F5-ME-NPT4-	28.7	16.3	15.9	14.3	6.4	14.2	24.4
5/16	3/8	F5-ME-NPT6-	30.5	16.3	15.9	17.5	6.4	14.2	26.2
3/8	1/8	F6-ME-NPT2-	30.5	16.8	17.5	15.9	4.8	9.7	20.8
3/8	1/4	F6-ME-NPT4-	30.5	16.8	17.5	15.9	7.1	14.2	25.4
3/8	3/8	F6-ME-NPT6-	31.2	16.8	17.5	17.5	7.1	14.2	26.2
3/8	1/2	F6-ME-NPT8-	33.3	16.8	17.5	20.6	7.1	19.1	33.0
3/8	3/4	F6-ME-NPT12-	37.1	16.8	17.5	27.0	7.1	19.1	36.8
1/2	1/4	F8-ME-NPT4-	36.1	22.9	22.2	20.6	7.1	14.2	28.2
1/2	3/8	F8-ME-NPT6-	36.1	22.9	22.2	20.6	9.7	14.2	28.2
1/2	1/2	F8-ME-NPT8-	36.1	22.9	22.2	20.6	10.4	19.1	33.0
1/2	3/4	F8-ME-NPT12-	39.9	22.9	22.2	27.0	10.4	19.1	36.8
5/8	3/8	F10-ME-NPT6-	38.1	24.4	25.4	23.8	9.7	14.2	30.2
5/8	1/2	F10-ME-NPT8-	38.1	24.4	25.4	23.8	11.9	19.1	35.1
5/8	3/4	F10-ME-NPT12-	39.9	24.4	25.4	27.0	12.7	19.1	36.8
3/4	1/2	F12-ME-NPT8-	39.9	24.4	28.6	27.0	11.9	19.1	36.8
3/4	3/4	F12-ME-NPT12-	39.9	24.4	28.6	27.0	15.7	19.1	36.8
7/8	3/4	F14-ME-NPT12-	44.7	25.9	31.8	34.9	15.7	19.1	41.7
1	3/4	F16-ME-NPT12-	49.0	31.2	38.1	34.9	15.7	19.1	41.7
1	1	F16-ME-NPT16-	49.0	31.2	38.1	34.9	22.4	23.9	46.5
1 1/4	1 1/4	F20-ME-NPT20-	66.5	41.1	47.6	42.9	27.7	23.9	52.4
1 1/2	1 1/2	F24-ME-NPT24-	78.0	50.0	57.2	50.8	34.0	26.2	60.5

Fractional Tube

ISO Tapered Thread (BSPT)

T-Tube O.D. (in.)	P-BSPT Size	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	B	Lx
1/8	1/8	F2-ME-MBT2-	23.6	12.7	11.1	11.1	2.4	9.7	17.8
1/8	1/4	F2-ME-MBT4-	24.6	12.7	11.1	12.7	2.4	14.2	23.4
1/4	1/8	F4-ME-MBT2-	26.9	15.2	14.3	12.7	4.8	9.7	18.8
1/4	1/4	F4-ME-MBT4-	26.9	15.2	14.3	12.7	4.8	14.2	23.4
1/4	3/8	F4-ME-MBT6-	29.7	15.2	14.3	17.5	4.8	14.2	26.2
1/4	1/2	F4-ME-MBT8-	31.8	15.2	14.3	20.6	4.8	19.1	33.0
5/16	1/4	F5-ME-MBT4-	28.7	16.3	15.9	14.3	6.4	14.2	24.4
3/8	1/8	F6-ME-MBT2-	30.5	16.8	17.5	15.9	4.8	9.7	20.8
3/8	1/4	F6-ME-MBT4-	30.5	16.8	17.5	15.9	7.1	14.2	25.4
3/8	3/8	F6-ME-MBT6-	31.2	16.8	17.5	17.5	7.1	14.2	26.2
1/2	3/8	F8-ME-MBT6-	36.1	22.9	22.2	20.6	9.7	14.2	27.9
1/2	1/2	F8-ME-MBT8-	36.1	22.9	22.2	20.6	10.4	19.1	33.0
3/4	1/2	F12-ME-MBT8-	39.9	24.4	28.6	27.0	11.9	19.1	36.8
1	1	F16-ME-MBT16-	49.0	31.2	38.1	34.9	22.4	23.9	46.5

Male Elbows

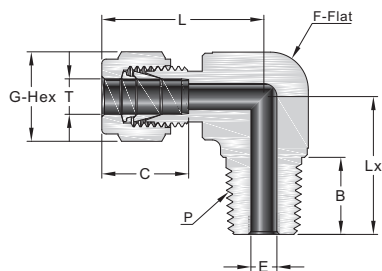


Metric Tube

NPT Thread

T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	B	Lx
3	1/8	M3-ME-NPT2-	23.6	12.9	12	11.1	2.4	9.7	17.8
3	1/4	M3-ME-NPT4-	24.6	12.9	12	12.7	2.4	14.2	23.4
4	1/8	M4-ME-NPT2-	25.4	13.7	12	12.7	2.4	9.7	18.8
4	1/4	M4-ME-NPT4-	25.4	13.7	12	12.7	2.4	14.2	23.4
6	1/8	M6-ME-NPT2-	27.0	15.3	14	12.7	4.8	9.7	18.8
6	1/4	M6-ME-NPT4-	27.0	15.3	14	12.7	4.8	14.2	23.4
6	3/8	M6-ME-NPT6-	29.8	15.3	14	17.5	4.8	14.2	26.2
6	1/2	M6-ME-NPT8-	31.8	15.3	14	20.6	4.8	19.0	33.0
8	1/8	M8-ME-NPT2-	28.8	16.2	16	14.3	4.8	9.7	19.8
8	1/4	M8-ME-NPT4-	28.8	16.2	16	14.3	6.4	14.2	24.4
8	3/8	M8-ME-NPT6-	30.6	16.2	16	17.5	6.4	14.2	26.2
8	1/2	M8-ME-NPT8-	32.6	16.2	16	20.6	6.4	19.1	33.0
10	1/8	M10-ME-NPT2-	31.5	17.2	19	17.5	4.8	9.7	21.6
10	1/4	M10-ME-NPT4-	31.5	17.2	19	17.5	7.1	14.2	26.2
10	3/8	M10-ME-NPT6-	31.5	17.2	19	17.5	7.9	14.2	26.2
10	1/2	M10-ME-NPT8-	33.5	17.2	19	20.6	7.9	19.1	33.0
12	1/8	M12-ME-NPT2-	36.0	22.8	22	20.6	4.8	9.7	23.6
12	1/4	M12-ME-NPT4-	36.0	22.8	22	20.6	7.1	14.2	28.2
12	3/8	M12-ME-NPT6-	36.0	22.8	22	20.6	9.5	14.2	28.2
12	1/2	M12-ME-NPT8-	36.0	22.8	22	20.6	9.5	19.1	33.0
12	3/4	M12-ME-NPT12-	39.8	22.8	22	27.0	9.5	19.1	36.8
15	1/2	M15-ME-NPT8-	38.0	24.4	25	23.8	11.9	19.1	35.1
16	1/4	M16-ME-NPT4-	38.0	24.4	25	23.8	7.1	14.2	30.2
16	3/8	M16-ME-NPT6-	38.0	24.4	25	23.8	9.5	14.2	30.2
16	1/2	M16-ME-NPT8-	38.0	24.4	25	23.8	11.9	19.1	35.1
16	3/4	M16-ME-NPT12-	39.8	24.4	25	27.0	12.7	19.1	36.8
18	1/2	M18-ME-NPT8-	39.8	24.4	30	27.0	11.9	19.1	36.8
18	3/4	M18-ME-NPT12-	39.8	24.4	30	27.0	15.1	19.1	36.8
20	1/2	M20-ME-NPT8-	44.6	26.0	32	34.9	11.9	19.1	41.7
20	3/4	M20-ME-NPT12-	44.6	26.0	32	34.9	15.9	19.1	41.7
22	3/4	M22-ME-NPT12-	44.6	26.0	32	34.9	15.9	19.1	41.7
22	1	M22-ME-NPT16-	44.6	26.0	32	34.9	18.3	23.9	46.5
25	3/4	M25-ME-NPT12-	49.1	31.3	38	34.9	15.9	19.0	41.7
25	1	M25-ME-NPT16-	49.1	31.3	38	34.9	21.8	23.9	46.5
30	1 1/4	M30-ME-NPT20-	69.9	39.6	50	42.9	26.2	23.9	53.1
32	1 1/4	M32-ME-NPT20-	72.3	42.0	50	42.9	27.8	23.9	53.1
38	1 1/2	M38-ME-NPT24-	84.0	49.4	60	50.8	33.7	26.2	60.4

Male Elbows

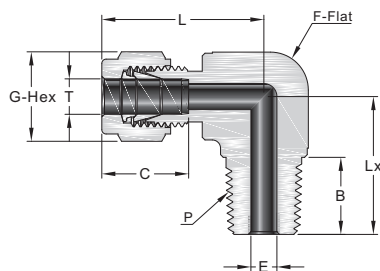


Metric Tube

ISO Tapered Thread (BSPT)

T-Tube O.D. (mm)	P-BSPT Size	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	B	Lx
3	1/8	M3-ME-MBT2-	23.6	12.9	12	11.1	2.4	9.7	17.8
3	1/4	M3-ME-MBT4-	24.6	12.9	12	12.7	2.4	14.2	23.4
4	1/8	M4-ME-MBT2-	25.4	13.7	12	12.7	2.4	9.7	18.8
4	1/4	M4-ME-MBT4-	25.4	13.7	12	12.7	2.4	14.2	23.4
6	1/8	M6-ME-MBT2-	27.0	15.3	14	12.7	4.8	9.7	18.8
6	1/4	M6-ME-MBT4-	27.0	15.3	14	12.7	4.8	14.2	23.4
6	3/8	M6-ME-MBT6-	29.8	15.3	14	17.5	4.8	14.2	26.2
6	1/2	M6-ME-MBT8-	31.8	15.3	14	20.6	4.8	19.0	33.0
8	1/8	M8-ME-MBT2-	28.8	16.2	16	14.3	4.8	9.7	19.8
8	1/4	M8-ME-MBT4-	28.8	16.2	16	14.3	6.4	14.2	24.4
8	3/8	M8-ME-MBT6-	30.6	16.2	16	17.5	6.4	14.2	26.2
8	1/2	M8-ME-MBT8-	32.6	16.2	16	20.6	6.4	19.1	33.0
10	1/8	M10-ME-MBT2-	31.5	17.2	19	17.5	4.8	9.7	21.6
10	1/4	M10-ME-MBT4-	31.5	17.2	19	17.5	7.1	14.2	26.2
10	3/8	M10-ME-MBT6-	31.5	17.2	19	17.5	7.9	14.2	26.2
10	1/2	M10-ME-MBT8-	33.5	17.2	19	20.6	7.9	19.1	33.0
12	1/8	M12-ME-MBT2-	36.0	22.8	22	20.6	4.8	9.7	23.6
12	1/4	M12-ME-MBT4-	36.0	22.8	22	20.6	7.1	14.2	28.2
12	3/8	M12-ME-MBT6-	36.0	22.8	22	20.6	9.5	14.2	28.2
12	1/2	M12-ME-MBT8-	36.0	22.8	22	20.6	9.5	19.1	33.0
12	3/4	M12-ME-MBT12-	39.8	22.8	22	27.0	9.5	19.1	36.8
14	1/2	M14-ME-MBT8-	38.1	24.4	25	23.8	11.1	19.1	35.1
15	1/2	M15-ME-MBT8-	38.1	24.4	25	23.8	11.9	19.1	35.1
16	1/4	M16-ME-MBT4-	38.0	24.4	25	23.8	7.1	14.2	30.2
16	3/8	M16-ME-MBT6-	38.0	24.4	25	23.8	9.5	14.2	30.2
16	1/2	M16-ME-MBT8-	38.0	24.4	25	23.8	11.9	19.1	35.1
16	3/4	M16-ME-MBT12-	39.8	24.4	25	27.0	12.7	19.1	36.8
18	1/2	M18-ME-MBT8-	39.8	24.4	30	27.0	11.9	19.1	36.8
18	3/4	M18-ME-MBT12-	39.8	24.4	30	27.0	15.1	19.1	36.8
20	1/2	M20-ME-MBT8-	44.6	26.0	32	34.9	11.9	19.1	41.7
20	3/4	M20-ME-MBT12-	44.6	26.0	32	34.9	15.9	19.1	41.7
22	3/4	M22-ME-MBT12-	44.6	26.0	32	34.9	15.9	19.1	41.7
22	1	M22-ME-MBT16-	44.6	26.0	32	34.9	18.3	23.9	46.5
25	3/4	M25-ME-MBT12-	49.1	31.3	38	34.9	15.9	19.1	41.7
25	1	M25-ME-MBT16-	49.1	31.3	38	34.9	21.8	23.9	46.5
28	1	M28-ME-MBT16-	64.0	36.6	46	42.9	21.8	23.9	53.1

45° Male Elbows

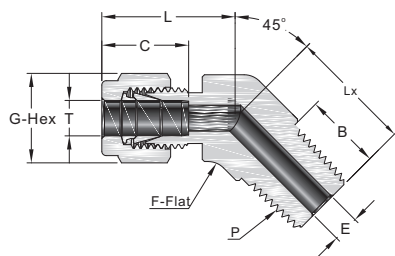

Fractional Tube

NPT Thread

T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	B	Lx
1/16	1/16	F1-45ME-NPT1-	15.7	8.6	7.9	9.5	1.3	9.7	14.5
1/8	1/8	F2-45ME-NPT2-	20.8	12.7	11.1	11.1	2.3	9.7	16.8
3/16	1/8	F3-45ME-NPT2-	21.6	13.7	12.7	11.1	3.0	9.7	14.7
1/4	1/8	F4-45ME-NPT2-	24.6	15.2	14.3	12.7	4.8	9.7	16.5
1/4	1/4	F4-45ME-NPT4-	24.6	15.2	14.3	12.7	4.8	14.3	21.1
5/16	1/8	F5-45ME-NPT2-	24.1	16.3	15.9	14.3	4.8	9.7	16.8
3/8	1/8	F6-45ME-NPT2-	27.9	16.8	17.5	15.9	4.8	9.7	18.3
3/8	1/4	F6-45ME-NPT4-	27.9	16.8	17.5	15.9	7.1	14.3	22.9
3/8	3/8	F6-45ME-NPT6-	29.2	16.8	17.5	20.6	7.1	19.1	24.1
1/2	3/8	F8-45ME-NPT6-	32.0	22.9	22.2	20.6	9.7	19.1	24.1
5/8	1/2	F10-45ME-NPT8-	30.7	24.4	25.4	23.8	11.9	19.1	29.7
3/4	3/4	F12-45ME-NPT12-	34.0	24.4	28.6	27.0	15.7	19.1	31.0
7/8	3/4	F14-45ME-NPT12-	40.4	25.9	31.8	31.8	15.7	19.1	32.3
1	1	F16-45ME-NPT16-	40.4	31.2	38.1	34.9	22.4	23.9	37.8

Metric Tube


NPT Thread

T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	B	Lx
6	1/8	M6-45ME-NPT2-	23.4	15.3	14	12.7	4.8	9.7	16.8
6	1/4	M6-45ME-NPT4-	23.4	15.3	14	12.7	4.8	14.3	21.8
8	1/8	M8-45ME-NPT2-	24.3	16.2	16	15.9	4.8	9.7	16.8
10	1/4	M10-45ME-NPT4-	26.6	17.2	19	17.5	7.9	14.3	24.1
12	3/8	M12-45ME-NPT6-	29.1	22.8	22	20.6	9.5	19.1	24.1
12	1/2	M12-45ME-NPT8-	30.7	22.8	22	20.6	9.5	19.1	29.7
16	1/2	M16-45ME-NPT8-	30.7	24.4	25	23.8	11.9	19.1	29.7

Positionable Male Elbows

SAE/MS Straight Thread

Adapt to straight thread boss of SAE J1926-1,
ISO 11926-1 and MS 16142.

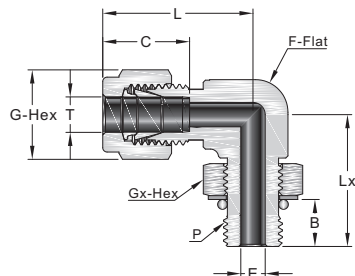


Fractional Tube

SAE/MS Straight Thread

T-Tube O.D. (in.)	P-SAE/MS Thread Size	Basic Ordering Number	Dimension, mm							
			L	B	C	G	E	F	Lx	Gx
1/4	7/16-20	F4-PME-PST7-	28.4	9.9	15.2	14.3	4.8	12.7	28.4	14.3
1/4	9/16-18	F4-PME-PST9-	30.5	11.2	15.2	14.3	4.8	15.9	32.3	17.5
5/16	1/2-20	F5-PME-PST8-	30.2	9.9	16.3	15.9	5.8	14.3	29.5	15.9
3/8	7/16-20	F6-PME-PST7-	33.3	9.9	16.8	17.5	5.1	15.9	31.5	14.3
3/8	9/16-18	F6-PME-PST9-	32.0	11.2	16.8	17.5	7.1	15.9	32.3	17.5
3/8	3/4-16	F6-PME-PST12-	34.8	12.7	16.8	17.5	7.1	20.6	37.8	22.2
1/2	9/16-18	F8-PME-PST9-	37.6	11.2	22.9	22.2	7.1	20.6	37.5	17.5
1/2	3/4-16	F8-PME-PST12-	37.6	12.7	22.9	22.2	10.4	20.6	37.8	22.2
5/8	7/8-14	F10-PME-PST14-	39.6	14.2	24.4	25.4	12.7	23.8	43.4	25.4
3/4	1 1/16-12	F12-PME-PST17-	41.4	16.8	24.4	28.6	15.7	27.0	48.8	31.8
7/8	1 3/16-12	F14-PME-PST19-	43.2	16.8	25.9	31.8	18.3	30.2	50.5	34.9
1	1 5/16-12	F16-PME-PST21-	50.5	16.8	31.2	38.1	22.4	34.9	53.6	38.1
1 1/4	1 5/8-12	F20-PME-PST26-	67.8	16.8	41.1	47.6	27.7	42.9	58.2	47.6
1 1/2	1 7/8-12	F24-PME-PST30-	78.0	16.8	50.0	57.2	34.0	50.8	60.5	54.0

Positionable Male Elbows

ISO Parallel Thread

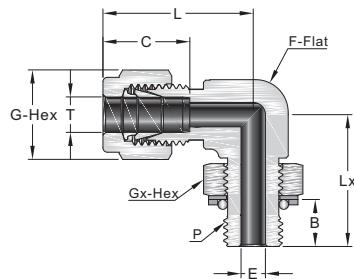

Fractional Tube

ISO Parallel Thread (PPT)

T-Tube O.D. (in.)	P-ISO Parallel Thread Size	Basic Ordering Number	Dimension, mm							
			L	B	C	G	E	F	Lx	Gx
1/4	1/8	F4-PME-PPT2-	26.9	8.1	15.2	14.3	4.1	12.7	26.4	14.3
1/4	1/4	F4-PME-PPT4-	29.0	9.1	15.2	14.3	4.8	15.9	32.3	19.1
3/8	1/4	F6-PME-PPT4-	30.5	9.1	16.8	17.5	5.8	15.9	32.3	19.1
3/8	3/8	F6-PME-PPT6-	33.3	9.4	16.8	17.5	7.1	20.6	37.1	22.2
1/2	1/4	F8-PME-PPT4-	36.1	9.1	22.9	22.2	5.8	20.6	35.1	19.1
1/2	3/8	F8-PME-PPT6-	36.1	9.4	22.9	22.2	7.9	20.6	37.1	22.2
1/2	1/2	F8-PME-PPT8-	38.1	13.0	22.9	22.2	10.4	23.8	43.4	27.0
5/8	1/2	F10-PME-PPT8-	38.1	13.0	24.4	25.4	11.9	23.8	43.4	27.0
3/4	1/2	F12-PME-PPT8-	39.9	13.0	24.4	28.6	11.9	27.0	45.2	27.0
3/4	3/4	F12-PME-PPT12-	39.9	13.0	24.4	28.6	15.7	27.0	48.8	34.9
1	3/4	F16-PME-PPT12-	49.0	13.0	31.2	38.1	15.7	34.9	53.3	34.9
1	1	F16-PME-PPT16-	49.0	14.0	31.2	38.1	19.8	34.9	53.6	41.3

Metric Tube


ISO Parallel Thread (PPT)

T-Tube O.D. (mm)	P-ISO Parallel Thread Size	Basic Ordering Number	Dimension, mm							
			L	B	C	G	E	F	Lx	Gx
6	1/8	M6-PME-PPT2-	27.0	8.1	15.3	14	4.0	12.7	26.4	14.3
6	1/4	M6-PME-PPT4-	29.0	9.1	15.3	14	4.8	15.9	32.3	19.1
8	1/8	M8-PME-PPT2-	28.8	8.1	16.2	16	4.0	14.3	27.4	14.3
8	1/4	M8-PME-PPT4-	29.9	9.1	16.2	16	5.9	15.9	32.2	19.1
10	1/4	M10-PME-PPT4-	33.5	9.1	17.2	19	5.9	20.6	35.0	19.1
10	3/8	M10-PME-PPT6-	33.5	9.4	17.2	19	7.9	20.6	37.1	22.2
12	1/4	M12-PME-PPT4-	36.0	9.1	22.8	22	5.9	20.6	35.0	19.1
12	3/8	M12-PME-PPT6-	36.0	9.4	22.8	22	7.9	20.6	37.1	22.2
12	1/2	M12-PME-PPT8-	38.0	13.0	22.8	22	9.5	23.8	43.4	27.0
12	3/4	M12-PME-PPT12-	39.8	13.0	22.8	22	9.5	27.0	48.8	34.9

45° Positionable Male Elbows

SAE/MS Straight Thread

Adapt to straight thread boss of SAE J1926-1,
ISO 11926-1 and MS 16142.

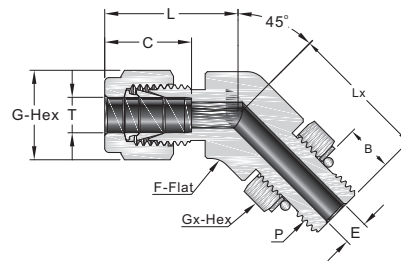


Fractional Tube

SAE/MS Straight Thread

T-Tube O.D. (in.)	P-SAE/MS Thread Size	Basic Ordering Number	Dimension, mm							
			L	B	C	G	E	F	Lx	Gx
1/4	7/16-20	F4-45PME-PST7-	25.7	9.9	15.2	14.3	4.8	12.7	25.7	14.3
3/8	9/16-18	F6-45PME-PST9-	27.9	11.2	16.8	17.5	7.1	15.9	28.2	17.5
1/2	3/4-16	F8-45PME-PST12-	32.0	12.7	22.9	22.2	10.4	20.6	32.3	22.2
3/4	1 1/16-12	F12-45PME-PST17-	39.9	16.8	24.4	28.6	15.7	27.0	47.2	31.8
1	1 5/16-12	F16-45PME-PST21-	47.5	16.8	31.2	38.1	22.4	33.3	50.5	38.1

Female Elbows

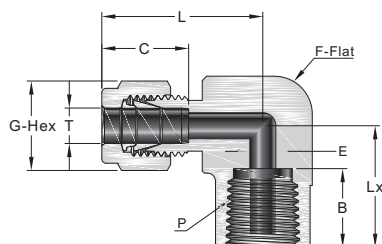

Fractional Tube

NPT Thread


T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, mm						
			L	B	C	G	E	F	Lx
1/16	1/16	F1-FE-FNPT1-	18.0	9.9	8.6	7.9	1.3	11.1	14.2
1/16	1/8	F1-FE-FNPT2-	20.6	10.4	8.6	7.9	1.3	14.3	19.1
1/8	1/8	F2-FE-FNPT2-	24.6	10.4	12.7	11.1	2.3	14.3	19.1
1/8	1/4	F2-FE-FNPT4-	27.4	15.0	12.7	11.1	2.3	17.5	22.4
3/16	1/8	F3-FE-FNPT2-	25.4	10.4	13.7	12.7	3.0	12.7	19.1
1/4	1/8	F4-FE-FNPT2-	26.9	10.4	15.2	14.3	4.8	14.3	19.1
1/4	1/4	F4-FE-FNPT4-	29.7	15.0	15.2	14.3	4.8	17.5	22.4
1/4	3/8	F4-FE-FNPT6-	31.8	15.0	15.2	14.3	4.8	20.6	22.4
1/4	1/2	F4-FE-FNPT8-	34.5	19.8	15.2	14.3	4.8	25.4	28.4
5/16	1/8	F5-FE-FNPT2-	28.7	10.4	16.3	15.9	6.4	14.3	19.1
5/16	1/4	F5-FE-FNPT4-	30.5	15.0	16.3	15.9	6.4	17.5	22.4
3/8	1/8	F6-FE-FNPT2-	30.5	10.4	16.8	17.5	7.1	15.9	19.1
3/8	1/4	F6-FE-FNPT4-	31.2	15.0	16.8	17.5	7.1	17.5	22.4
3/8	3/8	F6-FE-FNPT6-	33.3	15.0	16.8	17.5	7.1	20.6	22.4
3/8	1/2	F6-FE-FNPT8-	36.1	19.8	16.8	17.5	7.1	25.4	28.4
1/2	1/4	F8-FE-FNPT4-	36.1	15.0	22.9	22.2	10.4	20.6	22.4
1/2	3/8	F8-FE-FNPT6-	36.1	15.0	22.9	22.2	10.4	20.6	22.4
1/2	1/2	F8-FE-FNPT8-	38.9	19.8	22.9	22.2	10.4	25.4	28.4
5/8	3/8	F10-FE-FNPT6-	38.1	15.0	24.4	25.4	12.7	23.8	22.4
5/8	1/2	F10-FE-FNPT8-	39.9	19.8	24.4	25.4	12.7	27.0	28.4
3/4	1/2	F12-FE-FNPT8-	39.9	19.8	24.4	28.6	15.7	27.0	28.4
3/4	3/4	F12-FE-FNPT12-	44.7	20.6	24.4	28.6	15.7	34.9	31.8
7/8	3/4	F14-FE-FNPT12-	44.7	20.6	25.9	31.8	18.3	34.9	31.8
1	3/4	F16-FE-FNPT12-	49.0	20.6	31.2	38.1	22.4	34.9	31.8
1	1	F16-FE-FNPT16-	53.6	25.4	31.2	38.1	22.4	42.9	38.1

Metric Tube

NPT Thread

T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, mm						
			L	B	C	G	E	F	Lx
6	1/8	M6-FE-FNPT2-	27.0	10.4	15.3	14	4.8	12.7	19.0
6	1/4	M6-FE-FNPT4-	29.8	15.0	15.3	14	4.8	17.5	22.4
8	1/8	M8-FE-FNPT2-	28.8	10.4	16.2	16	4.8	14.3	19.1
8	1/4	M8-FE-FNPT4-	30.6	15.0	16.2	16	6.4	17.5	22.4
10	1/4	M10-FE-FNPT4-	33.5	15.0	17.2	19	7.9	20.6	22.4
10	3/8	M10-FE-FNPT6-	33.5	15.0	17.2	19	7.9	20.6	22.4
10	1/2	M10-FE-FNPT8-	36.6	19.8	17.2	19	7.9	25.4	28.5
12	1/4	M12-FE-FNPT4-	36.0	15.0	22.8	22	7.9	20.6	22.4
12	3/8	M12-FE-FNPT6-	36.0	15.0	22.8	22	9.5	20.6	22.4
12	1/2	M12-FE-FNPT8-	38.8	19.8	22.8	22	9.5	25.4	28.4
16	3/8	M16-FE-FNPT6-	39.5	15.0	24.4	25	9.5	27.0	23.6
16	1/2	M16-FE-FNPT8-	39.5	19.8	24.4	25	12.7	27.0	28.5

Union Elbows

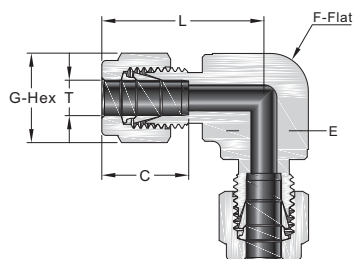


Fractional Tube

T-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm				
		L	C	G	F	E
1/16	F1-UE-F1-	17.8	8.6	7.9	9.5	1.3
1/8	F2-UE-F2-	22.4	12.7	11.1	9.5	2.3
3/16	F3-UE-F3-	25.4	13.7	12.7	12.7	3.0
1/4	F4-UE-F4-	26.9	15.2	14.3	12.7	4.8
5/16	F5-UE-F5-	28.7	16.3	15.9	14.3	6.4
3/8	F6-UE-F6-	30.5	16.8	17.5	15.9	7.1
1/2	F8-UE-F8-	36.1	22.9	22.2	20.6	10.4
5/8	F10-UE-F10-	38.1	24.4	25.4	23.8	12.7
3/4	F12-UE-F12-	39.9	24.4	28.6	27.0	15.7
7/8	F14-UE-F14-	44.7	25.9	31.8	34.9	18.3
1	F16-UE-F16-	49.0	31.2	38.1	34.9	22.4
1 1/8	F18-UE-F18-	55.1	31.2	41.3	42.9	24.6
1 1/4	F20-UE-F20-	66.5	41.1	47.6	42.9	27.7
1 1/2	F24-UE-F24-	78.0	50.0	57.2	50.8	34.0

Metric Tube

T-Tube O.D. (mm)	Basic Ordering Number	Dimension, mm				
		L	C	G	F	E
3	M3-UE-M3-	22.3	12.9	12	9.5	2.4
4	M4-UE-M4-	25.4	13.7	12	12.7	2.4
6	M6-UE-M6-	27.0	15.3	14	12.7	4.8
8	M8-UE-M8-	28.8	16.2	16	14.3	6.4
10	M10-UE-M10-	31.5	17.2	19	17.5	7.9
12	M12-UE-M12-	36.0	22.8	22	20.6	9.5
14	M14-UE-M14-	38.0	24.4	25	23.8	11.0
15	M15-UE-M15-	38.8	24.4	25	23.8	11.9
16	M16-UE-M16-	38.0	24.4	25	23.8	12.7
18	M18-UE-M18-	39.8	24.4	30	27.0	15.1
20	M20-UE-M20-	44.6	26.0	32	34.9	15.9
22	M22-UE-M22-	44.6	26.0	32	34.9	18.3
25	M25-UE-M25-	49.1	31.3	38	34.9	21.8
28	M28-UE-M28-	64.0	36.6	46	42.9	21.8
30	M30-UE-M30-	69.9	39.6	50	42.9	26.2
32	M32-UE-M32-	72.3	42.0	50	42.9	28.6
38	M38-UE-M38-	84.0	49.4	60	50.8	33.7

Union Reducing Elbows

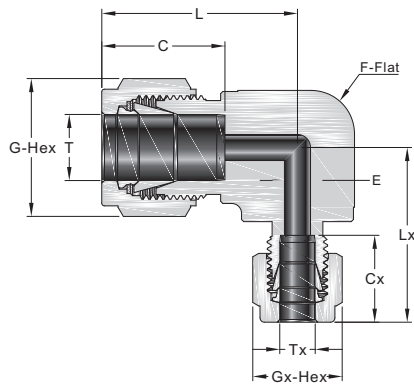


Fractional Tube

T-Tube O.D. (in.)	Tx-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm							
			L	C	G	F	E	Cx	Gx	Lx
3/16	1/8	F3-UE-F2-	25.4	13.7	12.7	12.7	2.3	12.7	11.1	24.7
1/4	1/8	F4-UE-F2-	26.9	15.2	14.3	12.7	2.3	12.7	11.1	25.4
5/16	1/8	F5-UE-F2-	29.7	16.3	15.9	14.3	2.3	12.7	11.1	26.4
5/16	1/4	F5-UE-F4-	29.7	16.3	15.9	14.3	4.8	15.2	14.3	29.0
3/8	1/8	F6-UE-F2-	30.5	16.8	17.5	15.9	2.3	12.7	11.1	26.4
3/8	1/4	F6-UE-F4-	30.5	16.8	17.5	15.9	4.8	15.2	14.3	29.0
3/8	5/16	F6-UE-F5-	30.5	16.8	17.5	15.9	6.4	16.3	15.9	29.7
1/2	1/4	F8-UE-F4-	36.1	22.9	22.2	20.6	4.8	15.2	14.3	32.2
1/2	5/16	F8-UE-F5-	36.1	22.9	22.2	20.6	6.4	16.3	15.9	32.5
1/2	3/8	F8-UE-F6-	36.1	22.9	22.2	20.6	7.1	16.8	17.5	33.6
5/8	3/8	F10-UE-F6-	38.1	24.4	25.4	23.8	7.1	16.8	17.5	35.6
5/8	1/2	F10-UE-F8-	38.1	24.4	25.4	23.8	10.4	22.9	22.2	38.1
3/4	1/4	F12-UE-F4-	39.9	24.4	28.6	27.0	4.8	15.2	14.3	35.9
3/4	3/8	F12-UE-F6-	39.9	24.4	28.6	27.0	7.1	16.8	17.5	37.4
3/4	1/2	F12-UE-F8-	39.9	24.4	28.6	27.0	10.4	22.9	22.2	39.9
7/8	1/4	F14-UE-F4-	44.7	25.9	31.8	34.9	4.8	15.2	14.3	40.7
1	1/2	F16-UE-F8-	49.0	31.2	38.1	34.9	10.4	22.9	22.2	44.4
1	3/4	F16-UE-F12-	49.0	31.2	38.1	34.9	15.7	24.4	28.6	44.4

Metric Tube

T-Tube O.D. (mm)	Tx-Tube O.D. (mm)	Basic Ordering Number	Dimension, mm							
			L	C	G	F	E	Cx	Gx	Lx
8	6	M8-UE-M6-	28.8	16.2	16	14.3	4.8	15.3	14	27.9
10	8	M10-UE-M8-	31.5	17.2	19	17.5	6.4	16.2	16	30.5
12	8	M12-UE-M8-	36.0	22.8	22	20.6	6.4	16.2	16	32.6
14	8	M14-UE-M8-	38.8	24.4	25	23.8	6.4	16.2	16	35.4
14	10	M14-UE-M10-	38.8	24.4	25	23.8	7.9	17.2	19	36.4

Male Branch Tees

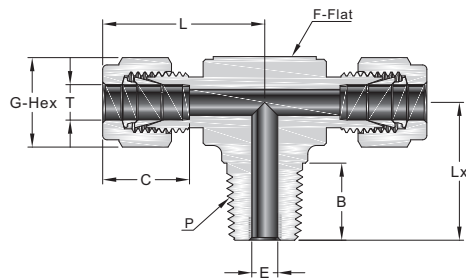

Fractional Tube

NPT Thread


T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	B	Lx
1/8	1/8	F2-MBT-F2-NPT2-	23.6	12.7	11.1	11.1	2.3	9.7	17.8
1/8	1/4	F2-MBT-F2-NPT4-	24.6	12.7	11.1	12.7	2.3	14.2	23.4
3/16	1/8	F3-MBT-F3-NPT2-	24.4	13.7	12.7	11.1	3.0	9.7	17.8
1/4	1/8	F4-MBT-F4-NPT2-	26.9	15.2	14.3	12.7	4.8	9.7	18.8
1/4	1/4	F4-MBT-F4-NPT4-	26.9	15.2	14.3	12.7	4.8	14.2	23.4
5/16	1/8	F5-MBT-F5-NPT2-	29.7	16.3	15.9	15.9	4.8	9.7	20.8
5/16	1/4	F5-MBT-F5-NPT4-	29.7	16.3	15.9	15.9	6.4	14.2	25.7
3/8	1/4	F6-MBT-F6-NPT4-	30.5	16.8	17.5	15.9	7.1	14.2	25.4
3/8	3/8	F6-MBT-F6-NPT6-	33.3	16.8	17.5	20.6	7.1	14.2	28.2
1/2	3/8	F8-MBT-F8-NPT6-	36.1	22.9	22.2	20.6	9.7	14.2	28.2
1/2	1/2	F8-MBT-F8-NPT8-	36.1	22.9	22.2	20.6	10.4	19.1	33.0
5/8	1/2	F10-MBT-F10-NPT8-	38.9	24.4	25.4	25.4	11.9	19.1	35.8
3/4	3/4	F12-MBT-F12-NPT12-	39.9	24.4	28.6	27.0	15.7	19.1	36.8
7/8	3/4	F14-MBT-F14-NPT12-	44.7	25.9	31.8	33.3	15.7	19.1	38.1
1	3/4	F16-MBT-F16-NPT12-	49.3	31.2	38.1	33.3	15.7	19.1	42.2
1	1	F16-MBT-F16-NPT16-	49.3	31.2	38.1	34.9	22.4	23.9	46.7

Metric Tube

NPT Thread

T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	B	Lx
6	1/8	M6-MBT-M6-NPT2-	27.0	15.3	14	12.7	4.8	9.7	18.8
6	1/4	M6-MBT-M6-NPT4-	27.0	15.3	14	12.7	4.8	14.2	23.4
8	1/8	M8-MBT-M8-NPT2-	29.9	16.2	16	15.9	4.8	9.7	20.8
8	1/4	M8-MBT-M8-NPT4-	29.9	16.2	16	15.9	6.4	14.2	25.4
10	1/4	M10-MBT-M10-NPT4-	33.5	17.2	19	20.6	7.9	14.2	28.2
10	3/8	M10-MBT-M10-NPT6-	33.5	17.2	19	20.6	7.9	14.2	28.2
12	1/4	M12-MBT-M12-NPT4-	36.0	22.8	22	20.6	7.9	14.2	28.2
12	3/8	M12-MBT-M12-NPT6-	36.0	22.8	22	20.6	9.5	14.2	28.2
12	1/2	M12-MBT-M12-NPT8-	36.0	22.8	22	20.6	9.5	19.1	33.0
16	1/2	M16-MBT-M16-NPT8-	38.8	24.4	25	25.4	11.9	19.1	35.8

Male Run Tees

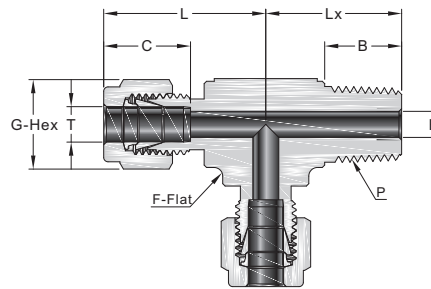


Fractional Tube			NPT Thread						
T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	B	Lx
1/8	1/8	F2-MRT-NPT2-F2-	23.6	12.7	11.1	11.1	2.3	9.7	17.8
1/8	1/4	F2-MRT-NPT4-F2-	24.6	12.7	11.1	12.7	2.3	14.2	23.4
3/16	1/8	F3-MRT-NPT2-F3-	24.4	13.7	12.7	11.1	3.0	9.7	17.8
1/4	1/8	F4-MRT-NPT2-F4-	26.9	15.2	14.3	12.7	4.8	9.7	18.8
1/4	1/4	F4-MRT-NPT4-F4-	26.9	15.2	14.3	12.7	4.8	14.2	23.4
5/16	1/8	F5-MRT-NPT2-F5-	29.7	16.3	15.9	15.9	4.8	9.7	20.8
5/16	1/4	F5-MRT-NPT4-F5-	29.7	16.3	15.9	15.9	6.4	14.2	25.7
3/8	1/4	F6-MRT-NPT4-F6-	30.5	16.8	17.5	15.9	7.1	14.2	25.4
3/8	3/8	F6-MRT-NPT6-F6-	33.3	16.8	17.5	20.6	7.1	14.2	28.2
1/2	3/8	F8-MRT-NPT6-F8-	36.1	22.9	22.2	20.6	9.7	14.2	28.2
1/2	1/2	F8-MRT-NPT8-F8-	36.1	22.9	22.2	20.6	10.4	19.1	33.0
5/8	1/2	F10-MRT-NPT8-F10-	38.1	24.4	25.4	23.8	11.9	19.1	35.8
3/4	3/4	F12-MRT-NPT12-F12-	39.9	24.4	28.6	27.0	15.7	19.1	36.8
7/8	3/4	F14-MRT-NPT12-F14-	44.7	25.9	31.8	33.3	15.7	19.1	38.1
1	3/4	F16-MRT-NPT12-F16-	49.3	31.2	38.1	33.3	15.7	19.1	42.2
1	1	F16-MRT-NPT16-F16-	49.3	31.2	38.1	34.9	22.4	23.9	46.7

Metric Tube			NPT Thread						
T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	B	Lx
6	1/8	M6-MRT-NPT2-M6-	27.0	15.3	14	12.7	4.8	9.7	18.0
6	1/4	M6-MRT-NPT4-M6-	27.0	15.3	14	12.7	4.8	14.2	23.4
8	1/8	M8-MRT-NPT2-M8-	29.9	16.2	16	15.9	4.8	9.7	20.8
8	1/4	M8-MRT-NPT4-M8-	29.9	16.2	16	15.9	6.4	14.2	25.4
10	1/4	M10-MRT-NPT4-M10-	33.5	17.2	19	20.6	7.9	14.2	28.2
10	1/2	M10-MRT-NPT8-M10-	33.5	17.2	19	20.6	7.9	14.2	28.2
12	1/4	M12-MRT-NPT4-M12-	36.0	22.8	22	20.6	7.9	14.2	28.2
12	3/8	M12-MRT-NPT6-M12-	36.0	22.8	22	20.6	9.5	14.2	28.2
12	1/2	M12-MRT-NPT8-M12-	36.0	22.8	22	20.6	9.5	19.1	33.0
16	1/2	M16-MRT-NPT8-M16-	38.0	24.4	25	23.8	11.9	19.1	35.0

Positionable Male Branch Tees

SAE/MS Straight Thread

Adapt to straight thread boss of
SAE J1926-1, ISO 11926-1 and MS 16142.

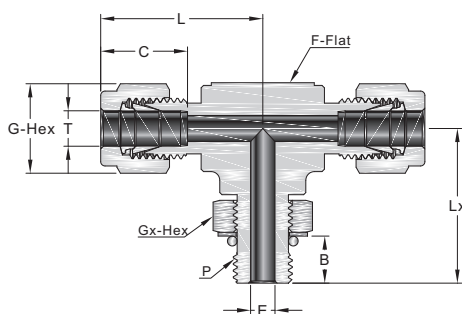


Fractional Tube

SAE/MS Straight Thread

T-Tube O.D. (in.)	P-SAE/MS Thread Size	Basic Ordering Number	Dimension, mm							
			L	B	C	E	G	F	Lx	Gx
1/4	7/16-20	F4-PMBT-F4-PST7-	28.5	9.9	15.2	4.8	14.3	12.7	28.5	14.3
3/8	9/16-18	F6-PMBT-F6-PST9-	32.0	11.2	16.8	7.1	17.5	15.9	32.3	17.5
1/2	3/4-16	F8-PMBT-F8-PST12-	37.6	12.7	22.9	10.4	22.2	20.6	37.8	22.2
3/4	1 1/16-12	F12-PMBT-F12-PST17-	41.4	16.8	24.4	15.7	28.6	27.0	48.8	28.6
1	1 5/16-12	F16-PMBT-F16-PST21-	50.5	16.8	31.2	22.4	38.1	34.9	53.6	38.1
1 1/4	1 5/8-12	F20-PMBT-F20-PST26-	67.8	16.8	41.1	27.7	47.6	42.9	58.2	47.6
1 1/4	1 7/8-12	F24-PMBT-F24-PST30-	78.0	16.8	50.0	34.0	57.2	50.8	60.5	54.0

Positionable Male Branch Tees

ISO Parallel Thread

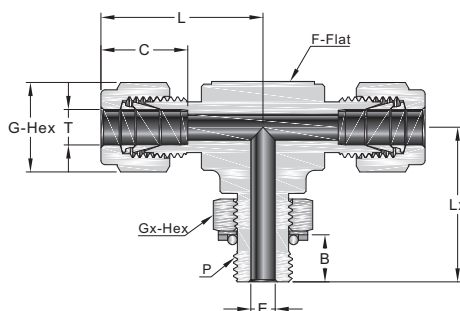

Fractional Tube

ISO Parallel Thread (PPT)

T-Tube O.D. (in.)	P-ISO Parallel Thread Size	Basic Ordering Number	Dimension, mm							
			L	B	C	E	G	F	Lx	Gx
1/4	1/8	F4-PMBT-F4-PPT2-	26.9	8.1	15.2	4.1	14.3	12.7	26.4	14.3
1/4	1/4	F4-PMBT-F4-PPT4-	29.0	9.1	15.2	4.8	14.3	15.9	32.3	19.1
3/8	1/4	F6-PMBT-F6-PPT4-	30.5	9.1	16.8	5.8	17.5	15.9	32.3	19.1
1/2	3/8	F8-PMBT-F8-PPT6-	36.1	9.4	22.9	7.9	22.2	20.6	37.1	22.2
1/2	1/2	F8-PMBT-F8-PPT8-	38.1	13.0	22.9	10.4	22.2	23.8	43.4	27.0
5/8	1/2	F10-PMBT-F10-PPT8-	38.1	13.0	24.4	11.9	25.4	23.8	43.4	27.0
3/4	1/2	F12-PMBT-F12-PPT8-	39.9	13.0	24.4	11.9	28.6	27.0	45.2	27.0
3/4	3/4	F12-PMBT-F12-PPT12-	39.9	13.0	24.4	15.7	28.6	27.0	48.8	34.9
1	1	F16-PMBT-F16-PPT16-	49.0	14.0	31.2	19.8	38.1	34.9	53.6	41.3

Metric Tube


ISO Parallel Thread (PPT)

T-Tube O.D. (mm)	P-ISO Parallel Thread Size	Basic Ordering Number	Dimension, mm							
			L	B	C	E	G	F	Lx	Gx
6	1/8	M6-PMBT-M6-PPT2-	27.0	8.1	15.3	4.0	14	12.7	26.4	14.3
6	1/4	M6-PMBT-M6-PPT4-	29.0	9.1	15.3	4.8	14	15.9	32.2	19.1
8	1/8	M8-PMBT-M8-PPT2-	28.8	8.1	16.2	4.0	16	14.3	27.5	14.3
8	1/4	M8-PMBT-M8-PPT4-	29.9	9.1	16.2	5.9	16	15.9	32.2	19.1
10	1/4	M10-PMBT-M10-PPT4-	33.5	9.1	17.2	5.9	19	20.6	35.1	19.1
12	3/8	M12-PMBT-M12-PPT6-	36.0	9.4	22.8	7.9	22	20.6	37.1	22.2
12	1/2	M12-PMBT-M12-PPT8-	38.0	13.0	22.8	9.5	22	23.8	43.5	27.0

Positionable Male Run Tees

SAE/MS Straight Thread

Adapt to straight thread boss of
SAE J1926-1, ISO 11926-1 and MS 16142.

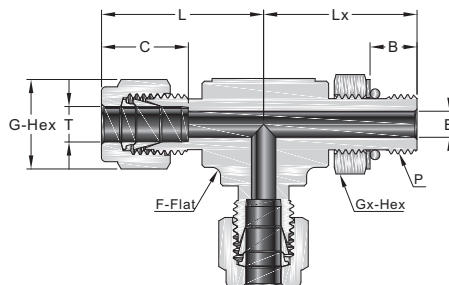


Fractional Tube

SAE/MS Straight Thread

T-Tube O.D. (in.)	P-SAE/MS Thread Size	Basic Ordering Number	Dimension, mm							
			L	B	C	E	G	F	Lx	Gx
1/4	7/16-20	F4-PMRT-PST7-F4-	28.5	9.9	15.2	4.8	14.3	12.7	28.5	14.3
3/8	9/16-18	F6-PMRT-PST9-F6-	32.0	11.2	16.8	7.1	17.5	15.9	32.3	17.5
1/2	3/4-16	F8-PMRT-PST12-F8-	37.6	12.7	22.9	10.4	22.2	20.6	37.8	22.2
3/4	1 1/16-12	F12-PMRT-PST17-F12-	41.4	16.8	24.4	15.7	28.6	27.0	48.8	28.6
1	1 5/16-12	F16-PMRT-PST21-F16-	50.5	16.8	31.2	22.4	38.1	34.9	53.6	38.1
1 1/4	1 5/8-12	F20-PMRT-PST26-F20-	67.8	16.8	41.1	27.7	47.6	42.9	58.2	47.6
1 1/2	1 7/8-12	F24-PMRT-PST30-F24-	78.0	16.8	50.0	34.0	57.2	50.8	60.5	54.0

Positionable Male Run Tees

ISO Parallel Thread

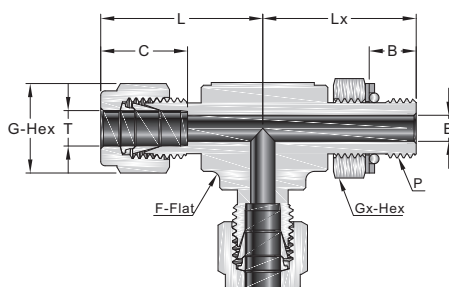

Fractional Tube

ISO Parallel Thread (PPT)


T-Tube O.D. (in.)	P-ISO Parallel Thread Size	Basic Ordering Number	Dimension, mm							
			L	B	C	E	G	F	Lx	Gx
1/4	1/8	F4-PMRT-PPT2-F4-	26.9	8.1	15.2	4.1	14.3	12.7	26.4	14.3
1/4	1/4	F4-PMRT-PPT4-F4-	29.0	9.1	15.2	4.8	14.3	15.9	32.3	19.1
3/8	1/4	F6-PMRT-PPT4-F6-	30.5	9.1	16.8	5.8	17.5	15.9	32.3	19.1
1/2	3/8	F8-PMRT-PPT6-F8-	36.1	9.4	22.9	7.9	22.2	20.6	37.1	22.2
1/2	1/2	F8-PMRT-PPT8-F8-	38.1	13.0	22.9	10.4	22.2	23.8	43.4	27.0
5/8	1/2	F10-PMRT-PPT8-F10-	38.1	13.0	24.4	11.9	25.4	23.8	43.4	27.0
3/4	1/2	F12-PMRT-PPT8-F12-	39.9	13.0	24.4	11.9	28.6	27.0	45.2	27.0
3/4	3/4	F12-PMRT-PPT12-F12-	39.9	13.0	24.4	15.7	28.6	27.0	48.8	34.9
1	1	F16-PMRT-PPT16-F16-	49.0	14.0	31.2	19.8	38.1	34.9	53.6	41.3

Metric Tube

ISO Parallel Thread (PPT)

T-Tube O.D. (mm)	P-ISO Parallel Thread Size	Basic Ordering Number	Dimension, mm							
			L	B	C	E	G	F	Lx	Gx
6	1/8	M6-PMRT-PPT2-M6-	27.0	8.1	15.3	4.0	14	12.7	26.4	14.3
6	1/4	M6-PMRT-PPT4-M6-	29.0	9.1	15.3	4.8	14	15.9	32.2	19.1
8	1/8	M8-PMRT-PPT2-M8-	28.8	8.1	16.2	4.0	16	14.3	27.5	14.3
8	1/4	M8-PMRT-PPT4-M8-	29.9	9.1	16.2	5.9	16	15.9	32.2	19.1
10	1/4	M10-PMRT-PPT4-M10-	33.5	9.1	17.2	5.9	19	20.6	35.1	19.1
12	3/8	M12-PMRT-PPT6-M12-	36.0	9.4	22.8	7.9	22	20.6	37.1	22.2
12	1/2	M12-PMRT-PPT8-M12-	38.0	13.0	22.8	9.5	22	23.8	43.5	27.0

Female Branch Tees

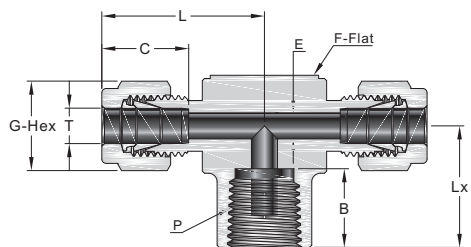

Fractional Tube

NPT Thread


T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	B	Lx
1/8	1/8	F2-FBT-F2-FNPT2-	24.6	12.7	11.1	12.7	2.3	10.4	19.1
3/16	1/8	F3-FBT-F3-FNPT2-	25.7	13.7	12.7	12.7	3.0	10.4	19.1
1/4	1/8	F4-FBT-F4-FNPT2-	26.9	15.2	14.3	12.7	4.8	10.4	19.1
1/4	1/4	F4-FBT-F4-FNPT4-	29.7	15.2	14.3	17.5	4.8	15.0	22.4
5/16	1/8	F5-FBT-F5-FNPT2-	29.7	16.2	15.9	15.9	6.4	10.4	19.1
3/8	1/4	F6-FBT-F6-FNPT4-	31.2	16.8	17.5	17.5	7.1	15.0	22.4
3/8	3/8	F6-FBT-F6-FNPT6-	33.3	16.8	17.5	20.6	7.1	15.0	22.4
3/8	1/2	F6-FBT-F6-FNPT8-	36.1	16.8	17.5	25.4	7.1	19.8	28.4
1/2	1/4	F8-FBT-F8-FNPT4-	36.1	22.9	22.2	20.6	10.4	15.0	22.4
1/2	3/8	F8-FBT-F8-FNPT6-	36.1	22.9	22.2	20.6	10.4	15.0	22.4
1/2	1/2	F8-FBT-F8-FNPT8-	38.9	22.9	22.2	25.4	10.4	19.8	28.4
5/8	1/2	F10-FBT-F10-FNPT8-	38.9	24.4	25.4	25.4	12.7	19.8	28.4
3/4	3/4	F12-FBT-F12-FNPT12-	44.7	24.4	28.6	34.9	15.7	20.6	31.8
7/8	3/4	F14-FBT-F14-FNPT12-	44.7	25.9	31.8	34.9	18.3	20.6	31.8
1	3/4	F16-FBT-F16-FNPT12-	49.0	31.2	38.1	34.9	22.4	20.6	31.8
1	1	F16-FBT-F16-FNPT16-	53.6	31.2	38.1	42.9	22.4	25.4	38.1

Metric Tube

NPT Thread

T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	B	Lx
6	1/8	M6-FBT-M6-FNPT2-	27.0	15.3	14	12.7	4.8	10.4	19.0
6	1/4	M6-FBT-M6-FNPT4-	29.8	15.3	14	17.5	4.8	15.0	22.4
8	1/8	M8-FBT-M8-FNPT2-	29.9	16.2	16	15.9	6.4	10.4	19.0
8	1/4	M8-FBT-M8-FNPT4-	30.6	16.2	16	17.5	6.4	15.0	22.4
10	1/4	M10-FBT-M10-FNPT4-	33.5	17.2	19	20.6	7.9	15.0	22.4
12	1/8	M12-FBT-M12-FNPT2-	36.0	22.8	22	20.6	6.4	10.4	22.3
12	1/4	M12-FBT-M12-FNPT4-	36.0	22.8	22	20.6	9.5	15.0	22.4
12	3/8	M12-FBT-M12-FNPT6-	36.0	22.8	22	20.6	9.5	15.0	22.4
12	1/2	M12-FBT-M12-FNPT8-	38.8	22.8	22	25.4	9.5	19.8	28.5
16	1/2	M16-FBT-M16-FNPT8-	38.8	24.4	25	25.4	12.7	19.8	28.4

Female Run Tees

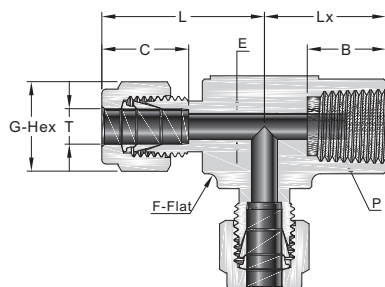

Fractional Tube

NPT Thread


T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	B	Lx
1/8	1/8	F2-FRT-FNPT2-F2-	24.6	12.7	11.1	12.7	2.3	10.4	19.1
3/16	1/8	F3-FRT-FNPT2-F3-	25.7	13.7	12.7	12.7	3.0	10.4	19.1
1/4	1/8	F4-FRT-FNPT2-F4-	26.9	15.2	14.3	12.7	4.8	10.4	19.1
1/4	1/4	F4-FRT-FNPT4-F4-	29.7	15.2	14.3	17.5	4.8	15.0	22.4
5/16	1/8	F5-FRT-FNPT2-F5-	29.7	16.2	15.9	15.9	6.4	10.4	19.1
3/8	1/4	F6-FRT-FNPT4-F6-	31.2	16.8	17.5	17.5	7.1	15.0	22.4
1/2	1/4	F8-FRT-FNPT4-F8-	36.1	22.9	22.2	20.6	10.4	15.0	22.4
1/2	3/8	F8-FRT-FNPT6-F8-	36.1	22.9	22.2	20.6	10.4	15.0	22.4
1/2	1/2	F8-FRT-FNPT8-F8-	39.9	22.9	22.2	27.0	10.4	19.8	28.4
5/8	1/2	F10-FRT-FNPT8-F10-	39.9	24.4	25.4	27.0	12.7	19.8	28.4
3/4	3/4	F12-FRT-FNPT12-F12-	44.7	24.4	28.6	34.9	15.7	20.6	31.8
7/8	1/2	F14-FRT-FNPT8-F14-	44.7	25.9	31.8	34.9	15.7	19.8	28.4
7/8	3/4	F14-FRT-FNPT12-F14-	44.7	25.9	31.8	34.9	18.3	20.6	31.8
1	3/4	F16-FRT-FNPT12-F16-	49.0	31.2	38.1	34.9	22.4	20.6	31.8
1	1	F16-FRT-FNPT16-F16-	53.6	31.2	38.1	42.9	22.4	25.4	38.1

Metric Tube

NPT Thread

T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	B	Lx
6	1/8	M6-FRT-FNPT2-M6-	27.0	15.3	14	12.7	4.8	10.4	19.0
6	1/4	M6-FRT-FNPT4-M6-	29.8	15.3	14	17.5	4.8	15.0	22.4
8	1/8	M8-FRT-FNPT2-M8-	29.9	16.2	16	15.9	4.8	10.4	19.0
8	1/4	M8-FRT-FNPT4-M8-	30.6	16.2	16	17.5	6.4	15.0	22.4
10	1/4	M10-FRT-FNPT4-M10-	33.5	17.2	19	20.6	7.9	15.0	22.4
12	1/4	M12-FRT-FNPT4-M12-	36.0	22.8	22	20.6	9.5	15.0	22.4
12	3/8	M12-FRT-FNPT6-M12-	36.0	22.8	22	20.6	9.5	15.0	23.1
12	1/2	M12-FRT-FNPT8-M12-	38.8	22.8	22	25.4	9.5	19.8	28.5
16	1/2	M16-FRT-FNPT8-M16-	39.8	24.4	25	27.0	11.9	19.8	28.4

Union Tees

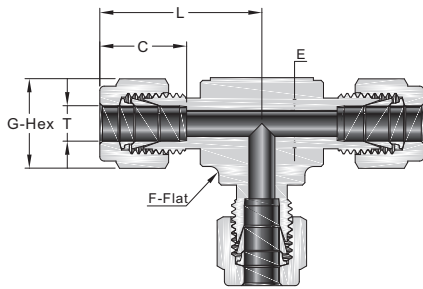


Fractional Tube

T-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm				
		L	C	G	F	E
1/16	F1-UT-F1-F1-	17.8	8.6	7.9	9.5	1.3
1/8	F2-UT-F2-F2-	22.4	12.7	11.1	9.5	2.3
3/16	F3-UT-F3-F3-	24.4	13.7	12.7	11.1	3.0
1/4	F4-UT-F4-F4-	26.9	15.2	14.3	12.7	4.8
5/16	F5-UT-F5-F5-	29.7	16.2	15.9	15.9	6.4
3/8	F6-UT-F6-F6-	30.5	16.8	17.5	15.9	7.1
1/2	F8-UT-F8-F8-	36.1	22.9	22.2	20.6	10.4
5/8	F10-UT-F10-F10-	38.9	24.4	25.4	25.4	12.7
3/4	F12-UT-F12-F12-	39.9	24.4	28.6	27.0	15.7
7/8	F14-UT-F14-F14-	44.7	25.9	31.8	34.9	18.3
1	F16-UT-F16-F16-	49.0	31.2	38.1	34.9	22.4
1 1/8	F18-UT-F18-F18-	55.1	31.2	46.0	42.9	24.6
1 1/4	F20-UT-F20-F20-	66.5	41.1	47.6	42.9	27.7
1 1/2	F24-UT-F24-F24-	78.0	50.0	57.2	50.8	34.0

Metric Tube

T-Tube O.D. (mm)	Basic Ordering Number	Dimension, mm				
		L	C	G	F	E
2	M2-UT-M2-M2-	22.3	12.9	12	9.5	1.7
3	M3-UT-M3-M3-	22.3	12.9	12	9.5	2.4
4	M4-UT-M4-M4-	25.4	13.7	12	12.7	2.4
6	M6-UT-M6-M6-	27.0	15.3	14	12.7	4.8
8	M8-UT-M8-M8-	29.9	16.2	16	15.9	6.4
10	M10-UT-M10-M10-	31.5	17.2	19	17.5	7.9
12	M12-UT-M12-M12-	36.0	22.8	22	20.6	9.5
14	M14-UT-M14-M14-	38.8	24.4	25	25.4	11.1
15	M15-UT-M15-M15-	38.8	24.4	25	25.4	11.9
16	M16-UT-M16-M16-	38.8	24.4	25	25.4	12.7
18	M18-UT-M18-M18-	38.8	24.4	30	27.0	15.1
20	M20-UT-M20-M20-	44.6	26.0	32	34.9	15.9
22	M22-UT-M22-M22-	44.6	26.0	32	34.9	18.3
25	M25-UT-M25-M25-	49.1	31.3	38	34.9	21.8
28	M28-UT-M28-M28-	64.0	36.6	46	42.9	21.8
30	M30-UT-M30-M30-	69.9	39.6	50	42.9	26.2
32	M32-UT-M32-M32-	72.3	42.0	50	42.9	28.6
38	M38-UT-M38-M38-	84.0	49.4	60	50.8	33.7


Reducing Union Tees

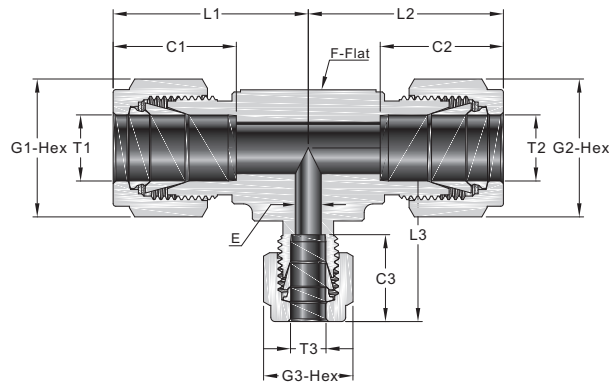

Fractional Tube

T1-Tube O.D. (in.)	T2-Tube O.D. (in.)	T3-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm										
				L1	L2	L3	C1	C2	C3	G1	G2	G3	F	E
1/4	1/4	1/8	F4-UT-F4-F2-	26.7	26.7	24.4	15.2	15.2	12.7	14.3	14.3	11.1	12.7	2.3
3/8	1/4	1/4	F6-UT-F4-F4-	30.5	29.0	29.0	16.8	15.2	15.2	17.5	14.3	14.3	15.9	4.8
3/8	1/4	3/8	F6-UT-F4-F6-	30.5	29.0	30.5	16.8	15.2	16.8	17.5	14.3	17.5	15.9	4.8
3/8	3/8	1/4	F6-UT-F6-F4-	30.5	30.5	29.0	16.8	16.8	15.2	17.5	17.5	14.3	15.9	4.8
1/2	1/4	1/4	F8-UT-F4-F4-	36.1	31.8	31.8	22.9	15.2	15.2	22.2	14.3	14.3	20.6	4.8
1/2	1/4	1/2	F8-UT-F4-F8-	36.1	31.8	36.1	22.9	15.2	22.9	22.2	14.3	22.2	20.6	4.8
1/2	3/8	3/8	F8-UT-F6-F6-	36.1	33.3	33.3	22.9	16.8	16.8	22.2	17.5	17.5	20.6	7.1
1/2	3/8	1/2	F8-UT-F6-F8-	36.1	33.3	36.1	22.9	16.8	22.9	22.2	17.5	22.2	20.6	7.1
1/2	1/2	1/4	F8-UT-F8-F4-	36.1	36.1	31.8	22.9	22.9	15.2	22.2	22.2	14.3	20.6	4.8
1/2	1/2	3/8	F8-UT-F8-F6-	36.1	36.1	33.3	22.9	22.9	16.8	22.2	22.2	17.5	20.6	7.1
5/8	3/8	3/8	F10-UT-F6-F6-	38.9	36.1	36.1	24.4	16.8	16.8	25.4	17.5	17.5	25.4	7.1
5/8	3/8	1/2	F10-UT-F6-F8-	38.9	36.1	38.9	24.4	16.8	22.9	25.4	17.5	22.2	25.4	7.1
5/8	1/2	3/8	F10-UT-F8-F6-	38.9	38.9	36.1	24.4	22.9	16.8	25.4	22.2	17.5	25.4	7.1
5/8	1/2	1/2	F10-UT-F8-F8-	38.9	38.9	38.9	24.4	22.9	22.9	25.4	22.2	22.2	25.4	10.4
5/8	5/8	3/8	F10-UT-F10-F6-	38.9	38.9	36.1	24.4	24.4	16.8	25.4	25.4	17.5	25.4	7.1
5/8	5/8	1/2	F10-UT-F10-F8-	38.9	38.9	38.9	24.4	24.4	22.9	25.4	25.4	22.2	25.4	10.4
3/4	3/8	3/8	F12-UT-F6-F6-	39.6	36.9	36.9	24.4	16.8	16.8	28.6	17.5	17.5	27.0	7.1
3/4	1/2	3/8	F12-UT-F8-F6-	39.6	39.6	36.9	24.4	22.9	16.8	28.6	22.2	17.5	27.0	7.1
3/4	1/2	1/2	F12-UT-F8-F8-	39.6	39.6	39.6	24.4	22.9	22.9	28.6	22.2	22.2	27.0	10.4
3/4	5/8	3/8	F12-UT-F10-F6-	39.6	39.6	36.9	24.4	24.4	16.8	28.6	25.4	17.5	27.0	7.1
3/4	5/8	1/2	F12-UT-F10-F8-	39.6	39.6	39.6	24.4	24.4	22.9	28.6	25.4	22.2	27.0	10.4
3/4	5/8	5/8	F12-UT-F10-F10-	39.6	39.6	39.6	24.4	24.4	24.4	28.6	25.4	25.4	27.0	12.7
3/4	3/4	1/4	F12-UT-F12-F4-	39.6	39.6	35.1	24.4	24.4	15.2	28.6	28.6	14.3	27.0	4.8
3/4	3/4	3/8	F12-UT-F12-F6-	39.6	39.6	36.9	24.4	24.4	16.8	28.6	28.6	17.5	27.0	7.1
3/4	3/4	1/2	F12-UT-F12-F8-	39.6	39.6	39.6	24.4	24.4	22.9	28.6	28.6	22.2	27.0	10.4
3/4	3/4	5/8	F12-UT-F12-F10-	39.6	39.6	39.6	24.4	24.4	24.4	28.6	28.6	25.4	27.0	12.7
7/8	1/2	3/4	F14-UT-F8-F12-	44.7	44.7	44.7	25.9	22.9	24.4	31.8	22.2	28.6	34.9	10.4
7/8	5/8	3/8	F14-UT-F10-F6-	44.7	44.7	41.9	25.9	24.4	16.8	31.8	25.4	17.5	34.9	7.1
7/8	3/4	3/8	F14-UT-F12-F6-	44.7	44.7	41.9	25.9	24.4	16.8	31.8	28.6	17.5	34.9	7.1
7/8	3/4	1/2	F14-UT-F12-F8-	44.7	44.7	44.7	25.9	24.4	22.9	31.8	28.6	22.2	34.9	10.4
7/8	3/4	3/4	F14-UT-F12-F12-	44.7	44.7	44.7	25.9	24.4	24.4	31.8	28.6	28.6	34.9	15.7
7/8	7/8	1/4	F14-UT-F14-F4-	44.7	44.7	40.4	25.9	25.9	15.2	31.8	31.8	14.3	34.9	4.8
7/8	7/8	3/8	F14-UT-F14-F6-	44.7	44.7	41.9	25.9	25.9	16.8	31.8	31.8	17.5	34.9	7.1
1	3/8	3/8	F16-UT-F6-F6-	49.3	41.9	41.9	31.2	16.8	16.8	38.1	17.5	17.5	34.9	7.1
1	1/2	1/4	F16-UT-F8-F4-	49.3	44.7	40.4	31.2	22.9	15.2	38.1	22.2	14.3	34.9	4.8
1	1/2	3/8	F16-UT-F8-F6-	49.3	44.7	41.9	31.2	22.9	16.8	38.1	22.2	17.5	34.9	7.1
1	1/2	1/2	F16-UT-F8-F8-	49.3	44.7	44.7	31.2	22.9	22.9	38.1	22.2	22.2	34.9	10.4
1	1/2	1	F16-UT-F8-F16-	49.3	44.7	49.3	31.2	22.9	31.2	38.1	22.2	38.1	34.9	10.4
1	5/8	3/8	F16-UT-F10-F6-	49.3	44.7	41.9	31.2	24.4	16.8	38.1	25.4	17.5	34.9	7.1
1	3/4	3/8	F16-UT-F12-F6-	49.3	44.7	41.9	31.2	24.4	16.8	38.1	28.6	17.5	34.9	7.1
1	3/4	1/2	F16-UT-F12-F8-	49.3	44.7	44.7	31.2	24.4	22.9	38.1	28.6	22.2	34.9	10.4
1	3/4	5/8	F16-UT-F12-F10-	49.3	44.7	44.7	31.2	24.4	24.4	38.1	28.6	25.4	34.9	12.7
1	3/4	1	F16-UT-F12-F16-	49.3	44.7	49.3	31.2	24.4	31.2	38.1	28.6	38.1	34.9	15.7
1	7/8	1/4	F16-UT-F14-F4-	49.3	44.7	40.4	31.2	25.9	15.2	38.1	31.8	14.3	34.9	4.8
1	7/8	3/8	F16-UT-F14-F6-	49.3	44.7	41.9	31.2	25.9	16.8	38.1	31.8	17.5	34.9	7.1
1	7/8	1/2	F16-UT-F14-F8-	49.3	44.7	44.7	31.2	25.9	22.9	38.1	31.8	22.2	34.9	10.4
1	7/8	3/4	F16-UT-F14-F12-	49.3	44.7	44.7	31.2	25.9	24.4	38.1	31.8	28.6	34.9	12.7
1	7/8	7/8	F16-UT-F14-F14-	49.3	44.7	44.7	31.2	25.9	25.9	38.1	31.8	31.8	34.9	18.3
1	1	1/4	F16-UT-F16-F4-	49.3	49.3	40.4	31.2	31.2	15.2	38.1	38.1	14.3	34.9	4.8
1	1	3/8	F16-UT-F16-F6-	49.3	49.3	41.9	31.2	31.2	16.8	38.1	38.1	17.5	34.9	7.1
1	1	1/2	F16-UT-F16-F8-	49.3	49.3	44.7	31.2	31.2	22.9	38.1	38.1	22.2	34.9	10.4
1	1	5/8	F16-UT-F16-F10-	49.3	49.3	44.7	31.2	31.2	24.4	38.1	38.1	25.4	34.9	12.7
1	1	3/4	F16-UT-F16-F12-	49.3	49.3	44.7	31.2	31.2	24.4	38.1	38.1	28.6	34.9	15.7
1	1	7/8	F16-UT-F16-F14-	49.3	49.3	44.7	31.2	31.2	25.9	38.1	38.1	31.8	34.9	18.3
1 1/4	1 1/4	1	F20-UT-F20-F16-	67.8	67.8	55.1	41.2	41.2	31.3	47.6	47.6	38.1	42.9	22.4
1 1/2	1 1/2	1	F24-UT-F24-F16-	78.7	78.7	60.0	50.0	50.0	31.3	57.2	57.2	38.1	50.8	22.4


Reducing Union Tees

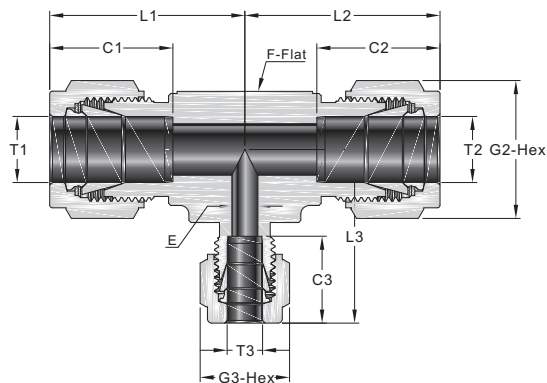

Metric Tube

T1-Tube O.D. (mm)	T2-Tube O.D. (mm)	T3-Tube O.D. (mm)	Basic Ordering Number	Dimension, mm										
				L1	L2	L3	C1	C2	C3	G1	G2	G3	F	E
3	3	6	M3-UT-M3-M6-	24.7	24.7	27.0	12.9	12.9	15.3	12	12	14	12.7	2.4
6	6	3	M6-UT-M6-M3-	27.0	27.0	25.4	15.3	15.3	12.9	14	14	12	12.7	2.4
6	6	8	M6-UT-M6-M8-	28.0	28.0	28.8	15.3	15.3	16.2	14	14	16	14.3	4.8
8	8	6	M8-UT-M8-M6-	30.0	30.0	29.0	16.2	16.2	15.3	16	16	14	15.9	4.8
8	8	12	M8-UT-M8-M12-	35.2	35.2	36.0	16.2	16.2	22.8	16	16	22	20.6	6.4
10	10	6	M10-UT-M10-M6-	31.5	31.5	29.9	17.2	17.2	15.3	19	19	14	17.5	4.8
10	10	8	M10-UT-M10-M8-	31.5	31.5	30.7	17.2	17.2	16.2	19	19	16	17.5	6.4
12	12	6	M12-UT-M12-M6-	36.0	36.0	31.8	22.8	22.8	15.3	22	22	14	20.6	4.8
12	12	8	M12-UT-M12-M8-	36.0	36.0	35.2	22.8	22.8	16.2	22	22	16	20.6	6.4
12	12	14	M12-UT-M12-M14-	38.0	38.0	38.0	22.8	22.8	24.4	22	22	25	25.4	9.5
12	12	18	M12-UT-M12-M18-	39.8	39.8	39.8	22.8	22.8	24.4	22	22	30	27.0	9.5
14	14	8	M14-UT-M14-M8-	38.0	38.0	37.2	24.4	24.4	16.2	25	25	16	25.4	6.4
14	14	10	M14-UT-M14-M10-	38.0	38.0	38.0	24.4	24.4	17.2	25	25	19	25.4	7.9
15	15	12	M15-UT-M15-M12-	38.8	38.8	38.8	24.4	24.4	22.8	25	25	22	25.4	9.5
16	16	8	M16-UT-M16-M8-	38.8	37.2	38.8	24.4	16.2	24.4	25	16	25	25.4	6.4
16	16	12	M16-UT-M16-M12-	38.8	38.8	38.9	24.4	24.4	22.8	25	25	22	25.4	9.5
18	18	8	M18-UT-M18-M8-	39.8	39.8	39.0	24.4	24.4	16.2	30	30	16	27.0	6.4
18	18	10	M18-UT-M18-M10-	39.8	39.8	39.8	24.4	24.4	17.2	30	30	19	27.0	7.9
18	18	12	M18-UT-M18-M12-	39.8	39.8	39.8	24.4	24.4	22.8	30	30	22	27.0	9.5
18	18	14	M18-UT-M18-M14-	39.8	39.8	39.8	24.4	24.4	24.4	30	30	25	27.0	11.1
20	20	14	M20-UT-M20-M14-	44.6	44.6	44.6	26.0	26.0	24.4	32	32	25	34.9	11.1
22	22	12	M22-UT-M22-M12-	44.6	44.6	44.6	26.0	26.0	22.8	32	32	22	34.9	9.5
25	25	12	M25-UT-M25-M12-	49.1	49.1	44.7	31.3	31.3	22.8	38	38	22	34.9	9.5

Union Crosses

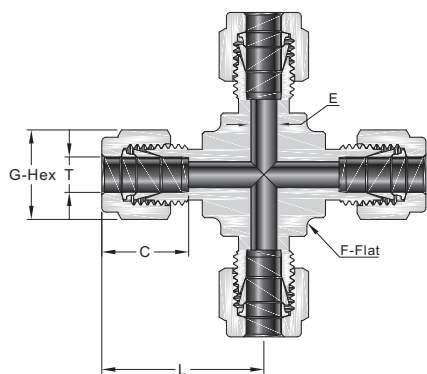


Fractional Tube

T-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm				
		L	C	G	F	E
1/8	F2-UC-F2-F2-F2-	22.4	12.7	11.1	9.5	2.3
3/16	F3-UC-F3-F3-F3-	24.4	13.7	12.7	11.1	3.0
1/4	F4-UC-F4-F4-F4-	26.9	15.2	14.3	12.7	4.8
5/16	F5-UC-F5-F5-F5-	29.7	16.2	15.9	15.9	6.4
3/8	F6-UC-F6-F6-F6-	30.5	16.8	17.5	15.9	7.1
1/2	F8-UC-F8-F8-F8-	36.1	22.9	22.2	20.6	10.4
5/8	F10-UC-F10-F10-F10-	36.3	24.4	25.4	27.0	12.7
3/4	F12-UC-F12-F12-F12-	39.9	24.4	28.6	27.0	15.7
7/8	F14-UC-F14-F14-F14-	44.7	25.9	31.8	34.9	18.3
1	F16-UC-F16-F16-F16-	49.0	31.2	38.1	34.9	22.4

Metric Tube

T-Tube O.D. (mm)	Basic Ordering Number	Dimension, mm				
		L	C	G	F	E
3	M3-UC-M3-M3-M3-	22.3	12.9	12	9.5	2.4
4	M4-UC-M4-M4-M4-	25.4	13.7	12	12.7	2.4
6	M6-UC-M6-M6-M6-	27.0	15.3	14	12.7	4.8
8	M8-UC-M8-M8-M8-	29.9	16.2	16	15.9	6.4
10	M10-UC-M10-M10-M10-	33.5	17.2	19	20.6	7.9
12	M12-UC-M12-M12-M12-	36.0	22.8	22	20.6	9.5
16	M16-UC-M16-M16-M16-	37.0	24.4	25	23.8	12.7
18	M18-UC-M18-M18-M18-	38.3	24.4	30	27.0	15.1
20	M20-UC-M20-M20-M20-	44.6	26.0	32	34.9	15.9
22	M22-UC-M22-M22-M22-	44.7	26.0	32	34.9	18.3
25	M25-UC-M25-M25-M25-	49.2	31.3	38	34.9	21.8

Caps




Fractional Tube

T-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm			
		L	C	G	F
1/16	CA-F1-	15.0	8.6	7.9	7.9
1/8	CA-F2-	20.1	12.7	11.1	11.1
3/16	CA-F3-	21.3	13.7	12.7	11.1
1/4	CA-F4-	23.4	15.2	14.3	12.7
5/16	CA-F5-	24.4	16.3	15.9	14.3
3/8	CA-F6-	25.7	16.8	17.5	15.9
1/2	CA-F8-	29.2	22.9	22.2	20.6
5/8	CA-F10-	30.0	24.4	25.4	23.8
3/4	CA-F12-	31.5	24.4	28.6	27.0
7/8	CA-F14-	34.0	25.9	31.8	30.2
1	CA-F16-	38.4	31.2	38.1	34.9
1 1/8	CA-F18-	38.4	31.2	46.0	41.3
1 1/4	CA-F20-	53.3	41.1	47.6	44.5
1 1/2	CA-F24-	64.5	50.0	57.2	54.0

Metric Tube

T-Tube O.D. (mm)	Basic Ordering Number	Dimension, mm			
		L	C	G	F
2	CA-M2-	20.1	12.9	12	12
3	CA-M3-	20.1	12.9	12	12
4	CA-M4-	21.3	13.7	12	12
6	CA-M6-	23.1	15.3	14	14
8	CA-M8-	24.5	16.2	16	15
10	CA-M10-	26.6	17.2	19	18
12	CA-M12-	29.1	22.8	22	22
14	CA-M14-	29.9	24.4	25	24
15	CA-M15-	29.9	24.4	25	24
16	CA-M16-	29.9	24.4	25	24
18	CA-M18-	31.4	24.4	30	27
20	CA-M20-	34.0	26.0	32	30
22	CA-M22-	34.0	26.0	32	30
25	CA-M25-	38.5	31.3	38	35
28	CA-M28-	48.5	36.6	46	41
30	CA-M30-	53.4	39.6	50	46
32	CA-M32-	55.8	42.0	50	46
38	CA-M38-	65.4	49.4	60	55

Plugs




Fractional Tube

T-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm
		G
1/16	PL-F1-	7.9
1/8	PL-F2-	11.1
3/16	PL-F3-	12.7
1/4	PL-F4-	14.3
5/16	PL-F5-	15.9
3/8	PL-F6-	17.5
1/2	PL-F8-	22.2
5/8	PL-F10-	25.4
3/4	PL-F12-	28.6
7/8	PL-F14-	31.8
1	PL-F16-	38.1
1 1/4	PL-F20-	47.6
1 1/2	PL-F24-	57.2

Metric Tube

T-Tube O.D. (mm)	Basic Ordering Number	Dimension, mm
		G
2	PL-M2-	12
3	PL-M3-	12
4	PL-M4-	12
6	PL-M6-	14
8	PL-M8-	16
10	PL-M10-	19
12	PL-M12-	22
14	PL-M14-	25
15	PL-M15-	25
16	PL-M16-	25
18	PL-M18-	30
20	PL-M20-	32
22	PL-M22-	32
25	PL-M25-	38
28	PL-M28-	46
30	PL-M30-	50
32	PL-M32-	50
38	PL-M38-	60


Reducers

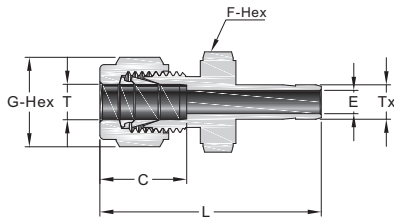

Metric Tube

T-Tube O.D. (mm)	Tx-Tube O.D. (mm)	Basic Ordering Number	Dimension, mm				
			L	C	G	F	E
2	3	M2-R-MT3-	33.5	12.9	12	12	1.7
3	4	M3-R-MT4-	35.0	12.9	12	12	2.4
3	6	M3-R-MT6-	36.1	12.9	12	12	2.4
3	10	M3-R-MT10-	38.4	12.9	12	14	2.4
4	6	M4-R-MT6-	37.1	13.7	12	12	2.4
6	3	M6-R-MT3-	36.9	15.3	14	14	1.9
6	8	M6-R-MT8-	39.9	15.3	14	14	4.8
6	10	M6-R-MT10-	40.7	15.3	14	14	4.8
6	12	M6-R-MT12-	46.3	15.3	14	14	4.8
6	18	M6-R-MT18-	49.6	15.3	14	22	4.8
8	6	M8-R-MT6-	40.3	16.2	16	15	4.1
8	10	M8-R-MT10-	42.0	16.2	16	15	6.4
8	12	M8-R-MT12-	47.6	16.2	16	15	6.4
10	6	M10-R-MT6-	42.4	17.2	19	18	4.1
10	8	M10-R-MT8-	43.4	17.2	19	18	5.6
10	12	M10-R-MT12-	49.8	17.2	19	18	7.9
10	15	M10-R-MT15-	51.3	17.2	19	18	7.9
10	18	M10-R-MT18-	51.3	17.2	19	22	7.9
12	6	M12-R-MT6-	44.9	22.8	22	22	4.1
12	8	M12-R-MT8-	45.9	22.8	22	22	5.6
12	10	M12-R-MT10-	46.7	22.8	22	22	7.1
12	16	M12-R-MT16-	53.8	22.8	22	22	9.5
12	18	M12-R-MT18-	53.8	22.8	22	22	9.5
12	20	M12-R-MT20-	56.1	22.8	22	22	9.5
12	22	M12-R-MT22-	56.1	22.8	22	24	9.5
12	25	M12-R-MT25-	62.4	22.8	22	27	9.5
16	12	M16-R-MT12-	53.0	24.4	25	24	8.8
18	12	M18-R-MT12-	54.6	24.4	30	27	8.8
18	16	M18-R-MT16-	56.1	24.4	30	27	12.0
18	20	M18-R-MT20-	57.6	24.4	30	27	15.1
18	22	M18-R-MT22-	57.6	24.4	30	27	15.1
18	25	M18-R-MT25-	62.4	24.4	30	27	15.1
20	16	M20-R-MT16-	57.9	26.0	32	30	12.0
20	18	M20-R-MT18-	57.9	26.0	32	30	13.9
20	22	M20-R-MT22-	59.4	26.0	32	30	15.9
20	25	M20-R-MT25-	64.2	26.0	32	30	15.8
22	18	M22-R-MT18-	57.9	26.0	32	30	13.9
22	20	M22-R-MT20-	59.4	26.0	32	30	15.5
22	25	M22-R-MT25-	64.2	26.0	32	30	18.3
25	18	M25-R-MT18-	63.1	31.3	38	35	13.9
25	20	M25-R-MT20-	64.6	31.3	38	35	15.5

Reducers

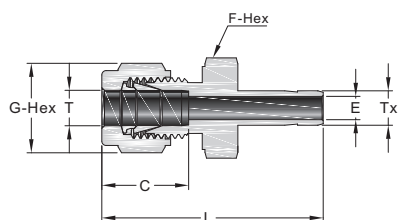


Metric Tube

Fractional Tube

T-Tube O.D. (mm)	Tx-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm				
			L	C	G	F	E
2	1/8	M2-R-FT2-	33.5	12.9	12	12	1.7
3	1/8	M3-R-FT2-	33.5	12.9	12	12	2.0
3	1/4	M3-R-FT4-	36.1	12.9	12	12	2.4
4	1/4	M4-R-FT4-	37.1	13.7	12	12	2.4
6	1/8	M6-R-FT2-	36.9	15.3	14	14	2.0
6	1/4	M6-R-FT4-	39.2	15.3	14	14	4.4
6	5/16	M6-R-FT5-	39.9	15.3	14	14	4.8
6	3/8	M6-R-FT6-	40.7	15.3	14	14	4.8
6	1/2	M6-R-FT8-	46.3	15.3	14	14	4.8
8	1/4	M8-R-FT4-	40.3	16.2	16	15	4.4
8	3/8	M8-R-FT6-	42.0	16.2	16	15	6.4
8	1/2	M8-R-FT8-	47.6	16.2	16	15	6.4
10	3/8	M10-R-FT6-	44.2	17.2	19	18	6.8
10	1/2	M10-R-FT8-	49.8	17.2	19	18	7.9
12	1/2	M12-R-FT8-	52.3	22.8	22	22	9.3
12	3/4	M12-R-FT12-	53.8	22.8	22	22	9.5
18	3/4	M18-R-FT12-	56.1	24.4	30	27	14.7
18	1	M18-R-FT16-	62.4	24.4	30	27	15.1
25	1	M25-R-FT16-	69.5	31.3	38	35	20.2

Port Connectors



1" /25 mm and below

Fractional Tube

T-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm			
		L	B	E	J
1/16	PC-F1-	13.7	10.7	0.8	3.3
1/8	PC-F2-	22.4	15.7	2.0	6.1
1/4	PC-F4-	24.6	18.8	4.3	9.4
5/16	PC-F5-	25.9	20.1	5.6	10.9
3/8	PC-F6-	26.2	20.3	6.9	12.7
1/2	PC-F8-	35.8	25.9	9.4	15.7
5/8	PC-F10-	37.8	28.1	11.9	20.5
3/4	PC-F12-	37.3	27.7	14.7	22.1
1	PC-F16-	48.0	34.5	20.3	28.4
1 1/4	PC-F20-	69.1	50.6	25.9	37.4
1 1/2	PC-F24-	84.1	59.4	31.8	45.8




1 1/4" /28 mm and above

Metric Tube

T-Tube O.D. (mm)	Basic Ordering Number	Dimension, mm			
		L	B	E	J
3	PC-M3-	22.2	15.7	1.9	6.0
6	PC-M6-	24.6	18.7	4.1	9.0
8	PC-M8-	25.9	20.0	5.6	11.0
10	PC-M10-	26.1	20.2	7.1	13.1
12	PC-M12-	35.8	26.0	8.8	15.0
15	PC-M15-	37.8	27.6	11.2	19.6
16	PC-M16-	37.8	27.6	12.0	20.6
18	PC-M18-	37.8	27.7	13.9	21.0
20	PC-M20-	39.4	29.2	15.5	24.6
25	PC-M25-	49.3	34.5	19.9	31.2
28	PC-M28-	63.5	48.3	22.5	34.4
30	PC-M30-	67.6	52.2	24.3	37.4
32	PC-M32-	69.7	52.4	26.5	39.4
38	PC-M38-	81.9	61.4	31.6	45.8

Reducing Port Connectors




Fractional Tube

T-Tube O.D. (in.)	Tx-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm				
			L	B	E	Bx	J
1/8	1/16	F2-PC-F1-	17.3	8.6	0.8	2.0	6.1
1/4	1/16	F4-PC-F1-	18.0	8.6	0.8	3.6	9.4
1/4	1/8	F4-PC-F2-	22.6	13.5	2.0	3.3	9.4
3/8	1/8	F6-PC-F2-	23.1	13.5	2.0	3.8	12.7
3/8	1/4	F6-PC-F4-	24.9	15.7	4.3	3.3	12.7
1/2	1/4	F8-PC-F4-	29.2	15.7	4.3	3.8	15.7
1/2	3/8	F8-PC-F6-	30.5	17.5	6.9	3.3	15.7
3/4	1/2	F12-PC-F8-	37.8	23.1	9.4	3.8	22.1
1	1/2	F16-PC-F8-	42.9	24.4	9.4	4.8	28.5
1	3/4	F16-PC-F12-	43.7	25.9	14.7	4.1	28.5

Metric Tube

T-Tube O.D. (mm)	Tx-Tube O.D. (mm)	Basic Ordering Number	Dimension, mm				
			L	B	E	Bx	J
6	3	M6-PC-M3-	22.6	13.5	1.9	3.2	9.0
8	6	M8-PC-M6-	24.7	15.7	4.1	3.1	11.0
10	6	M10-PC-M6-	25.0	15.7	4.1	3.4	13.1
10	8	M10-PC-M8-	26.3	17.0	5.6	3.1	13.1
12	6	M12-PC-M6-	29.6	15.7	4.1	3.6	15.0
12	8	M12-PC-M8-	29.8	16.8	5.6	3.4	15.0
12	10	M12-PC-M10-	30.4	17.5	7.1	3.1	15.0
16	12	M16-PC-M12-	36.2	23.1	8.8	3.4	19.0
28	25	M28-PC-M25-	56.5	33.0	19.8	8.2	34.3
32	25	M32-PC-M25-	60.3	33.0	19.8	9.9	39.5
38	25	M38-PC-M25-	65.8	33.0	19.8	12.3	47.1



Male Adapters




Fractional Tube

ISO Parallel Thread (BS)

T-Tube O.D. (in.)	P-BS Size	Basic Ordering Number	Dimension, in. (mm)				
			L	B	E	F	D
1/8	1/8	FT2-MA-MBS2-	1.22(31.0)	0.28(7.1)	0.08(2.0)	0.56(14.3)	0.54(13.7)
1/8	1/4	FT2-MA-MBS4-	1.41(35.8)	0.44(11.2)	0.08(2.0)	0.75(19.1)	0.70(17.8)
1/4	1/8	FT4-MA-MBS2-	1.31(33.3)	0.28(7.1)	0.16(4.1)	0.56(14.3)	0.54(13.7)
1/4	1/4	FT4-MA-MBS4-	1.50(38.1)	0.44(11.2)	0.17(4.3)	0.75(19.1)	0.70(17.8)
3/8	1/8	FT6-MA-MBS2-	1.34(34.0)	0.28(7.1)	0.05(1.3)	0.56(14.3)	0.54(13.7)
3/8	1/4	FT6-MA-MBS4-	1.57(39.9)	0.44(11.2)	0.23(5.8)	0.75(19.1)	0.70(17.8)
3/8	3/8	FT6-MA-MBS6-	1.60(40.6)	0.44(11.2)	0.27(6.9)	0.87(22.2)	0.85(21.6)
3/8	1/2	FT6-MA-MBS8-	1.69(42.9)	0.56(14.2)	0.28(7.1)	1.06(27.0)	1.02(25.9)
1/2	1/4	FT8-MA-MBS4-	1.79(45.5)	0.44(11.2)	0.23(5.8)	0.75(19.1)	0.70(17.8)
1/2	3/8	FT8-MA-MBS6-	1.82(46.2)	0.44(11.2)	0.31(7.9)	0.87(22.2)	0.85(21.6)
1/2	1/2	FT8-MA-MBS8-	1.94(49.2)	0.56(14.2)	0.37(9.4)	1.06(27.0)	1.02(25.9)
5/8	1/2	FT10-MA-MBS8-	1.97(50.0)	0.56(14.2)	0.47(11.9)	1.06(27.0)	1.02(25.9)
3/4	3/4	FT12-MA-MBS12-	2.16(54.9)	0.63(16.0)	0.58(14.7)	1.31(33.3)	1.26(32.0)
1	1	FT16-MA-MBS16-	2.54(64.5)	0.72(18.3)	0.80(20.3)	1.63(41.3)	1.53(38.9)





1" and below



1 1/4" and above

Adapt to straight thread boss of SAE J1926-1, ISO 11926-1 and MS 16142.

Male Adapters



Fractional Tube

ISO Parallel Thread (BP)

T-Tube O.D. (in.)	P-BP Size	Basic Ordering Number	Dimension, in. (mm)				
			L	B	E	F	D
1/8	1/8	FT2-MA-PMBP2-	1.09(27.7)	0.28(7.1)	0.05(1.3)	0.56(14.3)	0.54(13.7)
1/8	1/4	FT2-MA-PMBP4-	1.31(33.3)	0.44(11.2)	0.05(1.3)	0.75(19.1)	0.70(17.8)
1/4	1/8	FT4-MA-PMBP2-	1.19(30.2)	0.28(7.1)	0.16(4.1)	0.56(14.3)	0.54(13.7)
1/4	1/4	FT4-MA-PMBP4-	1.50(38.1)	0.44(11.2)	0.18(4.6)	0.75(19.1)	0.70(17.8)
3/8	1/8	FT6-MA-PMBP2-	1.34(34.0)	0.28(7.1)	0.05(1.3)	0.75(19.1)	0.54(13.7)
3/8	1/4	FT6-MA-PMBP4-	1.47(37.3)	0.44(11.2)	0.25(6.4)	0.75(19.1)	0.70(17.8)
3/8	3/8	FT6-MA-PMBP6-	1.50(38.1)	0.44(11.2)	0.28(7.1)	0.87(22.2)	0.85(21.6)
3/8	1/2	FT6-MA-PMBP8-	1.69(42.9)	0.56(14.2)	0.28(7.1)	1.06(27.0)	1.02(25.9)
1/2	1/4	FT8-MA-PMBP4-	1.69(42.9)	0.44(11.2)	0.25(6.4)	0.75(19.1)	0.70(17.8)
1/2	3/8	FT8-MA-PMBP6-	1.72(43.7)	0.44(11.2)	0.31(7.9)	0.87(22.2)	0.85(21.6)
1/2	1/2	FT8-MA-PMBP8-	1.94(49.3)	0.56(14.2)	0.39(9.9)	1.06(27.0)	1.02(25.9)
5/8	1/2	FT10-MA-PMBP8-	1.97(50.0)	0.56(14.2)	0.47(11.9)	1.06(27.0)	1.02(25.9)
3/4	3/4	FT12-MA-PMBP12-	2.09(53.1)	0.63(16.0)	0.58(14.7)	1.32(33.5)	1.26(32.0)
1	1	FT16-MA-PMBP16-	2.49(63.3)	0.72(18.3)	0.80(20.3)	1.63(41.3)	1.53(38.9)

Fractional Tube

SAE/MS Straight Thread

T-Tube O.D. (in.)	P-SAE/MS Thread Size	Basic Ordering Number	Dimension, in. (mm)			
			L	B	E	F
1/8	5/16-24	FT2-MA-OST5-	1.20(30.5)	0.30(7.6)	0.08(2.0)	0.44(11.1)
1/4	7/16-20	FT4-MA-OST7-	1.39(35.3)	0.36(9.1)	0.17(4.3)	0.56(14.3)
3/8	7/16-20	FT6-MA-OST7-	1.46(37.1)	0.36(9.1)	0.20(5.1)	0.56(14.3)
3/8	9/16-18	FT6-MA-OST9-	1.52(38.6)	0.39(9.9)	0.27(6.9)	0.69(17.5)
3/8	3/4-16	FT6-MA-OST12-	1.60(40.6)	0.44(11.2)	0.27(6.9)	0.87(22.2)
1/2	9/16-18	FT8-MA-OST9-	1.74(44.2)	0.39(9.9)	0.28(7.1)	0.69(17.5)
1/2	3/4-16	FT8-MA-OST12-	1.82(46.2)	0.44(11.2)	0.37(9.4)	0.87(22.2)
5/8	7/8-14	FT10-MA-OST14-	1.94(49.3)	0.50(12.7)	0.47(11.9)	1.00(25.4)
3/4	1 1/16-12	FT12-MA-OST17-	2.10(53.3)	0.59(15.0)	0.58(14.7)	1.25(31.8)
1	1 5/16-12	FT16-MA-OST21-	2.41(61.2)	0.59(15.0)	0.80(20.3)	1.50(38.1)
1 1/4	1 5/8-12	FT20-MA-OST26-	2.81(71.4)	0.59(15.0)	1.02(25.9)	1.87(47.6)
1 1/2	1 7/8-12	FT24-MA-OST30-	3.28(83.3)	0.59(15.0)	1.25(31.8)	2.13(54.0)

Fractional Tube

37° Flare (AN)


T-Tube O.D. (in.)	AN Tube Flare Size	Basic Ordering Number	Dimension, in. (mm)			
			L	B	E	F
1/4	1/4	FT4-MA-AN4-	1.46(37.1)	0.55(14.0)	0.17(4.3)	0.50(12.7)
3/8	1/4	FT6-MA-AN4-	1.53(38.9)	0.55(14.0)	0.17(4.3)	0.50(12.7)
3/8	3/8	FT6-MA-AN6-	1.56(39.6)	0.56(14.2)	0.27(6.9)	0.63(15.9)
1/2	1/2	FT8-MA-AN8-	1.91(48.5)	0.66(16.8)	0.37(9.4)	0.81(20.6)
3/4	3/4	FT12-MA-AN12-	2.21(56.1)	0.86(21.8)	0.58(14.7)	1.13(28.6)
1	1	FT16-MA-AN16-	2.58(65.5)	0.91(23.1)	0.80(20.3)	1.37(34.9)

Fractional Tube


O-Seal with SAE/MS Straight Thread

T-Tube O.D. (in.)	P-SAE/MS Thread Size	Basic Ordering Number	Dimension, in. (mm)			
			L	B	E	F
1/8	5/16-24	FT2-MA-STO5-	1.28(32.5)	0.34(8.6)	0.08(2.0)	0.56(14.3)
3/16	3/8-24	FT3-MA-STO6-	1.38(35.1)	0.38(9.7)	0.12(3.0)	0.63(15.9)
1/4	7/16-20	FT4-MA-STO7-	1.54(39.1)	0.41(10.4)	0.17(4.3)	0.75(19.1)
5/16	1/2-20	FT5-MA-STO8-	1.64(41.7)	0.44(11.2)	0.22(5.6)	0.87(22.2)
3/8	9/16-18	FT6-MA-STO9-	1.70(43.2)	0.47(11.9)	0.27(6.9)	0.94(23.8)
1/2	3/4-16	FT8-MA-STO12-	1.95(49.5)	0.47(11.9)	0.37(9.4)	1.13(28.6)

Male Adapters



1" and below



1 1/4" and above

Fractional Tube

NPT Thread


T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, in. (mm)			
			L	B	E	F
1/16	1/8	FT1-MA-NPT2-	1.00(25.4)	0.38(9.7)	0.03(0.8)	0.44(11.1)
1/8	1/8	FT2-MA-NPT2-	1.16(29.5)	0.38(9.7)	0.08(2.0)	0.44(11.1)
1/8	1/4	FT2-MA-NPT4-	1.37(34.8)	0.56(14.2)	0.08(2.0)	0.56(14.3)
3/16	1/8	FT3-MA-NPT2-	1.19(30.2)	0.38(9.7)	0.12(3.0)	0.44(11.1)
3/16	1/4	FT3-MA-NPT4-	1.40(35.6)	0.56(14.2)	0.12(3.0)	0.56(14.3)
1/4	1/8	FT4-MA-NPT2-	1.25(31.8)	0.38(9.7)	0.17(4.3)	0.44(11.1)
1/4	1/4	FT4-MA-NPT4-	1.46(37.1)	0.56(14.2)	0.17(4.3)	0.56(14.3)
1/4	3/8	FT4-MA-NPT6-	1.49(37.8)	0.56(14.2)	0.17(4.3)	0.69(17.5)
1/4	1/2	FT4-MA-NPT8-	1.71(43.4)	0.75(19.1)	0.17(4.3)	0.87(22.2)
5/16	1/8	FT5-MA-NPT2-	1.29(32.8)	0.38(9.7)	0.19(4.8)	0.44(11.1)
5/16	1/4	FT5-MA-NPT4-	1.50(38.1)	0.56(14.2)	0.22(5.6)	0.56(14.3)
5/16	3/8	FT5-MA-NPT6-	1.53(38.9)	0.56(14.2)	0.22(5.6)	0.69(17.5)
5/16	1/2	FT5-MA-NPT8-	1.74(44.2)	0.75(19.1)	0.22(5.6)	0.87(22.2)
3/8	1/8	FT6-MA-NPT2-	1.32(33.5)	0.38(9.7)	0.19(4.8)	0.44(11.1)
3/8	1/4	FT6-MA-NPT4-	1.53(38.9)	0.56(14.2)	0.27(6.9)	0.56(14.3)
3/8	3/8	FT6-MA-NPT6-	1.56(39.6)	0.56(14.2)	0.27(6.9)	0.69(17.5)
3/8	1/2	FT6-MA-NPT8-	1.78(45.2)	0.75(19.1)	0.27(6.9)	0.87(22.2)
1/2	1/4	FT8-MA-NPT4-	1.75(44.5)	0.56(14.2)	0.28(7.1)	0.56(14.3)
1/2	3/8	FT8-MA-NPT6-	1.78(45.2)	0.56(14.2)	0.37(9.4)	0.69(17.5)
1/2	1/2	FT8-MA-NPT8-	2.00(50.8)	0.75(19.1)	0.37(9.4)	0.87(22.2)
5/8	1/2	FT10-MA-NPT8-	2.06(52.3)	0.75(19.1)	0.47(11.9)	0.87(22.2)
3/4	1/2	FT12-MA-NPT8-	2.06(52.3)	0.75(19.1)	0.47(11.9)	0.87(22.2)
3/4	3/4	FT12-MA-NPT12-	2.06(52.3)	0.75(19.1)	0.58(14.7)	1.06(27.0)
3/4	1	FT12-MA-NPT16-	2.41(61.2)	0.94(23.9)	0.81(20.7)	1.37(34.9)
1	3/4	FT16-MA-NPT12-	2.31(58.7)	0.75(19.1)	0.62(15.7)	1.06(27.0)
1	1	FT16-MA-NPT16-	2.60(66.0)	0.94(23.9)	0.80(20.3)	1.37(34.9)
1 1/4	1 1/4	FT20-MA-NPT20-	3.16(80.3)	0.94(23.9)	1.02(25.9)	1.75(44.5)
1 1/2	1 1/2	FT24-MA-NPT24-	3.72(94.5)	1.03(26.2)	1.25(31.8)	2.13(54.0)

Fractional Tube

ISO Tapered Thread (BSPT)

T-Tube O.D. (in.)	P-BSPT Size	Basic Ordering Number	Dimension, in. (mm)			
			L	B	E	F
1/8	1/8	FT2-MA-MBT2-	1.16(29.5)	0.38(9.7)	0.08(2.0)	0.44(11.1)
1/8	1/4	FT2-MA-MBT4-	1.37(34.8)	0.56(14.2)	0.08(2.0)	0.56(14.3)
1/4	1/8	FT4-MA-MBT2-	1.25(31.8)	0.38(9.7)	0.17(4.3)	0.44(11.1)
1/4	1/4	FT4-MA-MBT4-	1.46(37.1)	0.56(14.2)	0.17(4.3)	0.56(14.3)
1/4	3/8	FT4-MA-MBT6-	1.49(37.8)	0.56(14.2)	0.17(4.3)	0.69(17.5)
1/4	1/2	FT4-MA-MBT8-	1.71(43.4)	0.75(19.1)	0.17(4.3)	0.87(22.2)
5/16	1/8	FT5-MA-MBT2-	1.29(32.8)	0.38(9.7)	0.19(4.8)	0.44(11.1)
5/16	1/4	FT5-MA-MBT4-	1.50(38.1)	0.56(14.2)	0.22(5.6)	0.56(14.3)
3/8	1/4	FT6-MA-MBT4-	1.53(38.9)	0.56(14.2)	0.27(6.9)	0.56(14.3)
3/8	3/8	FT6-MA-MBT6-	1.56(39.6)	0.56(14.2)	0.27(6.9)	0.69(17.5)
3/8	1/2	FT6-MA-MBT8-	1.78(45.2)	0.75(19.1)	0.27(6.9)	0.87(22.2)
1/2	1/4	FT8-MA-MBT4-	1.75(44.5)	0.56(14.2)	0.28(7.1)	0.56(14.3)
1/2	3/8	FT8-MA-MBT6-	1.78(45.2)	0.56(14.2)	0.37(9.4)	0.69(17.5)
1/2	1/2	FT8-MA-MBT8-	2.00(50.8)	0.75(19.1)	0.37(9.4)	0.87(22.2)
5/8	3/8	FT10-MA-MBT6-	1.91(48.5)	0.56(14.2)	0.37(9.5)	0.69(17.5)
5/8	1/2	FT10-MA-MBT8-	2.06(52.3)	0.75(19.1)	0.47(11.9)	0.87(22.2)
3/4	3/4	FT12-MA-MBT12-	2.06(52.3)	0.75(19.1)	0.58(14.7)	1.06(27.0)
1	1	FT16-MA-MBT16-	2.60(66.0)	0.94(23.9)	0.80(20.3)	1.37(34.9)

Male Adapters



25 mm and below



28 mm and above

Metric Tube

NPT Thread


T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, in. (mm)			
			L	B	E	F
3	1/8	MT3-MA-NPT2-	29.4(1.16)	9.7(0.38)	1.8(0.07)	12.0(0.47)
4	1/8	MT4-MA-NPT2-	29.4(1.16)	9.7(0.38)	2.0(0.08)	12.0(0.47)
6	1/8	MT6-MA-NPT2-	32.8(1.29)	9.7(0.38)	4.1(0.16)	12.0(0.47)
6	1/4	MT6-MA-NPT4-	38.1(1.50)	14.2(0.56)	4.1(0.16)	14.0(0.55)
6	3/8	MT6-MA-NPT6-	39.2(1.54)	14.2(0.56)	4.1(0.16)	18.0(0.71)
6	1/2	MT6-MA-NPT8-	42.1(1.66)	19.1(0.75)	4.1(0.16)	22.0(0.87)
8	1/4	MT8-MA-NPT4-	39.1(1.54)	14.2(0.56)	5.6(0.22)	14.0(0.55)
8	3/8	MT8-MA-NPT6-	39.9(1.57)	14.2(0.56)	5.6(0.22)	19.0(0.75)
10	1/4	MT10-MA-NPT4-	39.9(1.57)	14.2(0.56)	7.1(0.28)	14.0(0.55)
10	3/8	MT10-MA-NPT6-	40.6(1.60)	14.2(0.56)	7.1(0.28)	18.0(0.71)
10	1/2	MT10-MA-NPT8-	46.2(1.82)	19.1(0.75)	7.1(0.28)	22.0(0.87)
12	1/4	MT12-MA-NPT4-	46.5(1.83)	14.2(0.56)	7.1(0.28)	14.0(0.55)
12	3/8	MT12-MA-NPT6-	46.2(1.82)	14.2(0.56)	8.8(0.35)	18.0(0.71)
12	1/2	MT12-MA-NPT8-	52.1(2.05)	19.1(0.75)	8.8(0.35)	22.0(0.87)
16	1/2	MT16-MA-NPT8-	50.8(2.00)	19.1(0.75)	12.7(0.50)	22.0(0.87)
16	3/4	MT16-MA-NPT12-	51.6(2.03)	19.1(0.75)	12.7(0.50)	27.0(1.06)
18	1/2	MT18-MA-NPT8-	50.8(2.00)	19.1(0.75)	12.7(0.50)	27.0(1.06)
18	3/4	MT18-MA-NPT12-	51.6(2.03)	19.1(0.75)	14.0(0.55)	27.0(1.06)
20	1/2	MT20-MA-NPT8-	51.8(2.04)	19.1(0.75)	11.9(0.47)	22.0(0.87)
20	3/4	MT20-MA-NPT12-	52.4(2.06)	19.1(0.75)	15.1(0.59)	27.0(1.06)
25	1	MT25-MA-NPT16-	65.9(2.59)	23.9(0.94)	19.8(0.78)	35.0(1.38)
28	1	MT28-MA-NPT16-	74.4(2.93)	23.9(0.94)	22.2(0.87)	35.0(1.38)
28	1 1/4	MT28-MA-NPT20-	76.2(3.00)	23.9(0.94)	22.5(0.89)	46.0(1.81)
30	1	MT30-MA-NPT16-	79.2(3.12)	23.9(0.94)	22.2(0.87)	41.0(1.61)
30	1 1/4	MT30-MA-NPT20-	80.0(3.15)	23.9(0.94)	24.3(0.96)	46.0(1.81)
32	1 1/4	MT32-MA-NPT20-	81.0(3.19)	23.9(0.94)	26.5(1.04)	46.0(1.81)
38	1 1/2	MT38-MA-NPT24-	92.2(3.63)	26.2(1.03)	31.6(1.24)	55.0(2.17)

Metric Tube


ISO Tapered Thread (BSPT)

T-Tube O.D. (mm)	P-BSPT Size	Basic Ordering Number	Dimension, in. (mm)			
			L	B	E	F
3	1/8	MT3-MA-MBT2-	29.4(1.16)	9.7(0.38)	1.8(0.07)	12.0(0.47)
4	1/8	MT4-MA-MBT2-	29.4(1.16)	9.7(0.38)	2.0(0.08)	12.0(0.47)
6	1/8	MT6-MA-MBT2-	32.8(1.29)	9.7(0.38)	4.1(0.16)	12.0(0.47)
6	1/4	MT6-MA-MBT4-	38.1(1.50)	14.2(0.56)	4.1(0.16)	14.0(0.55)
8	1/4	MT8-MA-MBT4-	39.1(1.54)	14.2(0.56)	5.6(0.22)	14.0(0.55)
8	3/8	MT8-MA-MBT6-	39.9(1.57)	14.2(0.56)	5.6(0.22)	18.0(0.71)
10	1/4	MT10-MA-MBT4-	39.9(1.57)	14.2(0.56)	7.1(0.28)	14.0(0.55)
10	3/8	MT10-MA-MBT6-	40.6(1.60)	14.2(0.56)	7.1(0.28)	18.0(0.71)
10	1/2	MT10-MA-MBT8-	44.5(1.75)	19.1(0.75)	7.5(0.30)	22.0(0.87)
12	1/4	MT12-MA-MBT4-	46.5(1.83)	14.2(0.56)	7.1(0.28)	16.0(0.63)
12	3/8	MT12-MA-MBT6-	46.2(1.82)	14.2(0.56)	8.8(0.35)	18.0(0.71)
12	1/2	MT12-MA-MBT8-	51.8(2.04)	19.1(0.75)	8.8(0.35)	22.0(0.87)
16	1/2	MT16-MA-MBT8-	50.8(2.00)	19.1(0.75)	12.7(0.50)	22.0(0.87)
18	3/4	MT18-MA-MBT12-	51.6(2.03)	19.1(0.75)	14.0(0.55)	27.0(1.06)
20	3/4	MT20-MA-MBT12-	52.4(2.06)	19.1(0.75)	15.1(0.59)	27.0(1.06)
25	1	MT25-MA-MBT16-	65.9(2.59)	23.9(0.94)	19.8(0.78)	35.0(1.38)
28	1	MT28-MA-MBT16-	74.7(2.94)	23.9(0.94)	22.2(0.87)	35.0(1.38)
28	1 1/4	MT28-MA-MBT20-	76.2(3.00)	23.9(0.94)	22.5(0.89)	46.0(1.81)
30	1 1/4	MT30-MA-MBT20-	80.0(3.15)	23.9(0.94)	24.3(0.96)	46.0(1.81)
32	1 1/4	MT32-MA-MBT20-	81.0(3.19)	23.9(0.94)	26.5(1.04)	46.0(1.81)
38	1 1/2	MT38-MA-MBT24-	92.2(3.63)	26.2(1.03)	31.6(1.24)	55.0(2.17)

Male Adapters



25 mm and below



28 mm and above

Metric Tube


ISO Parallel Thread (BS)

T-Tube O.D. (mm)	P-BS Size	Basic Ordering Number	Dimension, in. (mm)				
			L	B	E	F	D
3	1/8	MT3-MA-MBS2-	31.0(1.22)	7.1(0.28)	1.8(0.07)	14.0(0.55)	13.7(0.54)
4	1/8	MT4-MA-MBS2-	31.8(1.25)	7.1(0.28)	2.0(0.08)	14.0(0.55)	13.7(0.54)
6	1/8	MT6-MA-MBS2-	34.3(1.35)	7.1(0.28)	4.0(0.16)	14.0(0.55)	13.7(0.54)
6	1/4	MT6-MA-MBS4-	39.1(1.54)	11.2(0.44)	4.1(0.16)	19.0(0.75)	17.8(0.70)
8	1/4	MT8-MA-MBS4-	40.1(1.58)	11.2(0.44)	5.6(0.22)	19.0(0.75)	17.8(0.70)
10	1/4	MT10-MA-MBS4-	40.9(1.61)	11.2(0.44)	5.9(0.23)	19.0(0.75)	17.8(0.70)
10	3/8	MT10-MA-MBS6-	41.7(1.64)	11.2(0.44)	7.1(0.28)	22.0(0.87)	21.6(0.85)
10	1/2	MT10-MA-MBS8-	44.7(1.76)	14.2(0.56)	7.1(0.28)	27.0(1.06)	25.9(1.02)
12	1/4	MT12-MA-MBS4-	46.7(1.84)	11.2(0.44)	5.9(0.23)	19.0(0.75)	17.8(0.70)
12	3/8	MT12-MA-MBS6-	47.2(1.86)	11.2(0.44)	7.9(0.31)	22.0(0.87)	21.6(0.85)
12	1/2	MT12-MA-MBS8-	50.5(1.99)	14.2(0.56)	8.8(0.35)	27.0(1.06)	25.9(1.02)
16	1/2	MT16-MA-MBS8-	50.8(2.00)	14.2(0.56)	11.9(0.47)	27.0(1.06)	25.9(1.02)
18	3/4	MT18-MA-MBS12-	55.9(2.20)	16.0(0.63)	13.9(0.55)	35.0(1.38)	32.0(1.26)
20	3/4	MT20-MA-MBS12-	57.0(2.24)	16.0(0.63)	15.1(0.59)	35.0(1.38)	32.0(1.26)
25	1	MT25-MA-MBS16-	65.1(2.56)	18.3(0.72)	19.8(0.78)	41.0(1.61)	38.9(1.53)
28	1	MT28-MA-MBS16-	72.9(2.87)	18.3(0.72)	19.8(0.78)	41.0(1.61)	38.9(1.53)
28	1 1/4	MT28-MA-MBS20-	77.0(3.03)	19.8(0.78)	22.5(0.89)	50.0(1.97)	49.0(1.93)
30	1 1/4	MT30-MA-MBS20-	80.8(3.18)	19.8(0.78)	24.3(0.96)	50.0(1.97)	49.0(1.93)
32	1 1/4	MT32-MA-MBS20-	81.8(3.22)	19.8(0.78)	26.5(1.04)	50.0(1.97)	49.0(1.93)
38	1 1/2	MT38-MA-MBS24-	94.5(3.72)	22.1(0.87)	31.6(1.24)	55.0(2.17)	54.7(2.15)


Metric Tube

ISO Parallel Thread (BP)

T-Tube O.D. (mm)	P-BP Size	Basic Ordering Number	Dimension, in. (mm)				
			L	B	E	F	D
3	1/8	MT3-MA-PMBP2-	31.0(1.22)	7.1(0.28)	1.8(0.07)	14.0(0.55)	13.7(0.54)
4	1/8	MT4-MA-PMBP2-	31.8(1.25)	7.1(0.28)	2.0(0.08)	14.0(0.55)	13.7(0.54)
6	1/8	MT6-MA-PMBP2-	33.3(1.31)	7.1(0.28)	4.0(0.16)	14.0(0.55)	13.7(0.54)
6	1/4	MT6-MA-PMBP4-	38.1(1.50)	11.2(0.44)	4.0(0.16)	19.0(0.75)	17.8(0.70)
8	1/4	MT8-MA-PMBP4-	38.9(1.53)	11.2(0.44)	6.4(0.25)	19.0(0.75)	17.8(0.70)
10	1/4	MT10-MA-PMBP4-	38.9(1.53)	11.2(0.44)	6.4(0.25)	19.0(0.75)	17.8(0.70)
10	3/8	MT10-MA-PMBP6-	39.7(1.56)	11.2(0.44)	7.5(0.30)	22.0(0.87)	21.6(0.85)
10	1/2	MT10-MA-PMBP8-	42.9(1.69)	14.2(0.56)	7.5(0.30)	27.0(1.06)	25.9(1.02)
12	1/4	MT12-MA-PMBP4-	43.7(1.72)	11.2(0.44)	6.4(0.25)	19.0(0.75)	17.8(0.70)
12	3/8	MT12-MA-PMBP6-	44.5(1.75)	11.2(0.44)	7.9(0.31)	22.0(0.87)	21.6(0.85)
12	1/2	MT12-MA-PMBP8-	49.2(1.94)	14.2(0.56)	9.1(0.36)	27.0(1.06)	25.9(1.02)
16	1/2	MT16-MA-PMBP8-	50.8(2.00)	14.2(0.56)	11.9(0.47)	27.0(1.06)	25.9(1.02)
18	3/4	MT18-MA-PMBP12-	53.2(2.09)	16.0(0.63)	14.0(0.55)	33.0(1.30)	32.0(1.26)
20	3/4	MT20-MA-PMBP12-	54.0(2.13)	16.0(0.63)	15.1(0.59)	33.0(1.30)	32.0(1.26)
25	1	MT25-MA-PMBP16-	65.1(2.56)	18.3(0.72)	19.8(0.78)	41.0(1.61)	38.9(1.53)
28	1	MT28-MA-PMBP16-	72.7(2.86)	18.3(0.72)	19.8(0.78)	41.0(1.61)	38.9(1.53)
28	1 1/4	MT28-MA-PMBP20-	77.3(3.04)	19.8(0.78)	22.5(0.89)	50.0(1.97)	49.0(1.93)
30	1 1/4	MT30-MA-PMBP20-	80.8(3.18)	19.8(0.78)	24.3(0.96)	50.0(1.97)	49.0(1.93)
32	1 1/4	MT32-MA-PMBP20-	82.1(3.23)	19.8(0.78)	26.5(1.04)	50.0(1.97)	49.0(1.93)
38	1 1/2	MT38-MA-PMBP24-	94.5(3.72)	22.1(0.87)	31.6(1.24)	55.0(2.17)	54.7(2.15)




25 mm and below




28 mm and above

Female Adapters



1" and below



1 1/4" and above

Fractional Tube

NPT Thread


T-Tube O.D. (in.)	P-NPT Size	Basic Ordering Number	Dimension, in. (mm)			
			L	B	E	F
1/16	1/8	FT1-FA-FNPT2-	1.07(27.2)	0.41(10.4)	0.03(0.8)	0.56(14.3)
1/8	1/8	FT2-FA-FNPT2-	1.24(31.5)	0.41(10.4)	0.08(2.0)	0.56(14.3)
1/8	1/4	FT2-FA-FNPT4-	1.39(35.3)	0.59(15.0)	0.08(2.0)	0.75(19.1)
3/16	1/8	FT3-FA-FNPT2-	1.25(31.8)	0.41(10.4)	0.11(2.9)	0.56(14.3)
3/16	1/4	FT3-FA-FNPT4-	1.41(35.8)	0.59(15.0)	0.12(3.0)	0.75(19.1)
1/4	1/8	FT4-FA-FNPT2-	1.30(33.0)	0.41(10.4)	0.17(4.3)	0.56(14.3)
1/4	1/4	FT4-FA-FNPT4-	1.46(37.1)	0.59(15.0)	0.17(4.3)	0.75(19.1)
1/4	3/8	FT4-FA-FNPT6-	1.55(39.4)	0.59(15.0)	0.17(4.3)	0.87(22.2)
1/4	1/2	FT4-FA-FNPT8-	1.79(45.5)	0.78(19.8)	0.17(4.3)	1.06(27.0)
5/16	1/8	FT5-FA-FNPT2-	1.34(34.0)	0.41(10.4)	0.22(5.6)	0.56(14.3)
5/16	1/4	FT5-FA-FNPT4-	1.48(37.6)	0.59(15.0)	0.22(5.6)	0.75(19.1)
5/16	3/8	FT5-FA-FNPT6-	1.59(40.4)	0.59(15.0)	0.22(5.6)	0.87(22.2)
3/8	1/8	FT6-FA-FNPT2-	1.35(34.3)	0.41(10.4)	0.27(6.9)	0.56(14.3)
3/8	1/4	FT6-FA-FNPT4-	1.50(38.1)	0.59(15.0)	0.27(6.9)	0.75(19.1)
3/8	3/8	FT6-FA-FNPT6-	1.59(40.4)	0.59(15.0)	0.27(6.9)	0.87(22.2)
3/8	1/2	FT6-FA-FNPT8-	1.84(46.7)	0.78(19.8)	0.27(6.9)	1.06(27.0)
1/2	1/4	FT8-FA-FNPT4-	1.71(43.4)	0.59(15.0)	0.37(9.4)	0.75(19.1)
1/2	3/8	FT8-FA-FNPT6-	1.79(45.5)	0.59(15.0)	0.37(9.4)	0.87(22.2)
1/2	1/2	FT8-FA-FNPT8-	2.04(51.8)	0.78(19.8)	0.37(9.4)	1.06(27.0)
5/8	3/8	FT10-FA-FNPT6-	1.86(47.2)	0.59(15.0)	0.47(11.9)	0.87(22.2)
5/8	1/2	FT10-FA-FNPT8-	2.09(53.1)	0.78(19.8)	0.47(11.9)	1.06(27.0)
3/4	1/2	FT12-FA-FNPT8-	2.08(52.8)	0.78(19.8)	0.58(14.7)	1.06(27.0)
3/4	3/4	FT12-FA-FNPT12-	2.16(54.9)	0.81(20.6)	0.58(14.7)	1.31(33.3)
3/4	1	FT12-FA-FNPT16-	2.30(58.4)	1.00(25.4)	0.58(14.7)	1.63(41.3)
7/8	3/4	FT14-FA-FNPT12-	2.22(56.4)	0.81(20.6)	0.58(14.7)	1.31(33.3)
1	3/4	FT16-FA-FNPT12-	2.39(60.7)	0.81(20.6)	0.80(20.3)	1.31(33.3)
1	1	FT16-FA-FNPT16-	2.53(64.3)	1.00(25.4)	0.80(20.3)	1.63(41.3)
1 1/4	1 1/4	FT20-FA-FNPT20-	3.06(77.7)	1.00(25.4)	1.02(25.9)	2.13(54.0)
1 1/2	1 1/2	FT24-FA-FNPT24-	3.50(88.9)	1.09(27.7)	1.25(31.8)	2.37(60.3)

Fractional Tube

ISO Tapered Thread (RT)

T-Tube O.D. (in.)	P-RT Size	Basic Ordering Number	Dimension, in. (mm)			
			L	B	E	F
1/4	1/8	FT4-FA-FBT2-	1.30(33.0)	0.41(10.4)	0.17(4.3)	0.56(14.3)
1/4	1/4	FT4-FA-FBT4-	1.45(36.8)	0.59(15.0)	0.17(4.3)	0.75(19.1)
3/8	1/4	FT6-FA-FBT4-	1.50(38.1)	0.59(15.0)	0.27(6.9)	0.75(19.1)
3/8	3/8	FT6-FA-FBT6-	1.59(40.4)	0.59(15.0)	0.27(6.9)	0.87(22.2)
1/2	1/4	FT8-FA-FBT4-	1.71(43.4)	0.59(15.0)	0.37(9.4)	0.75(19.1)
1/2	3/8	FT8-FA-FBT6-	1.80(45.7)	0.59(15.0)	0.37(9.4)	0.87(22.2)
1/2	1/2	FT8-FA-FBT8-	2.05(52.1)	0.78(19.8)	0.37(9.4)	1.06(27.0)


Female Adapters



Fractional Tube

ISO Parallel Thread (BP)

T-Tube O.D. (in.)	P-BP Size	Basic Ordering Number	Dimension, in. (mm)			
			L	B	E	F
1/8	1/8	FT2-FA-FBP2-	1.17(29.7)	0.40(10.2)	0.08(2.0)	0.56(14.3)
1/4	1/8	FT4-FA-FBP2-	1.25(31.8)	0.40(10.2)	0.17(4.3)	0.56(14.3)
1/4	1/4	FT4-FA-FBP4-	1.50(38.1)	0.60(15.2)	0.17(4.3)	0.75(19.1)
3/8	1/4	FT6-FA-FBP4-	1.55(39.4)	0.60(15.2)	0.27(6.9)	0.75(19.1)
3/8	3/8	FT6-FA-FBP6-	1.57(39.9)	0.60(15.2)	0.27(6.9)	0.94(23.8)
1/2	3/8	FT8-FA-FBP6-	1.78(45.2)	0.60(15.2)	0.38(9.7)	0.94(23.8)
1/2	1/2	FT8-FA-FBP8-	1.95(49.5)	0.72(18.2)	0.38(9.7)	1.06(27.0)




Fractional Tube

AN Thread

T-Tube O.D. (in.)	AN Tube Flare Size(in.)	Basic Ordering Number	Dimension, in. (mm)			
			L	B	E	F
1/8	1/8	FT2-FA-AN2-	0.88(22.4)	0.55(14.0)	0.09(2.4)	0.37(9.5)
1/8	1/4	FT2-FA-AN4-	0.88(22.4)	0.62(15.8)	0.09(2.4)	0.56(14.3)
1/4	1/4	FT4-FA-AN4-	0.96(24.4)	0.62(15.8)	0.18(4.6)	0.56(14.3)
3/8	3/8	FT6-FA-AN6-	1.11(28.1)	0.73(18.5)	0.28(7.1)	0.69(17.5)
1/2	1/2	FT8-FA-AN8-	1.42(36.1)	0.85(21.6)	0.39(9.9)	0.87(22.2)
3/4	3/4	FT12-FA-AN12-	1.49(37.8)	1.03(26.2)	0.58(14.7)	1.25(31.8)

Female Adapters




Metric Tube

ISO Parallel Thread (BG)

T-Tube O.D. (mm)	P-BG Size	Basic Ordering Number	Dimension, in. (mm)			
			L	B	E	F
3	1/8	MT3-FA-FBP2-	28.6(1.13)	6.5(0.26)	1.6(0.06)	14.0(0.55)
3	1/4	MT3-FA-FBP4-	33.5(1.32)	10.2(0.40)	1.9(0.07)	19.0(0.75)
4	1/8	MT4-FA-FBP2-	29.4(1.16)	6.5(0.26)	2.0(0.08)	14.0(0.55)
6	1/8	MT6-FA-FBP2-	31.0(1.22)	6.5(0.26)	4.1(0.16)	14.0(0.55)
6	1/4	MT6-FA-FBP4-	35.3(1.39)	10.2(0.40)	4.1(0.16)	19.0(0.75)
6	3/8	MT6-FA-FBP6-	38.4(1.51)	14.2(0.56)	4.1(0.16)	24.0(0.94)
6	1/2	MT6-FA-FBP8-	42.9(1.69)	18.0(0.71)	4.1(0.16)	27.0(1.06)
8	1/4	MT8-FA-FBP4-	33.0(1.30)	10.2(0.40)	5.5(0.22)	19.0(0.75)
8	3/8	MT8-FA-FBP6-	38.9(1.53)	14.2(0.56)	5.6(0.22)	24.0(0.94)
8	1/2	MT8-FA-FBP8-	43.7(1.72)	18.0(0.71)	5.6(0.22)	27.0(1.06)
10	1/4	MT10-FA-FBP4-	34.5(1.36)	10.2(0.40)	5.5(0.22)	19.0(0.75)
10	3/8	MT10-FA-FBP6-	36.1(1.42)	14.2(0.56)	6.5(0.26)	24.0(0.94)
10	1/2	MT10-FA-FBP8-	41.1(1.62)	18.0(0.71)	7.1(0.28)	27.0(1.06)
12	1/4	MT12-FA-FBP4-	41.1(1.62)	10.2(0.40)	5.5(0.22)	19.0(0.75)
12	3/8	MT12-FA-FBP6-	44.7(1.76)	14.2(0.56)	6.5(0.26)	24.0(0.94)
12	1/2	MT12-FA-FBP8-	48.8(1.92)	18.0(0.71)	7.0(0.28)	27.0(1.06)
16	1/2	MT16-FA-FBP8-	49.0(1.93)	18.0(0.71)	7.0(0.28)	27.0(1.06)
18	1/2	MT18-FA-FBP8-	49.3(1.94)	18.0(0.71)	7.0(0.28)	27.0(1.06)

Female Adapters



Metric Tube


NPT Thread

T-Tube O.D. (mm)	P-NPT Size	Basic Ordering Number	Dimension, in. (mm)			
			L	B	E	F
3	1/8	MT3-FA-FNPT2-	28.8(1.13)	10.4(0.41)	1.3(0.05)	14.0(0.55)
4	1/8	MT4-FA-FNPT2-	33.3(1.31)	10.4(0.41)	2.0(0.08)	14.0(0.55)
6	1/8	MT6-FA-FNPT2-	32.5(1.28)	10.4(0.41)	4.1(0.16)	14.0(0.55)
6	1/4	MT6-FA-FNPT4-	37.1(1.46)	15.0(0.59)	4.1(0.16)	19.0(0.75)
8	1/8	MT8-FA-FNPT2-	35.1(1.38)	10.4(0.41)	6.4(0.25)	14.0(0.55)
8	1/4	MT8-FA-FNPT4-	37.6(1.48)	15.0(0.59)	5.6(0.22)	19.0(0.75)
8	3/8	MT8-FA-FNPT6-	36.5(1.44)	15.0(0.59)	6.4(0.25)	22.0(0.87)
10	1/4	MT10-FA-FNPT4-	38.1(1.50)	15.0(0.59)	7.1(0.28)	19.0(0.75)
10	3/8	MT10-FA-FNPT6-	40.1(1.58)	15.0(0.59)	7.1(0.28)	22.0(0.87)
10	1/2	MT10-FA-FNPT8-	46.5(1.83)	19.8(0.78)	7.1(0.28)	27.0(1.06)
12	1/4	MT12-FA-FNPT4-	43.7(1.72)	15.0(0.59)	8.8(0.35)	19.0(0.75)
12	3/8	MT12-FA-FNPT6-	42.9(1.69)	15.0(0.59)	9.1(0.36)	22.0(0.87)
12	1/2	MT12-FA-FNPT8-	52.3(2.06)	19.8(0.78)	8.8(0.35)	27.0(1.06)
16	1/2	MT16-FA-FNPT8-	49.2(1.94)	19.8(0.78)	12.7(0.50)	27.0(1.06)
18	3/4	MT18-FA-FNPT12-	52.4(2.06)	20.6(0.81)	14.0(0.55)	32.0(1.26)
20	1/2	MT20-FA-FNPT8-	50.0(1.97)	19.8(0.78)	15.0(0.59)	27.0(1.06)
20	3/4	MT20-FA-FNPT12-	53.2(2.09)	20.6(0.81)	15.1(0.59)	32.0(1.26)
25	1	MT25-FA-FNPT16-	66.7(2.63)	25.4(1.00)	19.8(0.78)	41.0(1.61)

Metric Tube

ISO Tapered Thread BSPT)

T-Tube O.D. (mm)	P-BSPT Size	Basic Ordering Number	Dimension, in. (mm)			
			L	B	E	F
3	1/8	MT3-FA-FBT2-	27.8(1.09)	10.4(0.41)	1.8(0.07)	14.0(0.55)
4	1/8	MT4-FA-FBT2-	28.6(1.13)	10.4(0.41)	2.0(0.08)	14.0(0.55)
6	1/8	MT6-FA-FBT2-	33.0(1.30)	10.4(0.41)	4.1(0.16)	14.0(0.55)
8	1/4	MT8-FA-FBT4-	37.6(1.48)	15.0(0.59)	5.6(0.22)	19.0(0.75)
10	1/4	MT10-FA-FBT4-	38.1(1.50)	15.0(0.59)	7.1(0.28)	19.0(0.75)
10	3/8	MT10-FA-FBT6-	36.5(1.44)	15.0(0.59)	7.5(0.30)	22.0(0.87)
10	1/2	MT10-FA-FBT8-	41.3(1.63)	19.8(0.78)	7.5(0.30)	27.0(1.06)
12	1/4	MT12-FA-FBT4-	40.5(1.59)	15.0(0.59)	9.1(0.36)	19.0(0.75)
12	3/8	MT12-FA-FBT6-	43.7(1.72)	15.0(0.59)	9.1(0.36)	22.0(0.87)
12	1/2	MT12-FA-FBT8-	46.8(1.84)	19.8(0.78)	9.1(0.36)	27.0(1.06)
16	1/2	MT16-FA-FBT8-	48.4(1.91)	19.8(0.78)	12.7(0.50)	27.0(1.06)
18	3/4	MT18-FA-FBT12-	52.4(2.06)	20.6(0.81)	14.0(0.55)	32.0(1.26)
20	3/4	MT20-FA-FBT12-	53.2(2.09)	20.6(0.81)	15.1(0.59)	32.0(1.26)
25	1	MT25-FA-FBT16-	66.7(2.63)	25.4(1.00)	19.8(0.78)	41.0(1.61)




Metric Tube

ISO Parallel Thread (BG)

T-Tube O.D. (mm)	P-BG Size	Basic Ordering Number	Dimension, in. (mm)			
			L	B	E	F
6	1/8	MT6-FA-FBP2-	32.0(1.26)	10.2(0.40)	4.1(0.16)	14.0(0.55)
6	1/4	MT6-FA-FBP4-	37.8(1.49)	15.2(0.60)	4.1(0.16)	19.0(0.75)
12	1/2	MT12-FA-FBP8-	49.8(1.96)	18.8(0.74)	8.8(0.35)	27.0(1.06)

Flange Adapters

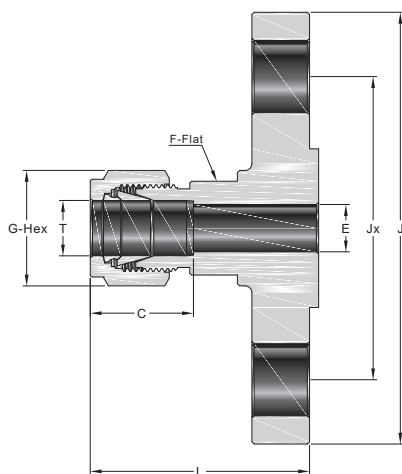

ASME Flanges

T-Tube O.D. (in.)	ASME Flange NPS	Class	Basic Ordering Number Raised Face Flange	Dimension, mm						
				L	J	Jx	E	C	G	F
1/4	1/2	150	F4-FLA-FL8-150-	40.9	88.9	60.5	4.8	15.2	14.3	20.6
3/8	1/2	300	F6-FLA-FL8-150-	45.5	95.3	66.5	7.1	16.8	17.5	20.6
1/2	1/2	150	F8-FLA-FL8-150-	45.2	88.9	60.5	10.4	22.9	22.2	20.6
1/2	1	150	F8-FLA-FL16-150-	48.3	108.0	79.2	10.4	22.9	22.2	20.6
1/2	2	150	F8-FLA-FL32-150-	53.1	152.4	121	10.4	22.9	22.2	20.6
3/4	1	150	F12-FLA-FL16-150-	50.3	108.0	79.2	15.7	24.4	28.6	31.8
1	1	150	F16-FLA-FL16-150-	60.5	108.0	79.2	22.4	31.2	38.1	34.9

DIN/GB Flanges, Pressure Class PN 40

T-Tube O.D. (mm)	DIN Flange Size DN	Basic Ordering Number Raised Face Flange	Dimension, in. (mm)						
			L	J	Jx	E	C	G	F
6	25	M6-FLA-RF25-40C-	47.5(1.87)	115.0(4.53)	85.0(3.35)	4.8(0.19)	15.3(0.60)	14.0(0.55)	20.0(0.79)
12	15	M12-FLA-RF15-40C-	48.5(1.91)	95.0(3.74)	65.0(2.56)	9.5(0.37)	22.8(0.90)	22.0(0.87)	20.0(0.79)
12	25	M12-FLA-RF25-40C-	50.5(1.99)	115.0(4.53)	85.0(3.35)	9.5(0.37)	22.8(0.90)	22.0(0.87)	20.0(0.79)
12	50	M12-FLA-RF50-40C-	55.3(2.18)	165.0(6.50)	125.0(4.92)	9.5(0.37)	22.8(0.90)	22.0(0.87)	20.0(0.79)
18	15	M18-FLA-RF15-40C-	51.8(2.04)	95.0(3.74)	65.0(2.56)	15.1(0.59)	24.4(0.96)	30.0(1.18)	32.0(1.26)
18	25	M18-FLA-RF25-40C-	53.8(2.12)	115.0(4.53)	85.0(3.35)	15.1(0.59)	24.4(0.96)	30.0(1.18)	32.0(1.26)
25	25	M25-FLA-RF25-40C-	64.0(2.52)	115.0(4.53)	85.0(3.35)	21.8(0.86)	31.3(1.23)	38.0(1.50)	35.0(1.38)


EN Flanges, Pressure Class PN 40

T-Tube O.D. (mm)	EN Flange Size DN	Basic Ordering Number Raised Face Flange	Dimension, mm (in.)						
			L	J	Jx	E	C	G	F
6	25	M6-FLA-RF25E-40B1-	47.5(1.87)	115.0(4.53)	85.0(3.35)	4.8(0.19)	15.3(0.60)	14.0(0.55)	20.0(0.79)
12	15	M12-FLA-RF15E-40B1-	48.5(1.91)	95.0(3.74)	65.0(2.56)	9.5(0.37)	22.8(0.90)	22.0(0.87)	20.0(0.79)
12	25	M12-FLA-RF25E-40B1-	50.5(1.99)	115.0(4.53)	85.0(3.35)	9.5(0.37)	22.8(0.90)	22.0(0.87)	20.0(0.79)
12	50	M12-FLA-RF50E-40B1-	55.3(2.18)	165.0(6.50)	125.0(4.92)	9.5(0.37)	22.8(0.90)	22.0(0.87)	20.0(0.79)
18	15	M18-FLA-RF15E-40B1-	51.8(2.04)	95.0(3.74)	65.0(2.56)	15.1(0.59)	24.4(0.96)	30.0(1.18)	32.0(1.26)
18	25	M18-FLA-RF25E-40B1-	53.8(2.12)	115.0(4.53)	85.0(3.35)	15.1(0.59)	24.4(0.96)	30.0(1.18)	32.0(1.26)
25	25	M25-FLA-RF25E-40B1-	64.0(2.52)	115.0(4.53)	85.0(3.35)	21.8(0.86)	31.3(1.23)	38.0(1.50)	35.0(1.38)

JIS Flanges, Pressure Class 10K

T-Tube O.D. (mm)	JIS Flange Size DN	Basic Ordering Number Raised Face Flange	Dimension, in. (mm)						
			L	J	Jx	E	C	G	F
1/4	15	F4-FLA-RF15-10K-	1.66(42.2)	3.74(95.0)	2.76(70.1)	0.19(4.8)	0.60(15.2)	0.56(14.3)	0.81(20.6)
3/8	15	F6-FLA-RF15-10K-	1.72(43.7)	3.74(95.0)	2.76(70.1)	0.28(7.1)	0.66(16.8)	0.69(17.5)	0.81(20.6)
1/2	15	F8-FLA-RF15-10K-	1.83(46.5)	3.74(95.0)	2.76(70.1)	0.41(10.4)	0.90(22.9)	0.87(22.2)	0.81(20.6)
3/4	15	F12-FLA-RF15-10K-	1.91(48.5)	3.74(95.0)	2.76(70.1)	0.62(15.7)	0.96(24.4)	1.13(28.6)	1.25(31.8)
1	25	F16-FLA-RF25-10K-	2.40(61.0)	4.92(125.0)	3.54(89.9)	0.88(22.4)	1.23(31.2)	1.50(38.1)	1.37(34.9)
12mm	15	M12-FLA-RF15-10K-	1.83(46.5)	3.74(95.0)	2.76(70.0)	0.37(9.5)	0.90(22.8)	0.87(22.0)	0.79(20.0)
18mm	15	M18-FLA-RF15-10K-	1.91(48.5)	3.74(95.0)	2.76(70.0)	0.59(15.1)	0.96(24.4)	1.18(30.0)	1.26(32.0)
25mm	25	M25-FLA-RF25-10K-	2.40(61.0)	4.92(125.0)	3.54(90.0)	0.86(21.8)	1.23(31.3)	1.50(38.0)	1.38(35.0)


Sanitary Flange Fittings

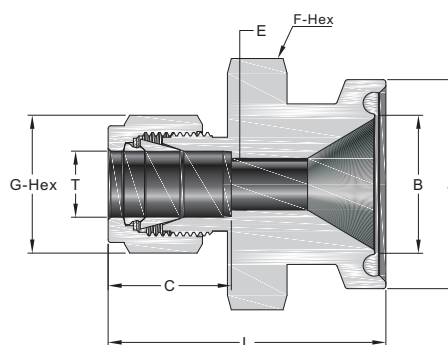

Fractional Tube


T-Tube O.D. (in.)	Flange Size (in.)	Basic Ordering Number	Dimension, in. (mm)						
			L	B	C	E	F	J	G
1/4	1/2	F4-SFF-SC8-	1.57(39.9)	0.37(9.4)	0.60(15.2)	0.19(4.8)	1.00(25.4)	0.98(24.9)	0.98(24.9)
1/4	3/4	F4-SFF-SC12-	1.57(39.9)	0.62(15.7)	0.60(15.2)	0.19(4.8)	1.00(25.4)	0.98(24.9)	0.98(24.9)
1/4	1	F4-SFF-SC16-	1.57(39.9)	0.87(22.1)	0.60(15.2)	0.19(4.8)	1.37(34.9)	1.98(50.3)	1.98(50.3)
1/4	1 1/2	F4-SFF-SC24-	1.57(39.9)	1.37(34.8)	0.60(15.2)	0.19(4.8)	1.37(34.9)	1.98(50.3)	1.98(50.3)
3/8	1/2	F6-SFF-SC8-	1.63(41.4)	0.30(7.6)	0.66(16.8)	0.28(7.1)	1.00(25.4)	0.98(24.9)	0.98(24.9)
3/8	3/4	F6-SFF-SC12-	1.63(41.4)	0.62(15.7)	0.66(16.8)	0.28(7.1)	1.00(25.4)	0.98(24.9)	0.98(24.9)
3/8	1	F6-SFF-SC16-	1.63(41.4)	0.87(22.1)	0.66(16.8)	0.28(7.1)	1.37(34.9)	1.98(50.3)	1.98(50.3)
3/8	1 1/2	F6-SFF-SC24-	1.63(41.4)	1.37(34.8)	0.66(16.8)	0.28(7.1)	1.37(34.9)	1.98(50.3)	1.98(50.3)
1/2	1/2	F8-SFF-SC8-	1.74(44.2)	0.30(7.6)	0.90(22.9)	0.37(9.4)	1.00(25.4)	0.98(24.9)	0.98(24.9)
1/2	3/4	F8-SFF-SC12-	1.74(44.2)	0.62(15.7)	0.90(22.9)	0.41(10.4)	1.00(25.4)	0.98(24.9)	0.98(24.9)
1/2	1	F8-SFF-SC16-	1.74(44.2)	0.87(22.1)	0.90(22.9)	0.41(10.4)	1.37(34.9)	1.98(50.3)	1.98(50.3)
1/2	1 1/2	F8-SFF-SC24-	1.74(44.2)	1.37(34.8)	0.90(22.9)	0.41(10.4)	1.37(34.9)	1.98(50.3)	1.98(50.3)
1	1	F16-SFF-SC16-	1.91(48.5)	0.87(22.1)	1.23(31.2)	0.87(22.1)	1.37(34.9)	1.98(50.3)	1.98(50.3)
1	2	F16-SFF-SC32-	2.49(63.2)	1.37(34.8)	1.23(31.2)	0.88(22.4)	2.75(69.9)	2.52(64.0)	2.52(64.0)

KF Vacuum Flange Fittings



T-Tube O.D. (in.)	Flange Size (in.)	Basic Ordering Number	A in.(mm)	F in.(mm)	G in.(mm)
1/4	KF10	KF10-VFA-F4-	1.47(37.3)	1/2(12.7)	9/16(14.3)
	KF16	KF16-VFA-F4-			
	KF25	KF25-VFA-F4-			
	KF40	KF40-VFA-F4-			
	KF50	KF50-VFA-F4-			
3/8	KF10	KF10-VFA-F6-	1.63(41.4)	5/8(15.9)	11/16(17.5)
	KF16	KF16-VFA-F6-			
	KF25	KF25-VFA-F6-			
	KF40	KF40-VFA-F6-			
	KF50	KF50-VFA-F6-			
1/2	KF25	KF25-VFA-F8-	1.77(45.0)	13/16(20.6)	7/8(22.2)
	KF40	KF40-VFA-F8-			
	KF50	KF50-VFA-F8-			
3/4	KF25	KF25-VFA-F12-	2.14(54.4)	1 1/16(27.0)	1 1/8(28.6)
	KF40	KF40-VFA-F12-			
	KF50	KF50-VFA-F12-			
1	KF25	KF25-VFA-F16-	2.60(66.0)	1 3/8(34.9)	1 1/2(38.1)
	KF40	KF40-VFA-F16-			
	KF50	KF50-VFA-F16-			


Weld Connectors

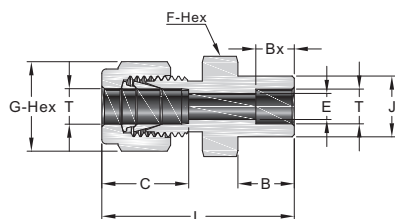

Fractional Tube

Tube Socket Weld

T-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm							
		L	C	G	F	B	E	Bx	J
1/8	F2-WC-FSW2-	29.0	12.7	11.1	11.1	8.6	2.3	2.5	7.9
3/16	F3-WC-FSW3-	29.7	13.7	12.7	11.1	9.5	3.3	4.8	10.7
1/4	F4-WC-FSW4-	33.5	15.2	14.3	12.7	10.4	4.8	7.1	11.2
3/8	F6-WC-FSW6-	37.6	16.8	17.5	15.9	11.9	7.1	7.9	15.7
1/2	F8-WC-FSW8-	41.1	22.9	22.2	20.6	11.9	10.4	9.7	19.1
5/8	F10-WC-FSW10-	41.9	24.4	25.4	23.8	11.9	12.7	10.4	23.4
3/4	F12-WC-FSW12-	43.4	24.4	28.6	27.0	11.9	15.7	11.1	26.7
1	F16-WC-FSW16-	52.6	31.2	38.1	34.9	14.2	22.4	15.7	33.3

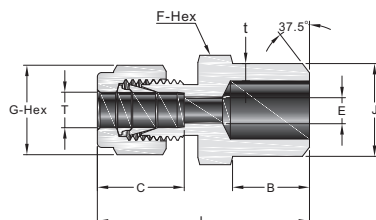


Fractional Tube

Pipe Butt Weld

T-Tube O.D. (in.)	Pipe Weld Size	Basic Ordering Number	Dimension, mm							
			L	C	G	F	E	B	J	t
1/8	1/8	F2-WC-PBW2-	30.5	12.7	11.1	11.1	2.3	9.7	10.3	2.413
3/16	1/8	F3-WC-PBW2-	31.2	13.7	12.7	11.1	3.0	9.7	10.3	2.413
1/4	1/8	F4-WC-PBW2-	32.8	15.2	14.3	12.7	4.8	9.7	10.3	2.413
1/4	1/4	F4-WC-PBW4-	37.8	15.2	14.3	14.3	4.8	14.2	13.7	3.0
5/16	1/8	F5-WC-PBW2-	34.0	16.3	15.9	14.3	5.3	9.7	10.3	2.413
5/16	1/4	F5-WC-PBW4-	38.6	16.3	15.9	14.3	6.4	14.2	13.7	3.0
3/8	1/4	F6-WC-PBW4-	39.9	16.8	17.5	15.9	7.1	14.2	13.7	3.0
3/8	3/8	F6-WC-PBW6-	39.9	16.8	17.5	17.5	7.1	14.2	17.1	3.2
3/8	1/2	F6-WC-PBW8-	46.2	16.8	17.5	22.2	7.1	19.1	21.3	3.7
3/8	3/4	F6-WC-PBW12-	47.8	16.8	17.5	27.0	7.1	19.1	26.7	3.9
1/2	3/8	F8-WC-PBW6-	43.4	22.9	22.2	20.6	10.4	14.2	17.1	3.2
1/2	1/2	F8-WC-PBW8-	49.0	22.9	22.2	22.2	10.4	19.1	21.3	3.7
1/2	3/4	F8-WC-PBW12-	50.5	22.9	22.2	27.0	10.4	19.1	26.7	3.9
5/8	1/2	F10-WC-PBW8-	49.0	24.4	25.4	23.8	12.7	19.1	21.3	3.7
3/4	1/2	F12-WC-PBW8-	50.5	24.4	28.6	27.0	14.0	19.1	21.3	3.7
3/4	3/4	F12-WC-PBW12-	50.5	24.4	28.6	27.0	15.7	19.1	26.7	3.9
1	1	F16-WC-PBW16-	62.2	31.2	38.1	34.9	22.4	23.9	33.4	4.5
1 1/4	1 1/4	F20-WC-PBW20-	77.2	41.1	47.6	44.5	27.7	23.9	42.2	5.1
1 1/2	1 1/2	F24-WC-PBW24-	88.9	50.0	57.2	54.0	34.0	26.2	48.3	5.5

Weld Connectors

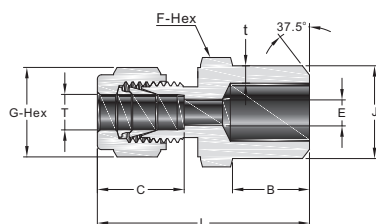


Metric Tube

Pipe Butt Weld

T-Tube O.D. (mm)	Pipe Weld Size	Basic Ordering Number	Dimension, mm						
			L	C	G	F	E	B	J
3	1/8	M3-WC-PBW2-	30.5	12.9	12	12	2.4	9.7	10.3
4	1/8	M4-WC-PBW2-	31.5	13.7	12	12	2.4	9.7	10.3
6	1/8	M6-WC-PBW2-	32.8	15.3	14	14	4.8	9.7	10.3
6	1/4	M6-WC-PBW4-	37.9	15.3	14	14	4.8	14.2	13.7
8	1/8	M8-WC-PBW2-	34.2	16.2	16	15	5.4	9.7	10.3
8	1/4	M8-WC-PBW4-	38.7	16.2	16	15	6.4	14.2	13.7
8	1/2	M8-WC-PBW8-	45.6	16.2	16	22	6.4	19.1	21.3
10	1/4	M10-WC-PBW4-	40.9	17.2	19	18	7.5	14.2	13.7
10	3/8	M10-WC-PBW6-	40.9	17.2	19	18	7.9	14.2	17.2
10	1/2	M10-WC-PBW8-	46.5	17.2	19	22	7.9	19.1	21.3
12	1/4	M12-WC-PBW4-	43.4	22.8	22	22	7.5	14.2	13.7
12	3/8	M12-WC-PBW6-	43.4	22.8	22	22	9.5	14.2	17.1
12	1/2	M12-WC-PBW8-	49.0	22.8	22	22	9.5	19.1	21.3
14	3/8	M14-WC-PBW6-	44.1	24.4	25	24	10.7	14.2	17.1
15	1/2	M15-WC-PBW8-	49.0	24.4	25	24	11.9	19.1	21.3
16	1/2	M16-WC-PBW8-	49.0	24.4	25	24	12.7	19.1	21.3
18	1/2	M18-WC-PBW8-	50.5	24.4	30	27	13.9	19.1	21.3
30	1 1/4	M30-WC-PBW20-	77.2	39.6	50	46	26.2	23.9	42.2
32	1 1/4	M32-WC-PBW20-	79.6	42.0	50	46	28.6	23.9	42.2
38	1 1/2	M38-WC-PBW24-	91.6	49.4	60	55	33.7	26.2	48.3

Weld Elbows

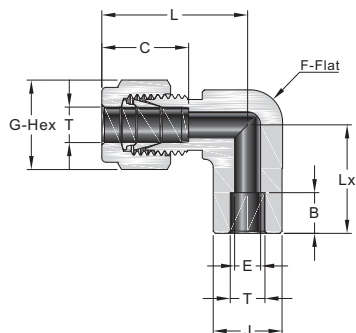


Fractional Tube

Tube Socket Weld

T-Tube O.D. (in.)	Basic Ordering Number	Dimension, mm							
		L	C	G	F	B	E	Lx	J
1/8	F2-WE-FSW2-	16.8	12.7	11.1	9.5	2.5	2.3	16.0	9.7
3/16	F3-WE-FSW3-	18.3	13.7	12.7	11.1	4.8	3.3	17.5	11.2
1/4	F4-WE-FSW4-	26.9	15.2	14.3	12.7	7.1	4.8	19.6	12.7
3/8	F6-WE-FSW6-	30.5	16.8	17.5	15.9	7.9	7.1	23.1	15.7
1/2	F8-WE-FSW8-	36.1	22.9	22.2	20.6	9.7	10.4	25.9	20.6
5/8	F10-WE-FSW10-	29.5	24.4	25.4	27.0	10.4	12.7	29.5	23.9
3/4	F12-WE-FSW12-	39.9	24.4	28.6	27.0	11.2	15.7	29.7	26.9
1	F16-WE-FSW16-	49.0	31.2	38.1	34.9	15.7	22.4	36.8	35.1

Weld Elbows

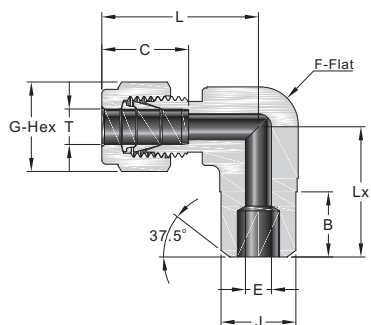


Fractional Tube

Pipe Butt Weld

T-Tube O.D. (in.)	Pipe Weld Size	Basic Ordering Number	Dimension, mm							
			L	C	G	F	B	E	Lx	J
1/8	1/8	F2-WE-PBW2-	23.4	12.7	11.1	11.1	9.7	2.3	18.3	10.3
3/16	1/8	F3-WE-PBW2-	25.7	13.7	12.7	12.7	9.7	3.3	18.8	10.3
1/4	1/8	F4-WE-PBW2-	26.9	15.2	14.3	12.7	9.7	4.8	18.8	10.3
1/4	1/4	F4-WE-PBW4-	26.9	15.2	14.3	12.7	14.2	4.8	23.4	13.7
3/8	1/4	F6-WE-PBW4-	30.5	16.8	17.5	15.9	14.2	7.1	25.4	13.7
1/2	3/8	F8-WE-PBW6-	34.8	22.9	22.2	19.1	14.2	10.4	28.8	17.2
1/2	1/2	F8-WE-PBW8-	36.1	22.9	22.2	20.6	19.1	10.4	33.0	21.3
5/8	1/2	F10-WE-PBW8-	36.3	24.4	25.4	23.8	19.1	12.7	35.1	21.3
3/4	3/4	F12-WE-PBW12-	39.9	24.4	28.6	27.0	19.1	15.7	36.8	26.7
1	3/4	F16-WE-PBW12-	49.3	31.2	38.1	34.9	19.1	22.4	41.9	26.7
1	1	F16-WE-PBW16-	49.3	31.2	38.1	34.9	20.6	22.4	46.7	33.4

Nuts




Fractional Tube

Metric Tube

T-Tube O.D. (in.)	Basic Ordering Number	Dimension, in. (mm)	
		L	G
1/16	N-F1-	0.31(7.9)	0.31(7.9)
1/8	N-F2-	0.47(11.9)	0.44(11.1)
3/16	N-F3-	0.47(11.9)	0.50(12.7)
1/4	N-F4-	0.50(12.7)	0.56(14.3)
5/16	N-F5-	0.53(13.5)	0.63(15.9)
3/8	N-F6-	0.56(14.2)	0.69(17.5)
1/2	N-F8-	0.69(17.5)	0.87(22.2)
5/8	N-F10-	0.69(17.5)	1.00(25.4)
3/4	N-F12-	0.69(17.5)	1.13(28.6)
7/8	N-F14-	0.69(17.5)	1.25(31.8)
1	N-F16-	0.81(20.6)	1.50(38.1)
1 1/8	N-F18-	1.21(30.8)	1.81(46.0)
1 1/4	N-F20-	1.25(31.8)	1.87(47.6)
1 1/2	N-F24-	1.50(38.1)	2.25(57.2)

T-Tube O.D. (mm)	Basic Ordering Number	Dimension, in. (mm)	
		L	G
2	N-M2-	11.9(0.47)	12.0(0.47)
3	N-M3-	11.9(0.47)	12.0(0.47)
4	N-M4-	11.9(0.47)	12.0(0.47)
6	N-M6-	12.7(0.50)	14.0(0.55)
8	N-M8-	13.5(0.53)	16.0(0.63)
10	N-M10-	15.1(0.59)	19.0(0.75)
12	N-M12-	17.4(0.69)	22.0(0.87)
14	N-M14-	17.4(0.69)	25.0(0.98)
15	N-M15-	17.4(0.69)	25.0(0.98)
16	N-M16-	17.4(0.69)	25.0(0.98)
18	N-M18-	17.4(0.69)	30.0(1.18)
20	N-M20-	17.4(0.69)	32.0(1.26)
22	N-M22-	17.4(0.69)	32.0(1.26)
25	N-M25-	20.6(0.81)	38.0(1.50)
28	N-M28-	30.6(1.20)	46.0(1.81)
30	N-M30-	32.7(1.29)	50.0(1.97)
32	N-M32-	34.4(1.35)	50.0(1.97)
38	N-M38-	40.6(1.60)	60.0(2.36)

Male Nuts



Fractional Tube

T-Tube O.D. (in.)	Basic Ordering Number	Dimension, in. (mm)	
		L	G
1/16	MN-F1-	0.38(9.7)	0.25(6.4)
1/8	MN-F2-	0.53(13.5)	0.37(9.5)
1/4	MN-F4-	0.62(15.7)	0.50(12.7)
1/2	MN-F8-	0.87(22.1)	0.94(23.8)

Metric Tube

T-Tube O.D. (mm)	Basic Ordering Number	Dimension, in. (mm)	
		L	G
3	MN-M3-	13.5(0.53)	10.0(0.39)
6	MN-M6-	15.7(0.62)	14.0(0.55)
10	MN-M10-	22.1(0.87)	22.0(0.87)
12	MN-M12-	22.1(0.87)	24.0(0.94)

Front Ferrules



Fractional Tube

T-Tube O.D. (in.)	Basic Ordering Number
1/16	FF-F1
1/8	FF-F2
3/16	FF-F3
1/4	FF-F4
5/16	FF-F5
3/8	FF-F6
1/2	FF-F8
5/8	FF-F10
3/4	FF-F12
7/8	FF-F14
1	FF-F16
1 1/8	FF-F18
1 1/4	FF-F20
1 1/2	FF-F24

Metric Tube

T-Tube O.D. (mm)	Basic Ordering Number
2	FF-M2
3	FF-M3
4	FF-M4
6	FF-M6
8	FF-M8
10	FF-M10
12	FF-M12
14	FF-M14
15	FF-M15
16	FF-M16
18	FF-M18
20	FF-M20
22	FF-M22
25	FF-M25
28	FF-M28
30	FF-M30
32	FF-M32
38	FF-M38

Rear Ferrules




Fractional Tube

T-Tube O.D. (in.)	Basic Ordering Number
1/16	RF-F1
1/8	RF-F2
3/16	RF-F3
1/4	RF-L4
5/16	RF-F5
3/8	RF-L6
1/2	RF-F8
5/8	RF-F10
3/4	RF-F12
7/8	RF-F14
1	RF-F16
1 1/8	RF-F18
1 1/4	RF-F20
1 1/2	RF-F24

Metric Tube

T-Tube O.D. (mm)	Basic Ordering Number
2	RF-M2
3	RF-M3
4	RF-M4
6	RF-M6
8	RF-M8
10	RF-M10
12	RF-M12
14	RF-M14
15	RF-M15
16	RF-M16
18	RF-M18
20	RF-M20
22	RF-M22
25	RF-M25
28	RF-M28
30	RF-M30
32	RF-M32
38	RF-M38

Nuts+ Ferrules



Fractional Tube

T-Tube O.D. (in.)	Basic Ordering Number
1/16	NFR-F1
1/8	NFR-F2
3/16	NFR-F3
1/4	NFR-F4
5/16	NFR-F5
3/8	NFR-F6
1/2	NFR-F8
5/8	NFR-F10
3/4	NFR-F12
7/8	NFR-F14
1	NFR-F16
1 1/8	NFR-F18
1 1/4	NFR-F20
1 1/2	NFR-F24

Metric Tube

T-Tube O.D. (mm)	Basic Ordering Number
2	NFR-M2
3	NFR-M3
4	NFR-M4
6	NFR-M6
8	NFR-M8
10	NFR-M10
12	NFR-M12
14	NFR-M14
15	NFR-M15
16	NFR-M16
18	NFR-M18
20	NFR-M20
22	NFR-M22
25	NFR-M25
28	NFR-M28
30	NFR-M30
32	NFR-M32
38	NFR-M38

Nut - Ferrule Sets



Each Nut-Ferrule Set contains 5 nuts, 5 front ferrules and 5 rear ferrules.

Fractional Tube

T-Tube O.D. (in.)	Basic Ordering Number
1/16	NFS-F1-
1/8	NFS-F2-
3/16	NFS-F3-
1/4	NFS-F4-
5/16	NFS-F5-
3/8	NFS-F6-
1/2	NFS-F8-
5/8	NFS-F10-
3/4	NFS-F12-

Metric Tube

T-Tube O.D. (mm)	Basic Ordering Number
2	NFS-M2-
3	NFS-M3-
4	NFS-M4-
6	NFS-M6-
8	NFS-M8-
10	NFS-M10-
12	NFS-M12-
14	NFS-M14-
15	NFS-M15-
16	NFS-M16-
18	NFS-M18-

Ferrule Sets



Each Ferrule Set contains 10 front ferrules and 10 rear ferrules.


Fractional Tube

T-Tube O.D. (in.)	Basic Ordering Number
1/16	FRS-F1-
1/8	FRS-F2-
3/16	FRS-F3-
1/4	FRS-F4-
5/16	FRS-F5-
3/8	FRS-F6-
1/2	FRS-F8-
5/8	FRS-F10-
3/4	FRS-F12-

Metric Tube

T-Tube O.D. (mm)	Basic Ordering Number
2	FRS-M2-
3	FRS-M3-
4	FRS-M4-
6	FRS-M6-
8	FRS-M8-
10	FRS-M10-
12	FRS-M12-
14	FRS-M14-
15	FRS-M15-
16	FRS-M16-
18	FRS-M18-

Insert for Soft Plastic Tubings



Fractional Tube

T-Tube O.D. (in.)	Tx-Tube I.D. (in.)	Basic Ordering Number	E in. (mm)
3/16	1/8	ISPF-3-2-	0.09(2.3)
1/4	1/8	ISPF-4-2-	0.09(2.3)
1/4	0.17	ISPF-4-017-	0.11(2.8)
1/4	3/16	ISPF-4-3-	0.14(3.5)
5/16	1/8	ISPF-5-2-	0.09(2.3)
5/16	3/16	ISPF-5-3-	0.12(3.0)
5/16	1/4	ISPF-5-4-	0.19(4.8)
3/8	3/16	ISPF-6-3-	0.12(3.0)
3/8	1/4	ISPF-6-4-	0.19(4.8)
1/2	1/4	ISPF-8-4-	0.19(4.8)
1/2	3/8	ISPF-8-6-	0.31(7.9)
5/8	3/8	ISPF-10-6-	0.31(7.9)
5/8	1/2	ISPF-10-8-	0.44(11.1)
3/4	1/2	ISPF-12-8-	0.44(11.1)
3/4	5/8	ISPF-12-10-	0.56(14.2)
1	3/4	ISPF-16-12-	0.69(17.5)

Metric Tube

T-Tube O.D. (mm)	Tx-Tube I.D. (mm)	Basic Ordering Number	E mm (in.)
6	4	ISPM-6-4-	2.8(0.11)
8	6	ISPM-8-6-	4.4(0.17)
10	8	ISPM-10-8-	6.4(0.25)
12	8	ISPM-12-8-	6.4(0.25)
12	10	ISPM-12-10-	8.3(0.33)

BS Gaskets



ISO Parallel Thread Size	Basic Ordering Number	Dimension, in. (mm)		
		T	E	H
1/8	BS-2	0.63(16.0)	0.41(10.4)	0.08(2.0)
1/4	BS-4	0.81 (20.6)	0.54 (13.7)	
3/8	BS-6	0.94 (23.9)	0.68 (17.3)	
1/2	BS-8	1.13 (28.7)	0.85 (21.6)	0.10(2.5)
3/4	BS-12	1.38 (35.1)	1.06 (26.9)	
1	BS-16	1.69 (42.9)	1.33 (33.8)	

Metric Thread Size	Basic Ordering Number	Dimension, mm (in.)		
		T	E	H
M8 x 1	BS-MS8-	13.0(0.51)	8.7(0.34)	1.0(0.04)
M10 x 1	BS-MS10-	16.0(0.63)	10.7(0.42)	
M12 x 1.5	BS-MS12-	18.0(0.63)	12.7(0.42)	
M14 x 1.5	BS-MS14-	22.0(0.71)	14.7(0.50)	
M16 x 1.5	BS-MS16-	24.0(0.87)	16.7(0.66)	
M18 x 1.5	BS-MS18-	26.0(0.94)	18.7(0.74)	
M20 x 1.5	BS-MS20-	28.0(1.02)	20.7(0.81)	2.0(0.08)
M22 x 1.5	BS-MS22-	30.0(1.10)	22.7(0.89)	
M24 x 1.5	BS-MS24-	32.0(1.20)	24.7(1.00)	
M27 x 2	BS-MS27-	36.0(1.30)	27.2(1.10)	
M30 x 2	BS-MS30-	39.0(1.40)	30.7(1.20)	
M33 x 2	BS-MS33-	42.0(1.50)	33.7(1.30)	
M36 x 2	BS-MS36-	48.0(1.70)	37.0(1.50)	2.5(0.10)
M39 x 2	BS-MS39-	51.0(1.90)	40.0(1.60)	
M42 x 2	BS-MS42-	53.0(2.00)	42.7(1.70)	
M45 x 2	BS-MS45-	57.0(2.10)	46.0(1.80)	3.0(0.12)
M48 x 2	BS-MS48-	59.0(2.20)	48.7(1.90)	

The BS gasket provides a seal with male ISO parallel threads.
The gasket consists of a fluorocarbon FKM or Buna inner ring bonded to a carbon steel or stainless steel outer ring.

Ordering Information

Add the material designator as a prefix to the basic ordering number to complete the ordering number.


Ring		Designator
Outer	Inner	
Stainless Steel	FKM	316, 304
Carbon Steel	Buna-N	CS

Example:

A BS gasket with a Buna inner ring bonded to carbon steel outer ring provides a seal with 1/8 male ISO parallel thread, the complete ordering number is BS-2-CS.

BS gasket can be used with BS fitting only.

BP Gaskets




ISO Parallel Thread Size	Basic Ordering Number	Dimension, in. (mm)		
		T	E	H
1/8	BP-2-	0.59(15.0)	0.39(9.9)	0.04(1.0)
1/4	BP-4-	0.75(19.1)	0.52(13.2)	0.06(1.5)
3/8	BP-6-	0.91(23.1)	0.66(16.8)	
1/2	BP-8-	1.06(26.9)	0.83(21.1)	0.08(2.0)
3/4	BP-12-	1.30(33.0)	1.05(26.7)	
1	BP-16-	1.58(40.1)	1.31(33.2)	

Metric Thread Size	Basic Ordering Number	Dimension, mm (in.)		
		T	E	H
M8 x 1	BP-MS8-	13.2(0.52)	8.2(0.32)	1.5(0.06)
M10 x 1	BP-MS10-	15.2(0.60)	10.2(0.40)	
M12 x 1.5	BP-MS12-	18.2(0.60)	12.2(0.40)	2.0(0.08)
M14 x 1.5	BP-MS14-	20.2(0.72)	14.2(0.48)	
M16 x 1.5	BP-MS16-	22.2(0.80)	16.2(0.64)	
M18 x 1.5	BP-MS18-	24.2(0.87)	18.2(0.72)	
M20 x 1.5	BP-MS20-	26.2(0.95)	20.2(0.80)	
M22 x 1.5	BP-MS22-	28.2(1.03)	22.2(0.87)	
M24 x 1.5	BP-MS24-	30.2(1.10)	24.2(1.00)	2.5(0.10)
M27 x 2	BP-MS27-	33.3(1.20)	27.2(1.10)	
M30 x 2	BP-MS30-	37.3(1.30)	30.2(1.20)	
M33 x 2	BP-MS33-	40.3(1.50)	33.2(1.30)	
M36 x 2	BP-MS36-	43.3(1.60)	36.2(1.40)	
M39 x 2	BP-MS39-	47.3(1.70)	39.2(1.50)	
M42 x 2	BP-MS42-	50.3(1.90)	42.2(1.70)	
M45 x 2	BP-MS45-	53.3(2.00)	45.2(1.80)	
M48 x 2	BP-MS48-	56.3(2.10)	48.2(1.90)	

The BP gasket provides a seal with male ISO parallel threads.
The BP gasket may be used with a BP fitting.

BG Gaskets



ISO Parallel Thread Size	Basic Ordering Number	Dimension, in. (mm)		
		T	E	H
1/4	BG-4	0.42(10.7)	0.30(7.6)	0.07(1.8)
3/8	BG-6	0.56(14.2)	0.34(8.6)	0.09(2.3)
1/2	BG-8	0.70(17.8)	0.36(9.1)	0.10(2.5)

ISO Parallel Thread Size	Basic Ordering Number	Dimension, in. (mm)		
		T	E	H
M10 x 1	BG-MS10-	8.3(0.33)	3.3(0.13)	1.5(0.06)
M12 x 1.5	BG-MS12-	9.7(0.38)	5.4(0.21)	
M14 x 1.5	BG-MS14-	11.7(0.38)	6.4(0.21)	2.0(0.08)
M16 x 1.5	BG-MS16-	13.7(0.46)	8.4(0.25)	
M18 x 1.5	BG-MS18-	15.7(0.54)	10.0(0.39)	
M20 x 1.5	BG-MS20-	17.6(0.62)	11.4(0.45)	
M22 x 1.5	BG-MS22-	19.6(0.69)	13.4(0.53)	
M24 x 1.5	BG-MS24-	21.6(0.77)	14.8(0.58)	
M27 x 2	BG-MS27-	24.0(0.90)	13.9(0.50)	2.5(0.10)
M30 x 2	BG-MS30-	27.0(0.90)	19.5(0.80)	
M33 x 2	BG-MS33-	30.0(1.10)	21.5(0.80)	
M36 x 2	BG-MS36-	33.0(1.20)	23.5(0.90)	
M39 x 2	BG-MS39-	36.0(1.30)	24.5(1.00)	
M42 x 2	BG-MS42-	38.9(1.40)	29.5(1.20)	
M45 x 2	BG-MS45-	41.9(1.50)	30.0(1.20)	
M48 x 2	BG-MS48-	44.9(1.60)	32.5(1.30)	

Ordering Information

Add the material designator as a postfix to the basic ordering number to complete the ordering number.

Material	Designator
Copper	BR
316L SS	316L
PTFE	T

Vulcanized Fibre and PTFE cannot be used for BG gasket.

Example:

BP-8-BR, BG-4-316, BG-MS14-BR.

O-rings



O-rings for Fittings with SAE/MS Straight Threads

SAE/MS Thread Size	Ordering Number	Material
5/16-24	FKM9-902	90 Durometer Fluorocarbon FKM
3/8-24	FKM9-903	
7/16-20	FKM9-904	
1/2-20	FKM9-905	
9/16-18	FKM9-906	
3/4-16	FKM9-908	
7/8-14	FKM9-910	
1 1/16-12	FKM9-912	
1 3/16-12	FKM9-914	
1 5/16-12	FKM9-916	
1 5/8-12	FKM9-920	
1 7/8-12	FKM9-924	

O-rings for Fittings with O-Seal Pipe Threads

NPT/ISO Thread Size	Ordering Number	Material
1/8	NBR7-013	70 Durometer NBR
1/4	NBR7-113	
3/8	NBR7-116	
1/2	NBR7-118	

O-rings for Positionable Fittings with ISO Parallel Threads

ISO Parallel Thread Size	Ordering Number	Material
1/8	FKM9-502	90 Durometer Fluorocarbon FKM
1/4	FKM9-111	
3/8	FKM9-113	
1/2	FKM9-508	
3/4	FKM9-119	
1	FKM9-217	


O-rings for Fittings with O-Seal Straight Threads

SAE/MS Thread Size	Ordering Number	Material
5/16-24	NBR7-011	70 Durometer NBR
3/8-24	NBR7-012	
7/16-20	NBR7-013	
1/2-20	NBR7-112	
9/16-18	NBR7-113	
3/4-16	NBR7-116	
1 1/16-12	NBR7-121	
1 5/16-12	NBR7-125	

How to Order

F8 — MBT — F8 — NPT8 — 316

Port 1 Type	Port 1 Size	Configuration Designator	Port 2 Type	Port 2 Size	Port 3 and Port 4	Material
M Metric Ferrule	1 1/16 in.	MC Male Connector	Same as the Port 1 or as follow :	Same as the Port 1 or as follow :	Same as the Port 1	316 316 S.S.
F Fractional Ferrule	2 1/8 in. or 2 mm	BMC Bulkhead Male Connector	FNPT Female NPT	5 M5 x 0.8 or 5/16-24		316L 316L S.S
	3 3/16 in. or 3 mm	TC Thermocouple Connector	NPT Male NPT	6 M6 x 1 or 3/8-24		304 304 S.S.
	4 1/4 in. or 4 mm	FC Female Connector	NPTO O-ring with Male NPT	7 7/16-20		304L 304L S.S.
	5 5/16 in.	BFC Bulkhead Female Connector	FBT Female BSPT	8 M8 x 1 or 1/2-20		A20 Alloy 20
	6 3/8 in. or 6 mm	U Union	MBT Male BSPT	9 9/16-18		A400 Alloy 400
	8 1/2 in. or 8 mm	ME Male Elbow	MBTO O-ring with Male BSPT	10 M10 x 1		A600 Alloy 600
	10 5/8 in. or 10 mm	45ME 45° Male Elbow	FBP Female BSPP	12 M12 x 1.5 or 3/4-16		A825 Alloy 825
	12 3/4 in. or 12 mm	PME Positionable Male Elbow	PMBP Male BSPP (for BP)	14 M14 x 1.5 or 7/8-14		A276 Alloy C276
	14 7/8 in. or 14 mm	FE Female Elbow	MBS Male BSPP (for BS)	16 M16 x 1.5		DU7 Duplex 2507
	15 15 mm	UE Union Elbow	MBP Male BSPP (for BG)	17 1 1/16-12		BR Brass
	16 1 in. or 16 mm	MRT Male Run Tee	FMS Female ISO	18 M18 x 1.5		CS Carbon steel
	18 1 1/8 in. or 18 mm	MBT Male Branch Tee	MS Male ISO (for BG)	19 1 3/16-12		TI Titanium (grade4)
	20 1 1/4 in. or 20 mm	PMRT Positionable Male Run Tee	BPMS Male ISO (for BP)	20 M20 x 1.5		
	22 22 mm	PMBT Positionable Male Branch Tee	BSMS Male ISO (for BS)	21 1 5/16 -12		
	24 1 1/2 in. or 24 mm	FRT Female Run Tee	OMS O-ring with Male ISO	22 M22 x 1.5		
	25 25 mm	FBT Female Branch Tee	FST Female SAE	24 M24 x 1.5		
	28 28 mm	UT Union Tee	MST Male SAE (for BG)	26 1 5/8 -12		
	30 30 mm	UC Union Cross	BPST Male SAE (for BP)	27 M27 x 2		
	32 2 in. or 32 mm	CA Cap	BSST Male SAE (for BS)	30 1 7/8 -12		
	38 38 mm	PL Plug	OST O-ring with Male SAE			
	50 50 mm	R Reducer	PPT Positionable BSP Parallel Thread			
		PC Port Connector	PMS Positionable ISO Parallel Thread			
		MA Male Adapter	PST Positionable SAE Parallel Thread			
		FA Female Adapter	AN 37° Flare			
		WC Weld Connector	FSW Fractional Tube Socket Weld			
		WE Weld Elbow	FBW Fractional Tube Butt Weld			
		FLA Flange Adapter	MSW Metric Tube Socket Weld			
		SFF Sanitary Flange Fitting	MBW Metric Tube Butt Weld			
		N Nut				
		MN Male Nut				
		RF Rear Ferrule				
		FF Front Ferrule				
		FR Ferrules				
		NFR Nut + Ferrules				



BR-Bulkhead Reducer



Introduction

Hikelok tube fittings are available in a variety of materials, including optimized 316 stainless steel chemistry with elevated nickel, chromium, and other elements for superior corrosion resistance in a variety of applications, including chemical processing, sour gas and subsea systems. Hikelok continues to improve the performance and reliability of the tube fitting for use in thousands of diverse applications—including research, alternative fuels, analytical and process instrumentation, oil and gas, power, petrochemical, and semiconductor industries.

Features

- Twin ferrule fittings provide metal-to-metal seal connections, non-elastomeric seals for leak-free connections
- Hikelok twin ferrule fittings are designed to have a maximum allowable working pressure that is higher than that of any tubing
- Industry standard design for all instrumentation grade tubing
- Stainless steel tube hardness: the hardness of the tube shall be not greater than 85 HRB
- Available in sizes from 1/16 to 2 in and 2 mm to 50 mm
- Hikelok fittings materials include 316 stainless steel, steel, brass, aluminum, nickel-copper, Hastelloy C, 6Mo, Incoloy 625 and 825
- Hikelok special treated back ferrule is to provide secure
- Silver coated threads to reduce galling
- Leak-proof joints capable of satisfying high pressure vacuum and vibration applications

Advantages

- Hydraulic proof pressure test (1.5 times the maximum permissible working pressure): no leakage
- Dismantling and reassembly test (dismantle 10 times): no leakage
- Minimum hydrostatic pressure test (4 times the maximum permissible ambient pressure rating): no leakage
- Vacuum test (1×10^{-4} mbar or greater): the leak rate less than 1×10^{-8}
- Proven design, manufacturing excellence, and superior raw materials combine to ensure that every Hikelok fitting meets our customers' highest expectations
- Hikelok tube fittings deliver a leak-tight, gas-tight seal in an easy-to-install, disassemble, and reassemble form

More Options

- Optional Instrumentation Pipe Fittings
- Optional Instrumentation Weld Fittings
- Optional O-Ring Face Seal Fittings
- Optional Miniature Butt-Weld Fittings
- Optional Long Arm Butt-Weld Fittings
- Optional Automatic Tube Butt Weld Fittings
- Optional Metal Gasket Face Seal Fittings
- Optional Vacuum Fittings
- Optional Vacuum Adapter Fittings

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	

Эл. почта hka@nt-rt.ru || Сайт: <https://hikelok.nt-rt.ru/>