

Игольчатые клапаны NV6

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93


Features

- ❖ Maximum working pressure up to 300 psig (20.6 bar)
- ❖ Working temperature from -20°F to 200°F (-28°C to 93°C)
- ❖ One-piece forged body
- ❖ Straight, angle and cross flow patterns
- ❖ Opens and closes quickly
- ❖ Soft-seat shutoff
- ❖ O-ring stem seal needs no adjustment

Pressure vs. Temperature


Orifice in. (mm)	Temperature °F (°C)	Working Pressure psig (bar)
0.080 (2.0)	-20 to 200 (-28 to 93)	300 psig
0.125 (3.2)		200 psig
0.250 (6.4)		

Standard Materials of Construction

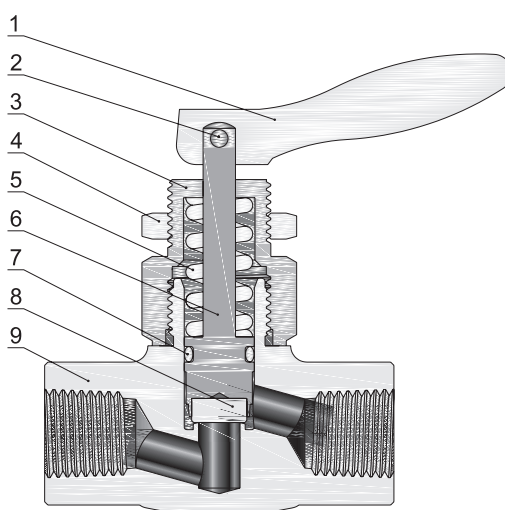

Item	Component	Material Grade/ASTM Specification		
		316 S.S.	304 S.S.	Brass
1	Handle	Stainless steel		
2	Pin	Stainless steel		
3	Bonnet	316 S.S./A276	304 S.S./A276	Brass 360/B16
4	Nut	316 S.S./B783		Brass 360/B16
5	Spring	PTFE-plated S17700/A313		
6	Stem	316 S.S./A276	304 S.S./A276	
7	O-ring	Fluorocarbon FKM		
8	Stem Tip	PTFE/D1710		
9	Body	316 S.S./A276	304 S.S./A276	Brass 377/B283

Dimensions

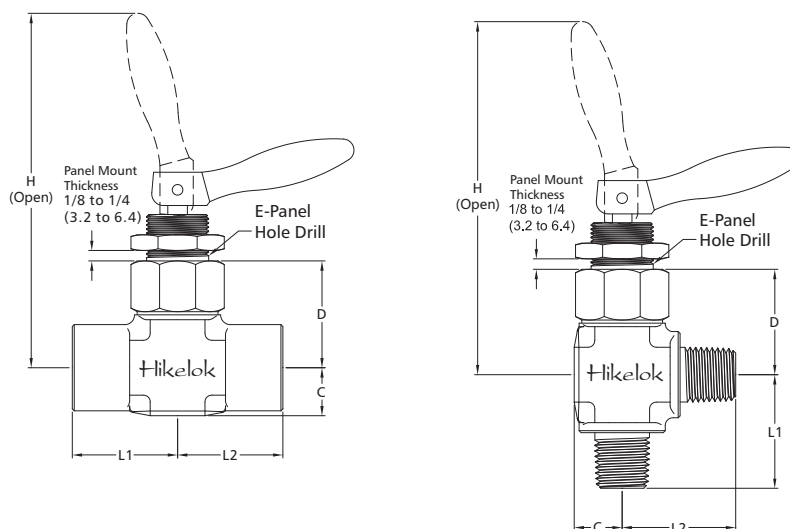

Basic Ordering Number	Connection Type and Size	Orifice in. (mm)	Cv	Dimension, in. (mm)					
				L1	L2	C	D	E	H
NV6-NPT2-02-	1/8 Male NPT	0.08 (2.0)	0.11	0.75 (19.0)	0.75 (19.0)	0.31 (7.9)	0.92 (23.4)	0.53 (13.5)	2.87 (72.9)
NV6-NPT2-F2-02-	1/8 Male NPT			0.75 (19.0)	0.98 (25.0)				
NV6-F2-02-	1/8" Hikelok			0.98 (25.0)	0.98 (25.0)				
NV6-M3-02-	3 mm Hikelok								
NV6-FNPT2-03-	1/8 Female NPT	0.125 (3.2)	0.20	0.81 (20.6)	0.81 (20.6)	0.39 (9.9)	0.92 (23.4)	0.53 (13.5)	2.87 (72.9)
NV6-NPT2-03-	1/8 Male NPT			0.86 (21.8)	0.86 (21.8)				
NV6-NPT4-03-	1/4 Male NPT			25.0 (0.98)	25.0 (0.98)				
NV6-NPT4-F4-03-	1/4 Male NPT			25.0 (0.98)					
NV6-F4-03-	1/4" Hikelok			1.13 (28.7)	1.13 (28.7)				
NV6-M6-03-	6 mm Hikelok								
NV6-M8-03-	8 mm Hikelok								
NV6-FNPT4-06-	1/4 Female NPT	0.25 (6.4)	0.70	1.06 (26.9)	1.06 (26.9)	0.5 (12.7)	1.06 (26.9)	0.66 (16.8)	3.56 (90.4)
NV6-FNPT6-06-	3/8 Female NPT			1.12 (28.4)	1.12 (28.4)				
NV6-NPT6-06-	3/8 Male NPT			1.29 (32.8)	1.29 (32.8)				
NV6-F6-06-	3/8" Hikelok			1.4 (35.6)	1.4 (35.6)				
NV6-F8-06-	1/2" Hikelok			1.36 (34.5)	1.36 (34.5)				
NV6-M10-06-	10 mm Hikelok			1.46 (37.1)	1.46 (37.1)				
NV6-M12-06-	12 mm Hikelok			1.50 (38.1)	1.50 (38.1)				
NV6-MS20-06-	M20 x 1.5 Male ISO								
NV6-MS22-06-	M22 x 1.5 Male ISO								

How to Order

NV6 — **NPT4** — **F4** — **03** — **Z** — **A** — **316**

Series	Inlet Type	Inlet Size	Outlet Type	Outlet Size	Orifice Size	O-Ring Material	Flow Pattern	Body Material
NV6	FNPT Female NPT	2 1/8 in.	Same as inlet type and inlet size		02 0.080 in. (2.0 mm)	Fluorocarbon FKM	Straight	316 316 S.S.
	NPT Male NPT	4 1/4 in.					A Angle	316L 316L S.S.
	FBT Female BSPT	6 3/8 in. or 6 mm	If outlet and inlet are the same, eliminate the outlet designator		03 0.125 in. (3.2 mm)	B Buna N		304 304 S.S.
	MBT Male BSPT	8 1/2 in. or 8 mm			06 0.25 in. (6.4 mm)	E Ethylene Propylene		304L 304L S.S.
	FMS Female ISO	10 10 mm				N Neoprene		
	MS Male ISO	12 3/4 in. or 12 mm				Z Kalrez		
	FBP Female BSPP							
	MBP Male BSPP							
	F Fractional Tube Fitting							
	M Metric Tube Fitting							

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93