

Фильтры F2

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Features


- ❖ Compact inline design
- ❖ Nominal pore sizes for sintered element: 0.5, 2, 7, 15, 40, 60 and 90 µm
- ❖ Nominal pore sizes for strainer element: 100, 150, 250 and 450 µm
- ❖ Maximum working pressure up to 3000 psig (207 bar)
- ❖ Working temperature from -20°F to 900°F (-28°C to 482°C)
- ❖ Body materials: 316 S.S. 316L S.S. 304 S.S. 304L S.S. 321 S.S. and Brass
- ❖ Variety of end connections

Pressure vs. Temperature

Material	316 S.S.	Brass
Temperature, °F(°C)	Working Pressure, psig (bar)	
-20 (-28) to 100 (37)	3000 (207)	1000 (68.9)
200 (93)	2580 (177)	780 (53.7)
300 (148)	2330 (160)	680 (46.8)
400 (204)	2140 (147)	—
500 (260)	1990 (137)	—
600 (315)	1880 (129)	—
650 (343)	1845 (127)	—
700 (371)	1800 (124)	—
750 (398)	1760 (121)	—
800 (426)	1725 (118)	—
850 (454)	1690 (116)	—
900 (482)	1640 (112)	—

Standard Materials of Construction

Component		Material Grade/ASTM Specification	
		316 S.S.	Brass
1	Inlet Body	316 S.S./A479	Brass C36000/B16
2	Spring	304 S.S./A313	
3	Element	Sintered 316 S.S. or strainer 316 S.S.	
4	Outlet Body	316 S.S./A479	Brass C36000/B16

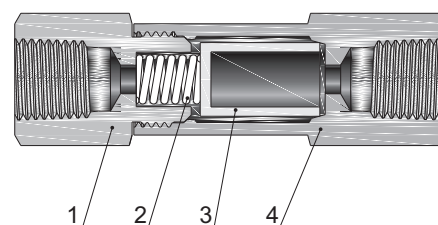


Maximum Differential Pressure of Clean Filter at 70°F (20°C)

Maximum Differential Pressure psig (bar)										
0.5 micron	2 micron	7 micron	15 micron	40 micron	60 micron	90 micron	100 micron	150 micron	250 micron	450 micron
2250 (155.2)	2250 (155.2)	1950 (134.5)	1750 (120.3)	1150 (79.3)	1150 (79.3)	1000 (68.9)	1000 (68.9)	1000 (68.9)	1000 (68.9)	1000 (68.9)

Elements

Nominal Pore Size µm	Pore Size Range µm	Element Type
0.5	0.5 to 2	Sintered
2	1 to 4	
7	5 to 10	
15	11 to 25	
40	35 to 53	
60	50 to 75	
90	75 to 100	
100	—	Strainer
150	—	
250	—	
450	—	

Dimensions

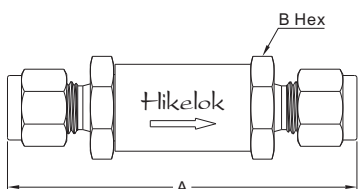

Basic Ordering Number	Connection Type and Size	Orifice in.(mm)	Filter Series	Dimension, in. (mm)	
				A	B
F2-F2-	1/8" Hikelok	0.094 (2.39)	2	2.35 (59.7)	9/16 (14.3)
F2-F4-	1/4" Hikelok	0.187 (4.75)	4	2.95 (74.9)	3/4 (19.0)
F2-F6-	3/8" Hikelok	0.281 (7.14)	8	3.21 (81.5)	1 (25.4)
F2-F8-	1/2" Hikelok	0.406 (10.3)	8	3.49 (88.6)	
F2-M3-	3 mm Hikelok	0.094 (2.39)	2	2.38 (60.5)	9/16 (14.3)
F2-M6-	6 mm Hikelok	0.187 (4.75)	4	2.96 (75.2)	3/4 (19.0)
F2-FNPT2-	1/8 Female NPT	0.094 (2.39)	2	2.16 (54.9)	9/16 (14.3)
F2-FNPT4-	1/4 Female NPT	0.187 (4.75)	4	2.87 (72.9)	3/4 (19.0)
F2-NPT2-	1/8 Male NPT	0.094 (2.39)	2	1.88 (47.7)	9/16 (14.3)
F2-NPT4-	1/4 Male NPT	0.187 (4.75)	4	2.69 (68.3)	3/4 (19.0)
F2-GFS2-	1/8 Male GFS	0.094 (2.39)	2	2.79 (70.8)	
F2-GFS4-	1/4 Male GFS	0.187 (4.75)	4		
F2-FBT2-	1/8 Female BSPT	0.094 (2.39)	2	2.16 (54.9)	9/16 (14.3)
F2-FBT4-	1/4 Female BSPT	0.187 (4.75)	4	2.87 (72.9)	3/4 (19.0)
F2-MBT2-	1/8 Male BSPT	0.094 (2.39)	2	1.88 (47.7)	9/16 (14.3)
F2-MBT4-	1/4 Male BSPT	0.187 (4.75)	4	2.69 (68.3)	3/4 (19.0)

How to Order

F2 — **F6** — **M10** — **S90** — **B4** — **316**

Filter Series	Inlet Type	Inlet Size	Outlet Type	Outlet Size	Element Type	Element Nominal Pore Size	Bypass Port for F1	Body Material
F2	FNPT Female NPT	2 1/8 in.	Same as inlet type and inlet size		S Sintered	Sintered	None	316 316 S.S.
	NPT Male NPT	4 1/4 in.			T Strainer	05 0.5µm	B2 FNPT2	316L 316L S.S.
	FBT Female BSPT	6 3/8 in. or 6 mm	If outlet and inlet are the same, eliminate the outlet designator			2 2µm	B4 FNPT4	304 304 S.S.
	MBT Male BSPT	8 1/2 in. or 8 mm				7 7µm	B8 FNPT8	304L 304L S.S.
	FMS Female ISO 261	10 10 mm				15 15µm	F2 F2	BR Brass
	MS Male ISO 261	12 3/4 in. or 12 mm				40 40µm	F4 F4	
	FBP Female BSPP	14 14 mm or M14 x 1.5				60 60µm	F6 F6	
	MBP Male BSPP	16 1 in. or 16 mm				90 90µm	F8 F8	
	F Fractional Tube Fitting	18 18 mm				Strainer		
	M Metric Tube Fitting	20 1 1/4 in. or 20 mm				100 100µm		
	FSW Fractional Tube Socket Weld	22 22 mm or M22 x1.5				150 150µm		
	FBW Fractional Tube Butt Weld	25 25 mm				250 250µm		
	GFS Male GFS Fitting					450 450µm		

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Россия (495)268-04-70

Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Казахстан (7172)727-132

Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93